


---

**113001****PC35G/6****2-BURNER GAS BOILING TOP (TOP VERSION)**

---



- 2-burner gas boiling top (35 cm top version).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Aluminium burners fixed to the worktop with a single ring (3.0 kW and 3.6 kW).
- Aluminium flame spreader with enamelled cast iron lid.
- Burner activation using a piezoelectric device.
- Safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- Plastic feet (H=51 mm).
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

---

**TECHNICAL DATA**

|                           |                          |                           |               |
|---------------------------|--------------------------|---------------------------|---------------|
| TOTAL POWER               | 6,6 kW                   | GAS POWER                 | 6,6 kW        |
| OPEN BURNER POWER         | 1x3 + 1x3,6 n°- kW       | BOILING TOP POWER         | 6,6 kW        |
| NATURAL GAS CONSUMPTION   | 0,69 m³/h                | NUMBER OF BURNERS         | n° 2          |
| BOILING PAN SUPPORT       | RAAF enamelled cast iron | CE GAS CERTIFICATE NUMBER | CE-0085AQ1145 |
| GAS CONNECTION DIAMETER   | 1/2"G EN10226-1          | GAS CONNECTION HEIGHT (H) | 0 mm          |
| GAS CONNECTION HEIGHT (X) | 305 mm                   | GAS CONNECTION HEIGHT (Y) | -100 mm       |
| FOOT HEIGHT               | 51 mm                    | WIDTH                     | 35 cm         |
| DEPTH                     | 60 cm                    | HEIGHT                    | 30 cm         |
| PACKAGE WIDTH             | 71,0 cm                  | PACKAGE DEPTH             | 42 cm         |
| PACKAGE HEIGHT            | 54 cm                    | NET WEIGHT                | 13,2000 kg    |
| GROSS WEIGHT              | 16,5 kg                  | VOLUME                    | 0,16 m³       |
| HARMONISED CODE           | 84198180                 | LPG CONSUMPTION           | 0.52 m³/h     |
| LATENT HEAT RELEASE       | 792.0 W                  | SENSIBLE HEAT RELEASE     | 1980.0 W      |
| STEAM RELEASE             | 1161.6 g/h               |                           |               |

---

**ACCESSORIES**

|        |                            |
|--------|----------------------------|
| 120585 | JOINT FOR TECNO60, TECNO65 |
| 120655 | PAN SUPPORT REDUCER        |
| 120665 | TECNO60 SPLASHBACK L=350MM |

INSTALLATION SCHEMES

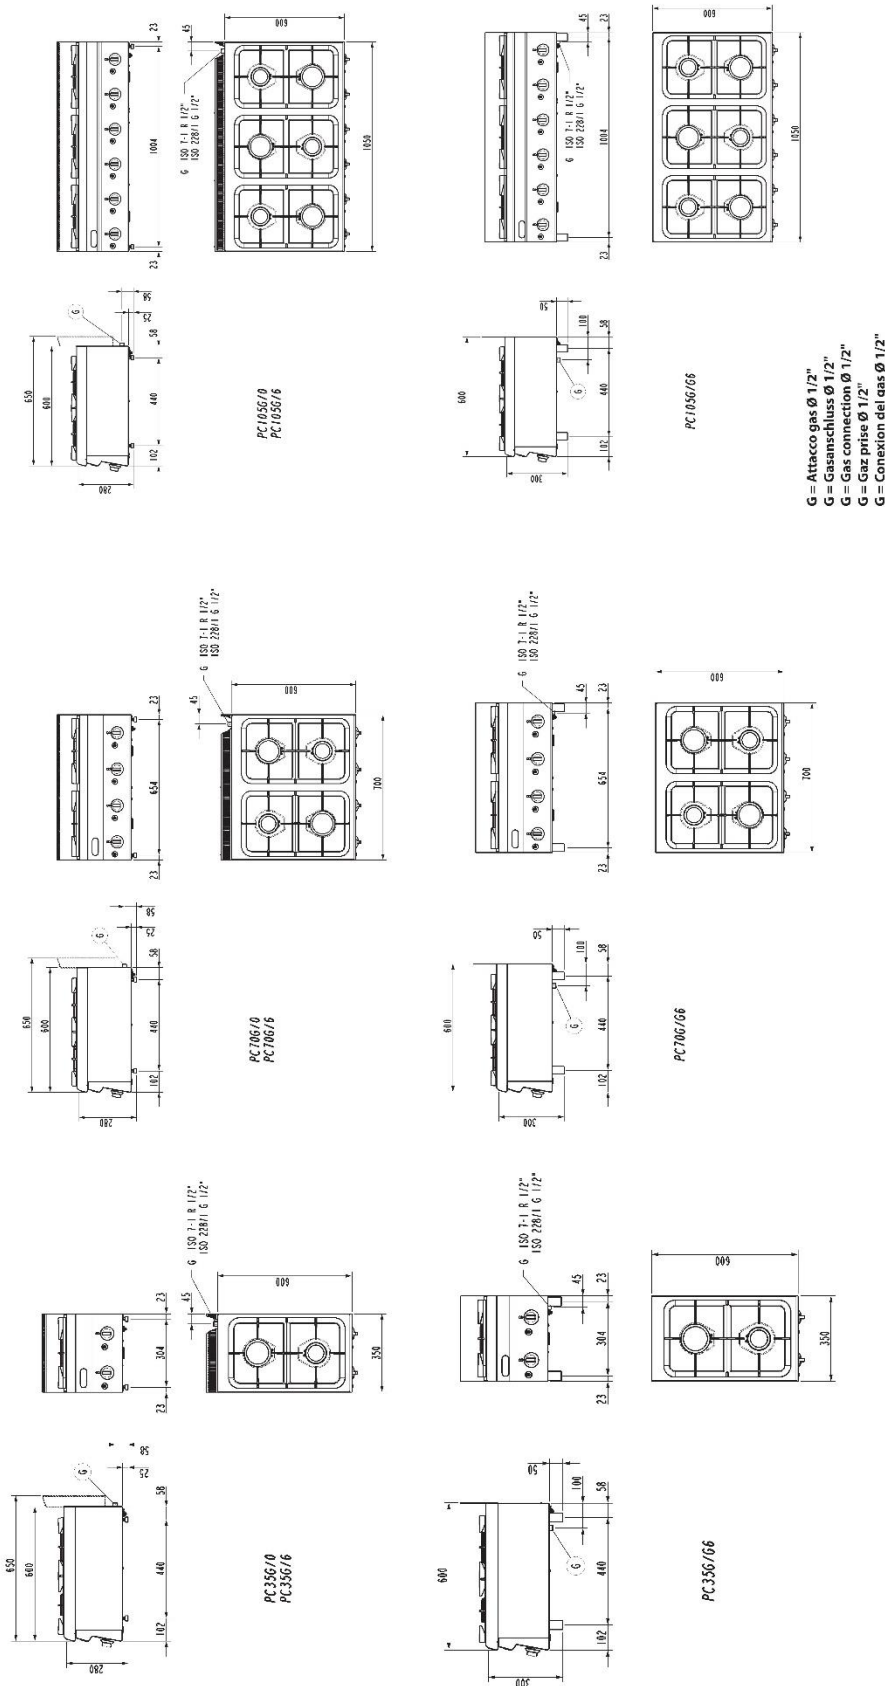


Fig.1 | Abb.1 | pvc.1 - 5415.674.00