

113002**PC70G/6****4-BURNER GAS BOILING (TOP VERSION)**



- 4-burner gas boiling top (70 cm top version).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Aluminium burners fixed to the worktop with a single ring (3.0 kW and 3.6 kW).
- Aluminium flame spreader with enamelled cast iron lid.
- Burner activation using a piezoelectric device.
- Safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- Plastic feet (H=51 mm).
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

TECHNICAL DATA

TOTAL POWER	13,2 kW	GAS POWER	13,2 kW
OPEN BURNER POWER	2x3 + 2x3,6 n°- kW	BOILING TOP POWER	13,2 kW
NATURAL GAS CONSUMPTION	1,39 m³/h	NUMBER OF BURNERS	n° 4
BOILING PAN SUPPORT	RAAF enamelled cast iron	CE GAS CERTIFICATE NUMBER	CE-0085AQ1145
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	0 mm
GAS CONNECTION HEIGHT (X)	655 mm	GAS CONNECTION HEIGHT (Y)	-100 mm
FOOT HEIGHT	51 mm	WIDTH	70 cm
DEPTH	60 cm	HEIGHT	30 cm
PACKAGE WIDTH	76,0 cm	PACKAGE DEPTH	71,0 cm
PACKAGE HEIGHT	53,0 cm	NET WEIGHT	21,5000 kg
GROSS WEIGHT	27 kg	VOLUME	0,2900 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	1.04 m³/h
LATENT HEAT RELEASE	1584.0 W	SENSIBLE HEAT RELEASE	3960.0 W
STEAM RELEASE	2323.2 g/h		

ACCESSORIES

120585	JOINT FOR TECNO60, TECNO65
120655	PAN SUPPORT REDUCER
120666	TECNO60 SPLASHBACK L=700MM

INSTALLATION SCHEMES

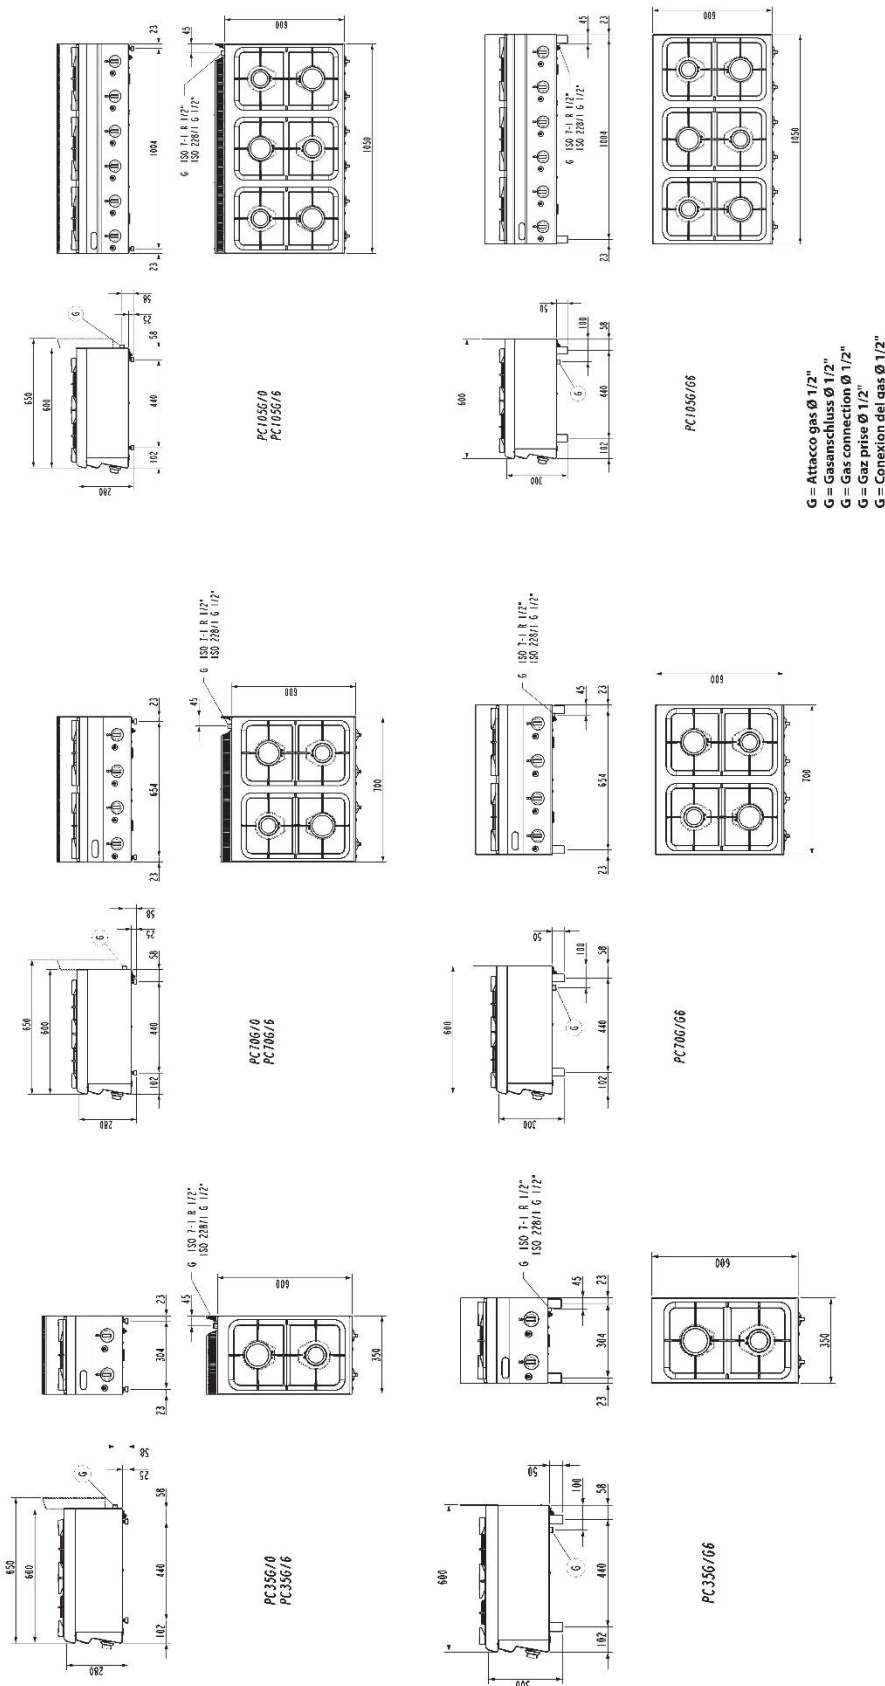


Fig.1 | Abb.1 | pvc.1 - 5415.674.00