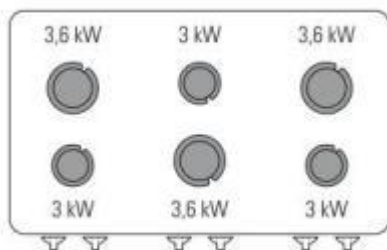

113003**PC105G/6****6-BURNER GAS BOILING (TOP VERSION)**



- 6-burner gas boiling top (105 cm top version).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Aluminium burners fixed to the worktop with a single ring (3.0 kW and 3.6 kW).
- Aluminium flame spreader with enamelled cast iron lid.
- Burner activation using a piezoelectric device.
- Safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- Plastic feet (H=51 mm).
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.



TECHNICAL DATA

TOTAL POWER	19,8 kW	GAS POWER	19,8 kW
OPEN BURNER POWER	3x3 + 3x3,6 n°- kW	BOILING TOP POWER	19,8 kW
NATURAL GAS CONSUMPTION	2,09 m³/h	NUMBER OF BURNERS	n° 6
BOILING PAN SUPPORT	RAAF enamelled cast iron	CE GAS CERTIFICATE NUMBER	CE-0085AQ1145
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	0 mm
GAS CONNECTION HEIGHT (X)	1005 mm	GAS CONNECTION HEIGHT (Y)	-100 mm
FOOT HEIGHT	51 mm	IPX RATING	4
WIDTH	105 cm	DEPTH	60 cm
HEIGHT	30 cm	PACKAGE WIDTH	111,0 cm
PACKAGE DEPTH	71,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	29,5000 kg	GROSS WEIGHT	40,0000 kg
VOLUME	0,4200 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	1.56 m³/h	LATENT HEAT RELEASE	2376.0 W
SENSIBLE HEAT RELEASE	5940.0 W	STEAM RELEASE	3484.8 g/h

ACCESSORIES

120585	JOINT FOR TECNO60, TECNO65
120655	PAN SUPPORT REDUCER
120667	BACK SPLASH GUARD L=1050MM

INSTALLATION SCHEMES

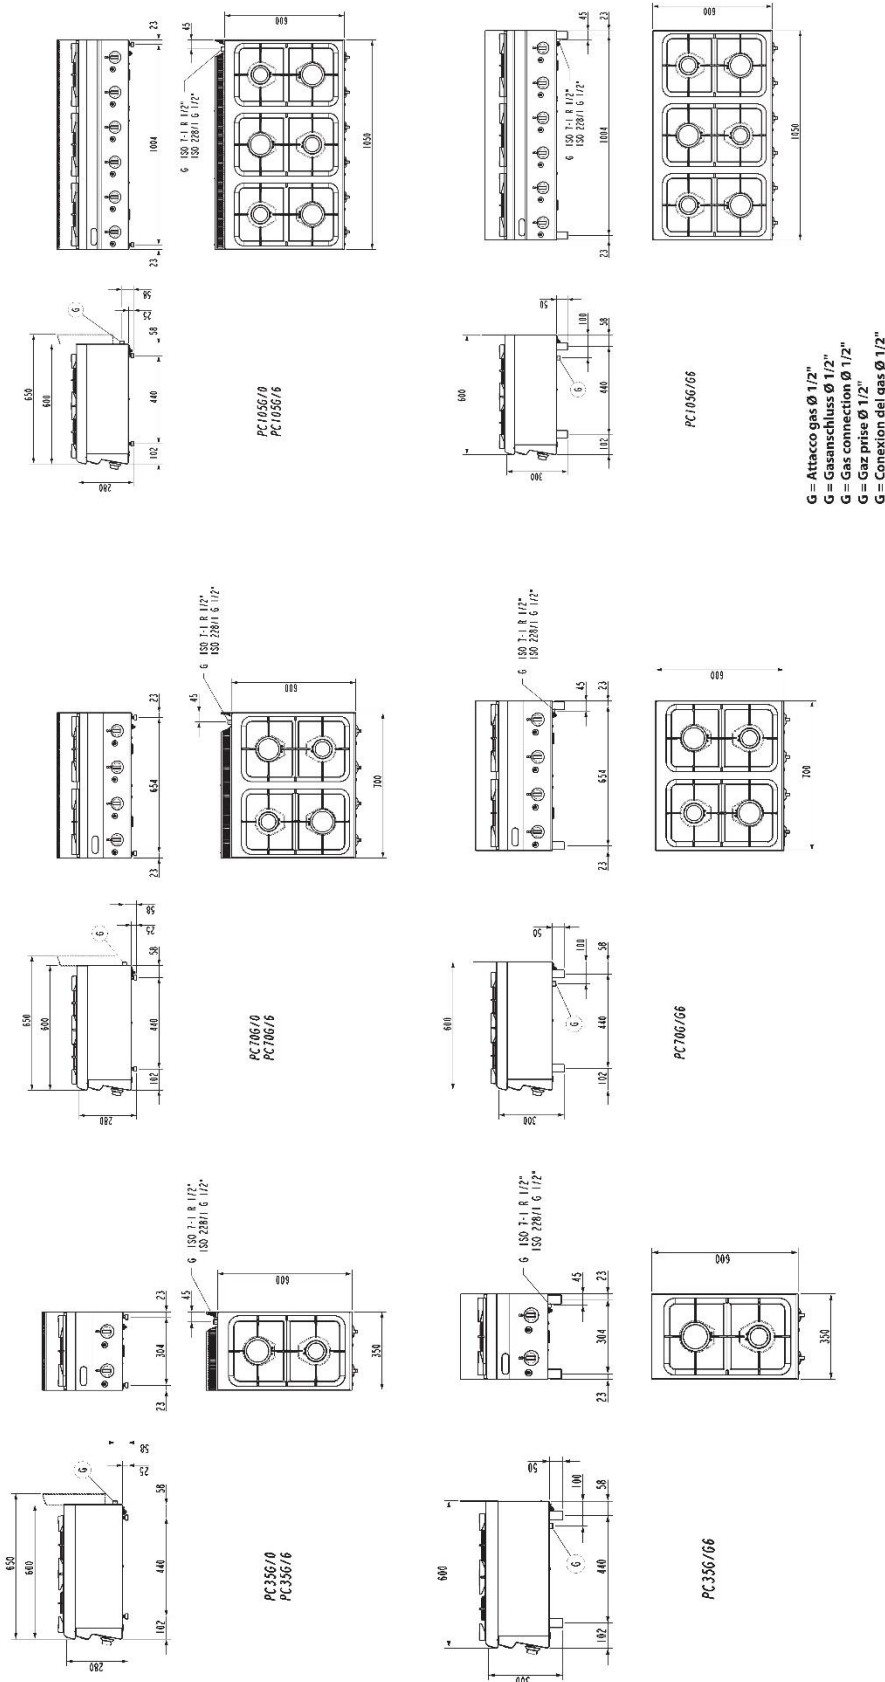


Fig.1 | Abb.1 | pvc.1 - 5415.674.00