
113027**FR35G/G6****SINGLE TANK 8L GAS FRYER WITH IN-TANK HEAT EXCHANGERS - BASKETS AND LIDS INCLUDED**



- Gas fryer (35 cm, 8 l top version).
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- AISI 304 deep drawn tank with rounded corners seamlessly welded to an AISI 304 deep drawn worktop, Scotch Brite finish.
- Worktop with front area for oil and foam expansion.
- Rounded internal profile of the tank to facilitate cleaning, complying with hygiene standards.
- Piezoelectric ignition.
- Pilot burner and safety thermocouple.
- AISI 304 stainless steel round heat exchangers in the tank.
- Operating thermostatic valve with 7 adjustment levels. The valve's excellent reactivity prevents the oil temperature from dropping, ensuring a dry and crispy product on the outside and soft on the inside.
- Max. Temperature 190°C below oil smoke point.
- Bulb thermostats immersed in oil are more efficient in sensing the temperature inside the tank, promptly adjusting the oil to the desired temperature, minimising smoke points, and prolonging the oil life.
- Front drain with elbow extension included.
- Basket support on flue.
- Lid and basket included for each tank.
- Plastic feet (H=51 mm).
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.


TECHNICAL DATA

TOTAL POWER	6,25 kW	GAS POWER	6,25 kW
TANK CAPACITY	8lt	NATURAL GAS CONSUMPTION	0,66 m ³ /h
TANK DIMENSIONS	22,5x34x22,5 cm	HEATING	Heat exchangers in the tank
TANK TYPE	AISI 304	TANKS	n° 1
CE GAS CERTIFICATE NUMBER	CE-0085BO0095	ELECTRICAL CONNECTION HEIGHT (H)	0 mm
ELECTRICAL CONNECTION HEIGHT (X)	305 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-100 mm
GAS CONNECTION DIAMETER	1/2" G EN10226-1	FOOT HEIGHT	51 mm
WIDTH	35 cm	DEPTH	60 cm
HEIGHT	30 cm	PACKAGE WIDTH	71,0 cm
PACKAGE DEPTH	41,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	19,0000 kg	GROSS WEIGHT	24,0000 kg
VOLUME	0,1500 m ³	HARMONISED CODE	84198180
LPG CONSUMPTION	0.49 m ³ /h	LATENT HEAT RELEASE	4375.0 W
SENSIBLE HEAT RELEASE	562.5 W	STEAM RELEASE	6437.5 g/h

ACCESSORIES

- 120575 EXTRA FRYER BASKET (8L) - DIM. CM (21X26.5X10.5H)
- 120585 JOINT FOR TECNO60, TECNO65
- 120690 2 EXTRA FRYER BASKETS (8L) - DIM. CM (10.5X26.5X10.5H)

INSTALLATION SCHEMES

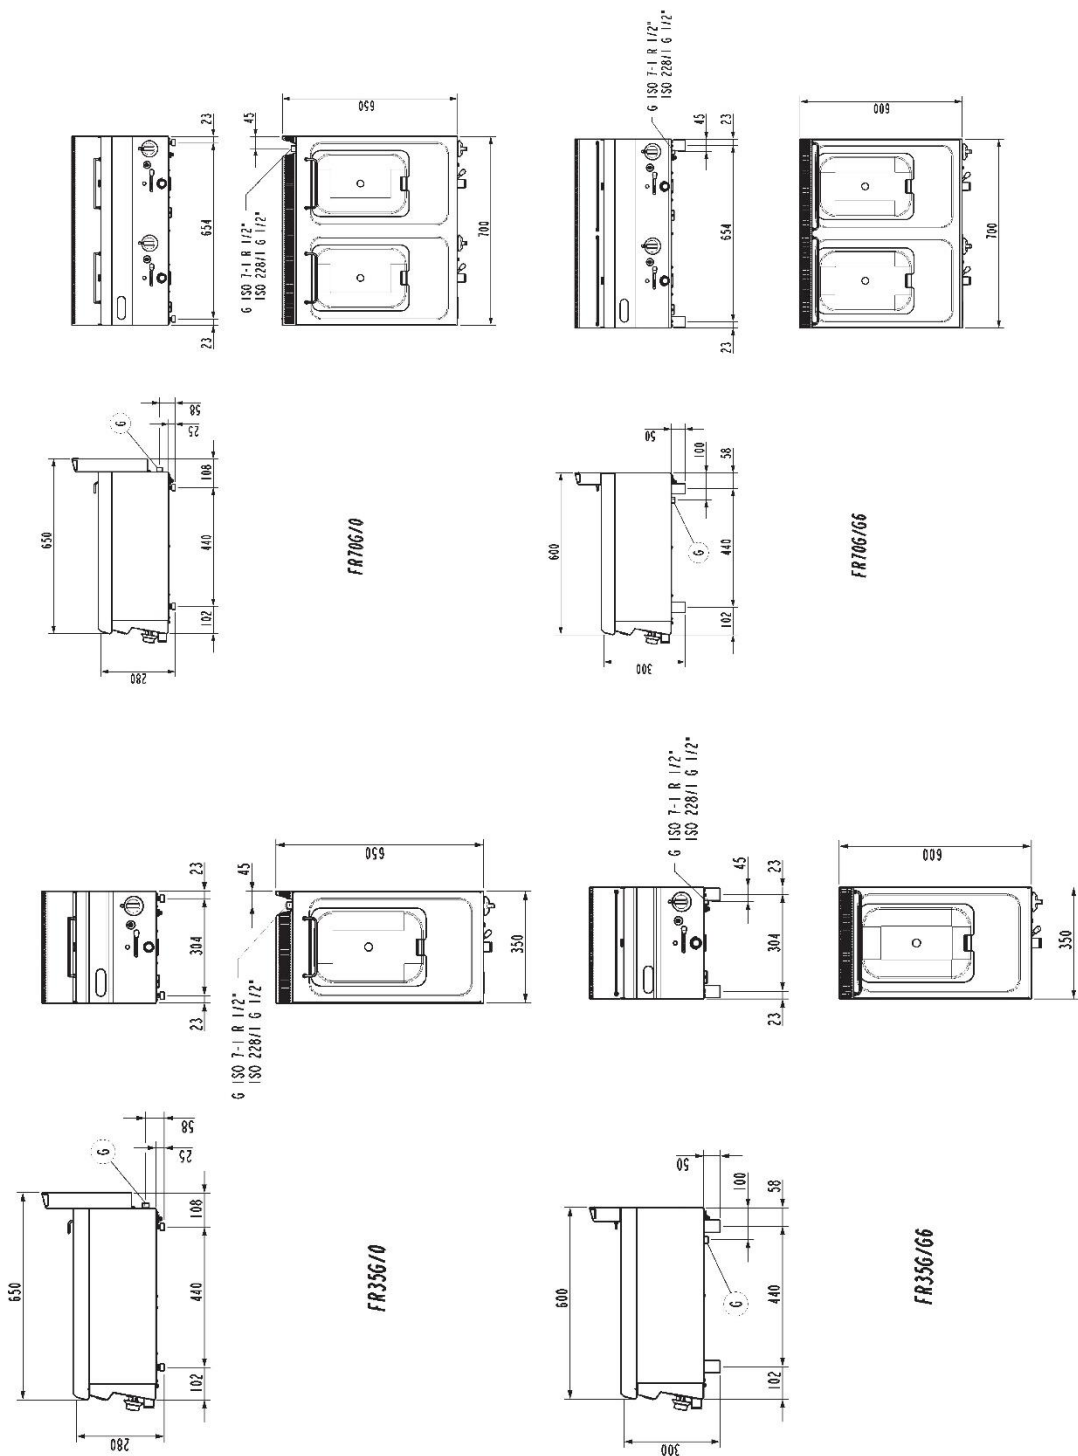

G (1/2" ISO 228-1 - G 1/2" EN 10226-1) = Attacco gas | Gas inlet connection | Gasanschluss | Подсоединение газ | Arrivie gaz | Entrada gas.

Fig.1 | Abb.1 | рис.1 - 5415.682.00