
116040

BM35E/6/0

GN1/1 ELECTRIC BAIN-MARIE (TOP VERSION)



- Electric bain-marie GN1/1, (35 cm top version).
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- Bain-marie maintains food temperature and melts delicate solid food, such as chocolate, butter, and lard.
- AISI 304 stainless steel deep drawn tank with rounded corners sealed to the AISI 304 stainless steel top with Scotch Brite finish.
- Heating through stainless steel Incoloy armoured heating elements outside the tank.
- Thermostatic control 0-30-60-90°C.
- Safety thermostat to protect the tank against ignition without water or excessive evaporation.
- Manual water filling.
- Front drain with elbow extension included.
- Plastic feet (H=51 mm).


TECHNICAL DATA

TOTAL POWER	1,3 kW	ELECTRIC POWER	1,3 kW
FREQUENCY	50/60 Hz	VOLTAGE	230 ~ V
TEMPERATURE RANGE	0÷90 °C	TANK CAPACITY	GN1/1
TANK DIMENSIONS	30,5x51x16,5 cm	MINIMUM POWER CABLE CROSS-SECTION	3 x 1,5 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	TANK TYPE	AISI 304
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	297 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-445 mm	FOOT HEIGHT	51 mm
IPX RATING	4	WIDTH	35 cm
DEPTH	60 cm	HEIGHT	30 cm
PACKAGE WIDTH	71,0 cm	PACKAGE DEPTH	41,0 cm
PACKAGE HEIGHT	53,0 cm	NET WEIGHT	11,0000 kg
GROSS WEIGHT	16,0000 kg	VOLUME	0,1500 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	260.0 W
SENSIBLE HEAT RELEASE	162.5 W	STEAM RELEASE	382.2 g/h

ACCESSORIES

120580	BAIN-MARIE FALSE BOTTOM (GN1/1)
120585	JOINT FOR TECNO60, TECNO65
120650	LID (GN1/1)
120665	TECNO60 SPLASHBACK L=350MM

INSTALLATION SCHEMES

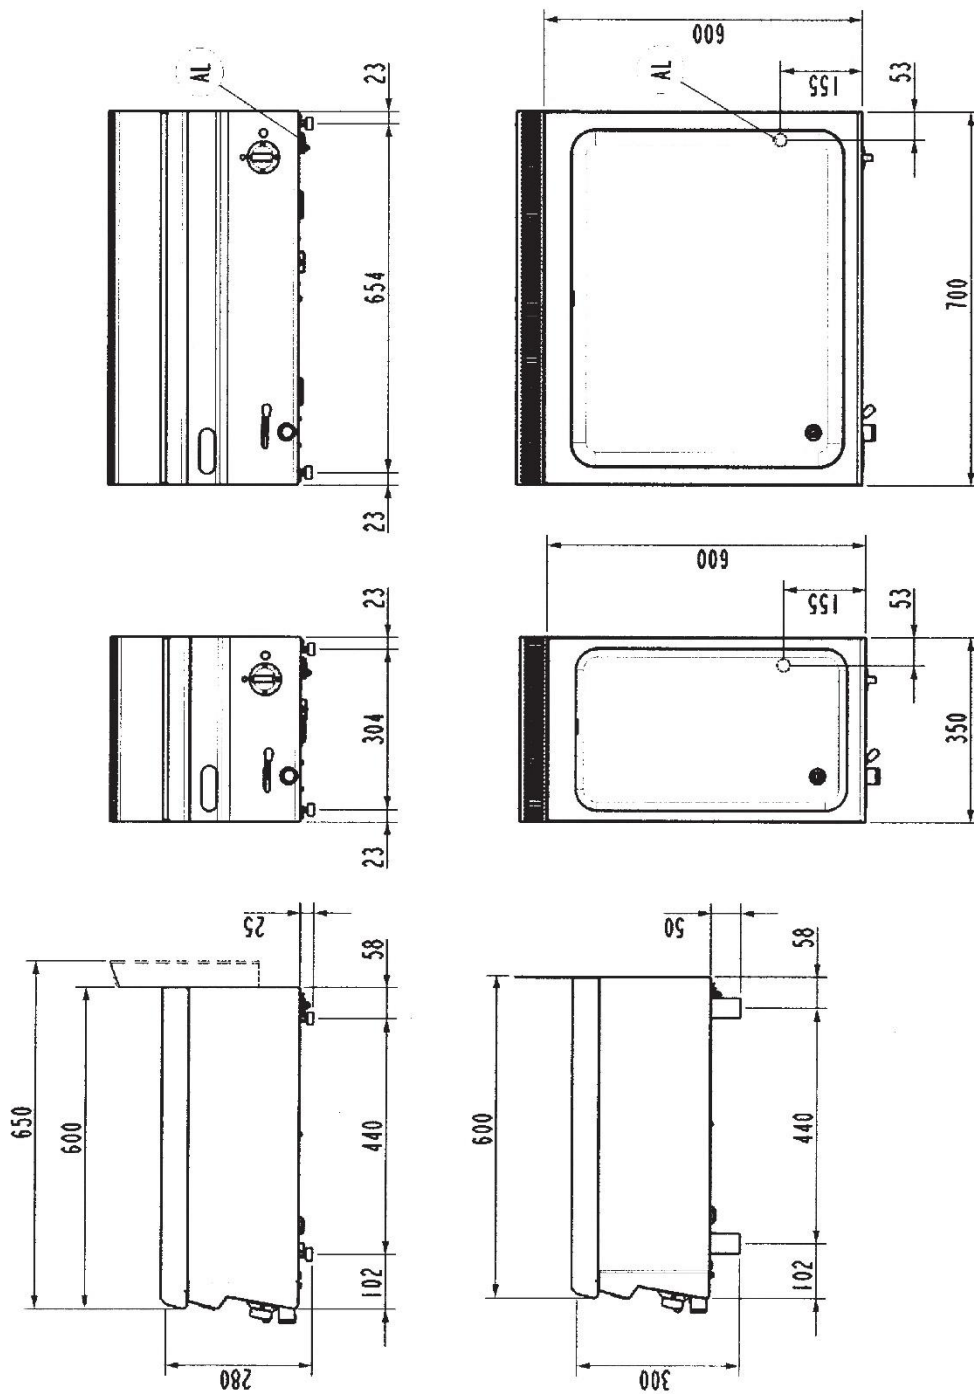

Al = Entrata cavo elettrico | Power supply cable inlet | Netzkabeleingang | Вход электропровода | Entrada cable eléctrico.

Fig.1 | Abb.1 | рис.1 - 5415.685.00