

---

**116041****BM70E/6/0****GN2/1 ELECTRIC BAIN-MARIE (TOP VERSION)**

---



- Electric bain-marie GN2/1, (70 cm top version).
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- Bain-marie maintains food temperature and melts delicate solid food, such as chocolate, butter, and lard.
- AISI 304 stainless steel deep drawn tank with rounded corners sealed to the AISI 304 stainless steel top with Scotch Brite finish.
- Heating through stainless steel Incoloy armoured heating elements outside the tank.
- Thermostatic control 0-30-60-90°C.
- Safety thermostat to protect the tank against ignition without water or excessive evaporation.
- Manual water filling.
- Front drain with elbow extension included.
- Plastic feet (H=51 mm).


## TECHNICAL DATA

TOTAL POWER	2,6 kW	ELECTRIC POWER	2,6 kW
FREQUENCY	50/60 Hz	VOLTAGE	230 ~ V
TEMPERATURE RANGE	0÷90 °C	TANK CAPACITY	GN2/1
TANK DIMENSIONS	63x51x16,5 cm	MINIMUM POWER CABLE CROSS-SECTION	3 x 1,5 n° - mm <sup>2</sup>
ELECTRIC CABLE TYPE	H07 RN-F	TANK TYPE	AISI 304
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	647 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-445 mm	FOOT HEIGHT	51 mm
IPX RATING	4	WIDTH	70 cm
DEPTH	60 cm	HEIGHT	30 cm
PACKAGE WIDTH	76,0 cm	PACKAGE DEPTH	71,0 cm
PACKAGE HEIGHT	53,0 cm	NET WEIGHT	15,9 kg
GROSS WEIGHT	23,4 kg	VOLUME	0,2900 m <sup>3</sup>
HARMONISED CODE	84198180	LATENT HEAT RELEASE	520.0 W
SENSIBLE HEAT RELEASE	325.0 W	STEAM RELEASE	764.4 g/h

## ACCESSORIES

120585 JOINT FOR TECNO60, TECNO65  
 120666 TECNO60 SPLASHBACK L=700MM

INSTALLATION SCHEMES

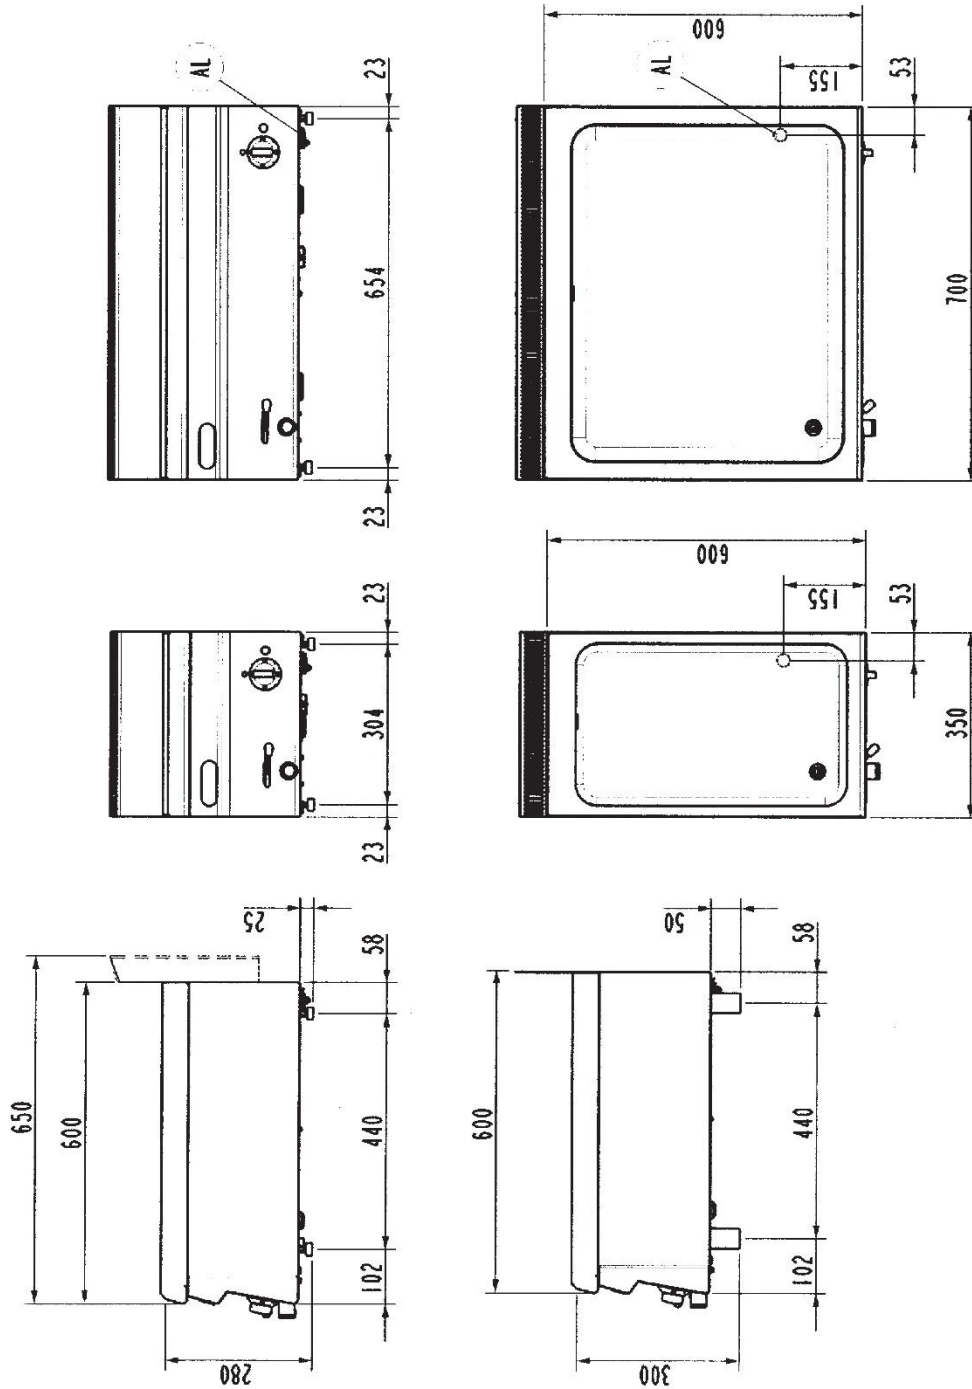

Al = Entrata cavo elettrico | Power supply cable inlet | Netzkabeleingang | Вход электропровода | Entrada cable eléctrico.

Fig.1 | Abb.1 | рис.1 - 5415.685.00