

---

**123037**

PCA70G/0

**4-BURNER GAS BOILING TOP (TOP VERSION)**

---



- 4-burner gas boiling top (70 cm top version).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Cast-iron enamelled burners fixed to the worktop with a single ring (3.3 kW and 5.2 kW).
- Brass flame spreader.
- Burner activation using a piezoelectric device.
- Safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- Height-adjustable rubberised plastic feet (15-25 mm)
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

---

**TECHNICAL DATA**

|                           |                    |                           |                          |
|---------------------------|--------------------|---------------------------|--------------------------|
| TOTAL POWER               | 17 kW              | GAS POWER                 | 17 kW                    |
| OPEN BURNER POWER         | 2X3,3+2X5,2 n°- kW | BOILING TOP POWER         | 17 kW                    |
| NUMBER OF BURNERS         | n° 4               | BOILING PAN SUPPORT       | RAAF enamelled cast iron |
| CE GAS CERTIFICATE NUMBER | CE-0085AQ1145      | GAS CONNECTION DIAMETER   | 1/2"G EN10226-1          |
| GAS CONNECTION HEIGHT (H) | 25 mm              | GAS CONNECTION HEIGHT (X) | 655 mm                   |
| GAS CONNECTION HEIGHT (Y) | -50 mm             | FOOT HEIGHT               | 25 mm                    |
| FOOT ADJUSTMENT           | 25/35 mm           | WIDTH                     | 70 cm                    |
| DEPTH                     | 65 cm              | HEIGHT                    | 28 cm                    |
| PACKAGE WIDTH             | 75 cm              | PACKAGE DEPTH             | 70 cm                    |
| PACKAGE HEIGHT            | 53 cm              | NET WEIGHT                | 23,9 kg                  |
| GROSS WEIGHT              | 31,4 kg            | VOLUME                    | 0,29 m <sup>3</sup>      |
| HARMONISED CODE           | 84198180           | LPG CONSUMPTION           | 1.34 m <sup>3</sup> /h   |
| LATENT HEAT RELEASE       | 2040.0 W           | SENSIBLE HEAT RELEASE     | 5100.0 W                 |
| STEAM RELEASE             | 2992.0 g/h         |                           |                          |

---

**ACCESSORIES**

120585 JOINT FOR TECNO60, TECNO65  
120655 PAN SUPPORT REDUCER

INSTALLATION SCHEMES

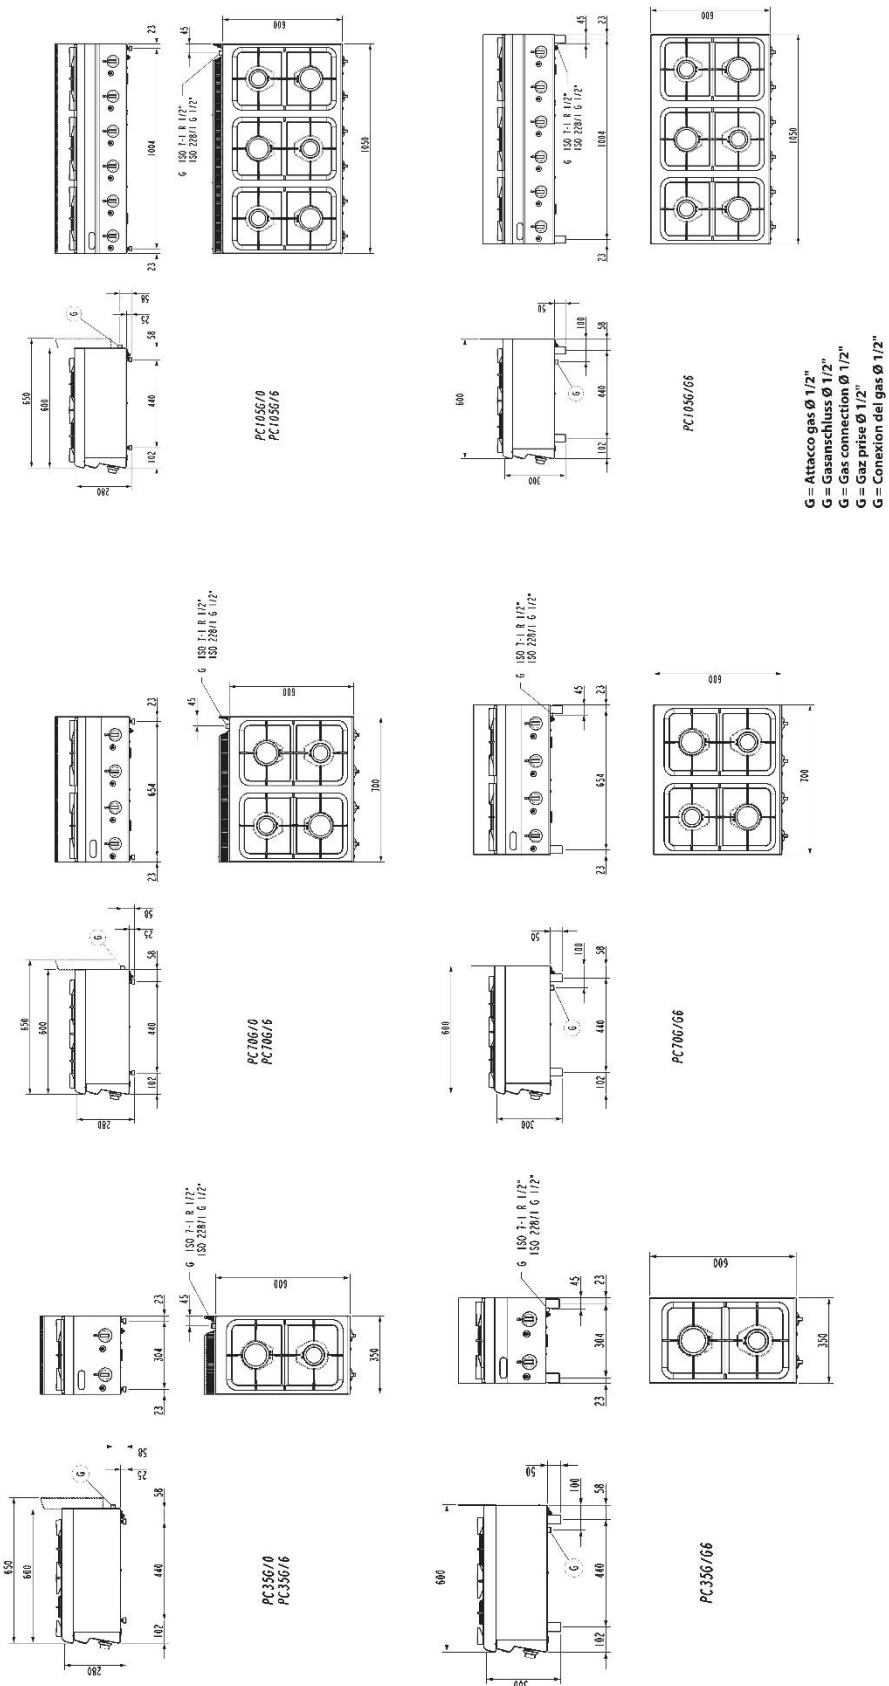


Fig.1 | Abb.1 | pvc.1 - 5415.674.00