

123041

PFA05G/0

## 6-BURNER GAS COOKER ON ELECTRIC CONVECTION OVEN WITH 1 GRID AND 1 TRAY



- 6-burner gas cooker on an electric convection oven (70 cm) and a cabinet with a door (35 cm).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Cast-iron enamelled burners fixed to the worktop with a single ring (3.3 kW and 5.2 kW).
- Brass flame spreader.
- Burner activation using a piezoelectric device.
- Safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

### >> ELECTRIC CONVECTION OVEN

- >> Enamelled cooking chamber (45x39.5x33.5 cm).
- >> Oven door with 2 tempered glass panes. Heat-reflecting inner glass.
- >> Removable silicone gasket.
- >> Heating via fan with heating element.
- >> Thermostatic control 0-275°C.
- >> 4 trays 440x365 mm.
- >> Timer 0-50 minutes.
- >> 1 grid and 1 tray included.
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

## TECHNICAL DATA

TOTAL POWER	25,5 + 2,5 kW	GAS POWER	25,5 kW
ELECTRIC POWER	2,5 kW	FREQUENCY	50/60 Hz
VOLTAGE	230 ~ V	OVEN POWER	2,5 kW
OPEN BURNER POWER	3X3,3+3X5,2 n°- kW	BOILING TOP POWER	25,5 kW
TRAY CAPACITY	n° 4x(440x380)	COOKING CHAMBER DIMENSIONS	46x41,5x32 cm
CABINET DIMENSIONS	36,5x57x42 cm	GUIDES	n° 4
NUMBER OF BURNERS	n° 6	VERTICAL DISTANCE BETWEEN TRAYS	1x8 + 2x5 cm
OVEN TEMPERATURE RANGE	0÷275 °C	MINIMUM POWER CABLE CROSS-SECTION	3 x 1,5 n° - mm <sup>2</sup>
BOILING PAN SUPPORT	RAAF enamelled cast iron	TIMER	0-50 min
ELECTRIC CABLE TYPE	H07 RN-F	OVEN TYPE	Convection
CE GAS CERTIFICATE NUMBER	CE-0085AQ1145	GAS CONNECTION DIAMETER	1/2"G EN10226-1
IPX RATING	4	WIDTH	105 cm
DEPTH	65 cm	HEIGHT	85 cm
PACKAGE WIDTH	111 cm	PACKAGE DEPTH	75 cm
PACKAGE HEIGHT	118 cm	NET WEIGHT	80 kg
GROSS WEIGHT	97,6 kg	VOLUME	0,97 m <sup>3</sup>
HARMONISED CODE	84198180	LPG CONSUMPTION	2.01 m <sup>3</sup> /h
LATENT HEAT RELEASE	3060.0 W	SENSIBLE HEAT RELEASE	7650.0 W
STEAM RELEASE	4488.0 g/h		

## ACCESSORIES

120585 JOINT FOR TECNO60, TECNO65  
 120655 PAN SUPPORT REDUCER

INSTALLATION SCHEMES

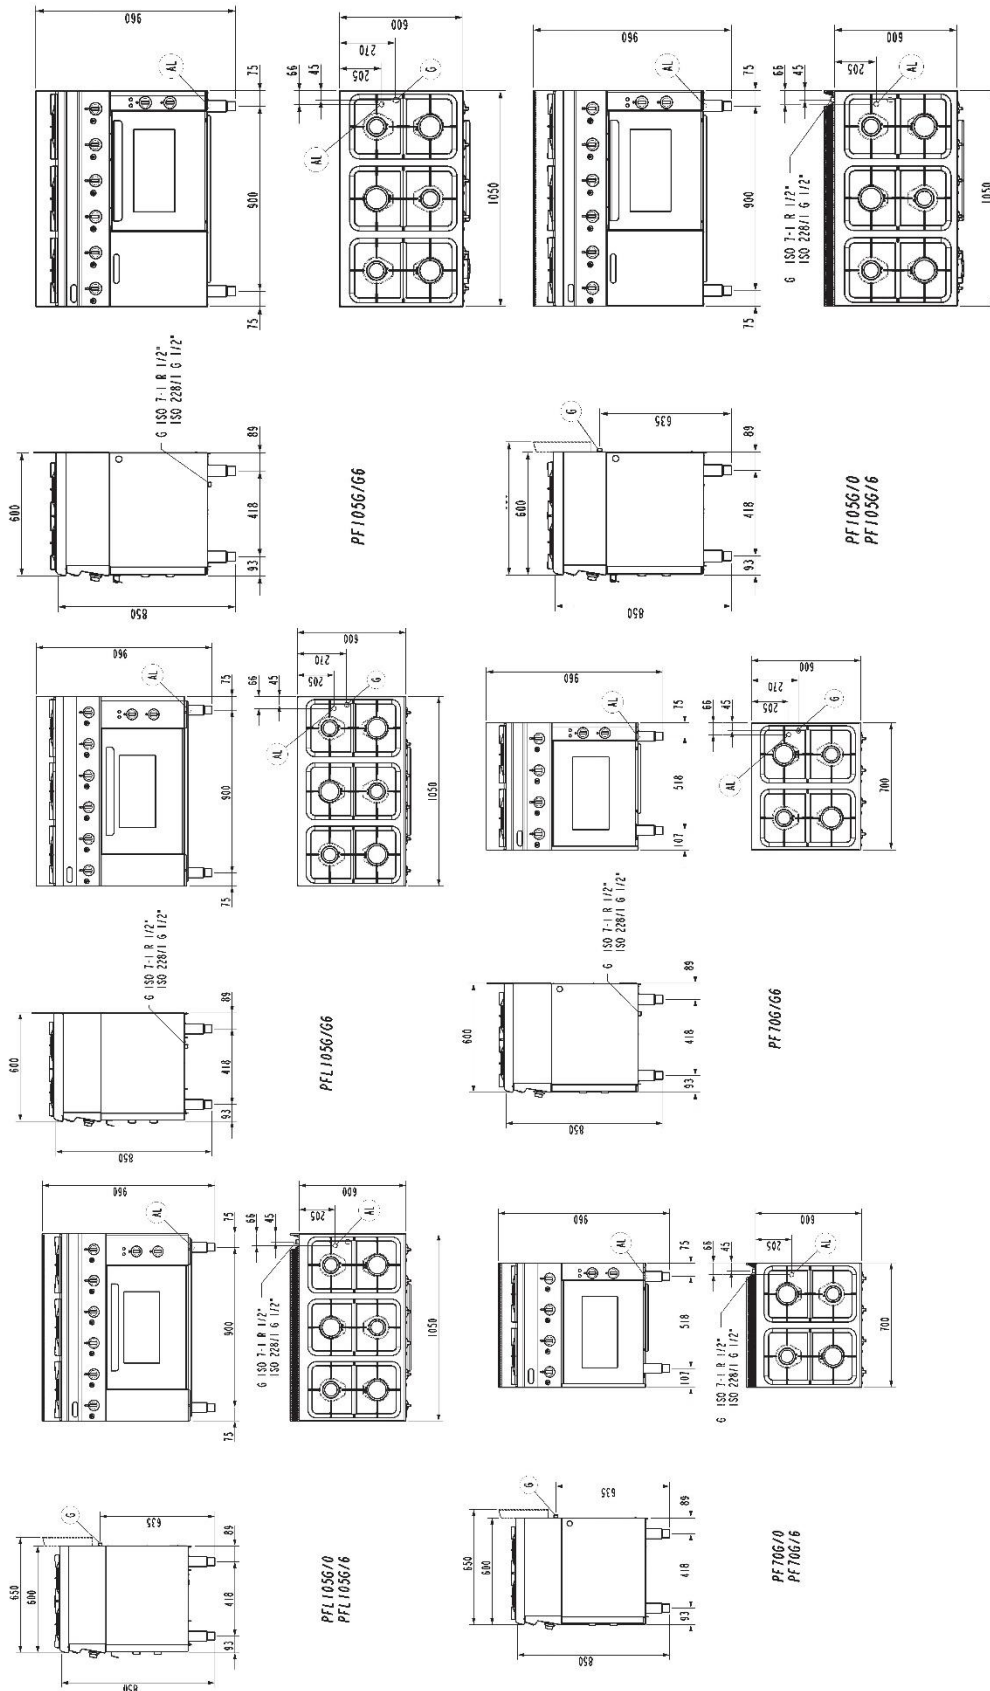


Fig.1 | Abb.1 | pvc.1 - 5415.671.00