

126008

PF70E/0


## ELECTRIC COOKER WITH 4 HERMETIC ROUND HOT PLATES (DIAM 18 CM - 7.1 IN) ON ELECTRIC CONVECTION OVEN WITH 1 GRID AND 1 TRAY



- Electric cooker (70 cm) with 4 round cast-iron plates (18 cm diameter) on an electric convection oven.
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Cast iron electric plates hermetically fixed to the deep drawn worktop.
- 2.0 kW power for each plate adjustable to 6 levels.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are ignited.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

### >> ELECTRIC CONVECTION OVEN

- >> Enamelled cooking chamber (45x39.5x33.5 cm).
- >> Oven door with 2 tempered glass panes. Heat-reflecting inner glass.
- >> Removable silicone gasket.
- >> Heating via fan with heating element.
- >> Thermostatic control 0-275°C.
- >> 4 trays 440x365 mm.
- >> Timer 0-50 minutes.
- >> 1 grid and 1 tray included.
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.



## TECHNICAL DATA

TOTAL POWER	10,5 kW	ELECTRIC POWER	10,5 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
OVEN POWER	2,5 kW	BOILING TOP POWER	8 kW
COOKING ZONE POWER	4x2 n°- kW	TRAY CAPACITY	n° 4x(440x380)
COOKING CHAMBER DIMENSIONS	46x41,5x32 cm	ELECTRIC PLATE DIMENSIONS	Ø 18 cm
GUIDES	n° 4	NUMBER OF COOKING ZONES	n° 4
VERTICAL DISTANCE BETWEEN TRAYS	1x8 + 2x5 cm	OVEN TEMPERATURE RANGE	0÷275 °C
MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm <sup>2</sup>	TIMER	0-50 min
ELECTRIC CABLE TYPE	H07 RN-F	OVEN TYPE	Convection
IPX RATING	4	WIDTH	70 cm
DEPTH	65 cm	HEIGHT	85 cm
PACKAGE WIDTH	76 cm	PACKAGE DEPTH	75 cm
PACKAGE HEIGHT	117 cm	NET WEIGHT	50 kg
GROSS WEIGHT	66 kg	VOLUME	0,66 m <sup>3</sup>
HARMONISED CODE	84198180	LATENT HEAT RELEASE	840.0 W
SENSIBLE HEAT RELEASE	2100.0 W	STEAM RELEASE	1239.0 g/h

## ACCESSORIES

120585 JOINT FOR TECNO60, TECNO65

INSTALLATION SCHEMES

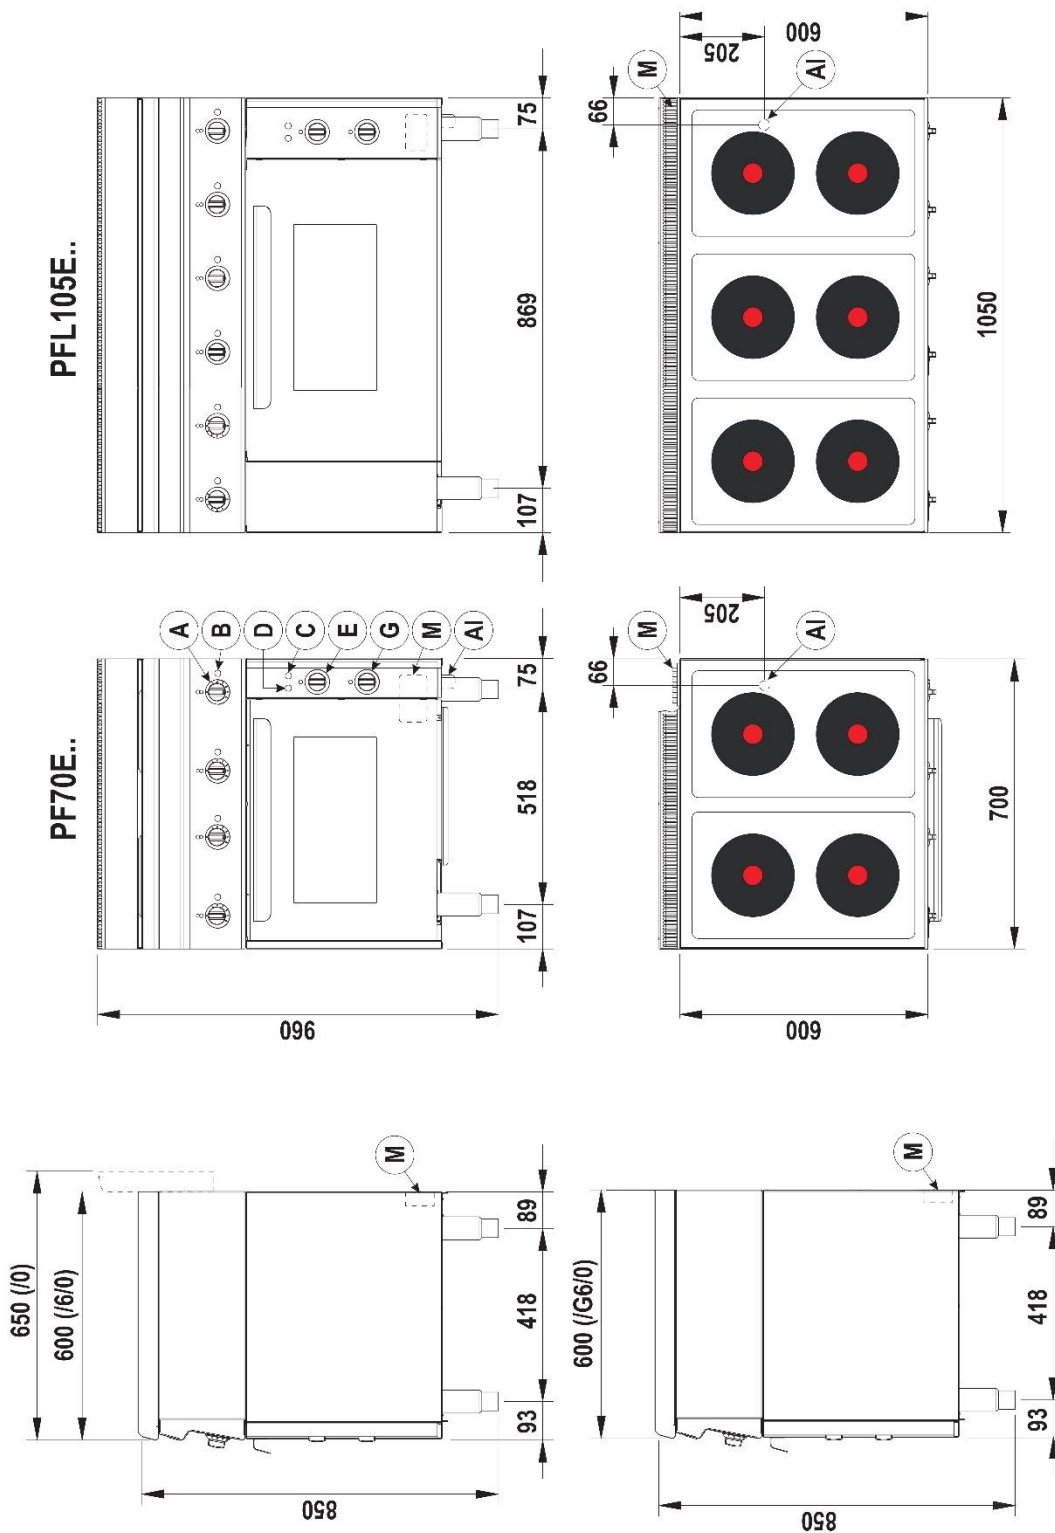


Fig.1 | Abb.1 | pvc.1 - 5415.672.00