

---

**126011****PCC35E/0****GLASS CERAMIC ELECTRIC BOILING TOP WITH 2 HEATING ZONES (TOP VERSION)**

---



- Glass ceramic electric boiling top (35 cm) with 2 independent cooking zones.
- Glass ceramic cook top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- Ultra-rapid infrared heating elements with a power of 1.8 kW in a single circuit and 2.5 kW in a dual circuit.
- Energy regulator 0-6-infinite.
- Separated heating commands and control +F3 for each area by means of a thermostat.
- Lights warning when the heating areas are active.
- Heat warning lamps on the glass to enhance operator safety.
- Height-adjustable rubberised plastic feet (15-25 mm)
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.



## TECHNICAL DATA

TOTAL POWER	4,3 kW	ELECTRIC POWER	4,3 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	4,3 kW	COOKING ZONE POWER	1x1,8 + 1x2,5 n°- kW
2-ZONE HEATING ELEMENTS	n° 1	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm <sup>2</sup>	ELECTRIC CABLE TYPE	H07 RN-F
HEATING ZONES	n° 2	IPX RATING	4
WIDTH	35 cm	DEPTH	65 cm
HEIGHT	28 cm	PACKAGE WIDTH	71,0 cm
PACKAGE DEPTH	42 cm	PACKAGE HEIGHT	54 cm
NET WEIGHT	12 kg	GROSS WEIGHT	16,5 kg
VOLUME	0,16 m <sup>3</sup>	HARMONISED CODE	84198180
LATENT HEAT RELEASE	344.0 W	SENSIBLE HEAT RELEASE	860.0 W
STEAM RELEASE	507.4 g/h		

## ACCESSORIES

120585 JOINT FOR TECNO60, TECNO65

INSTALLATION SCHEMES

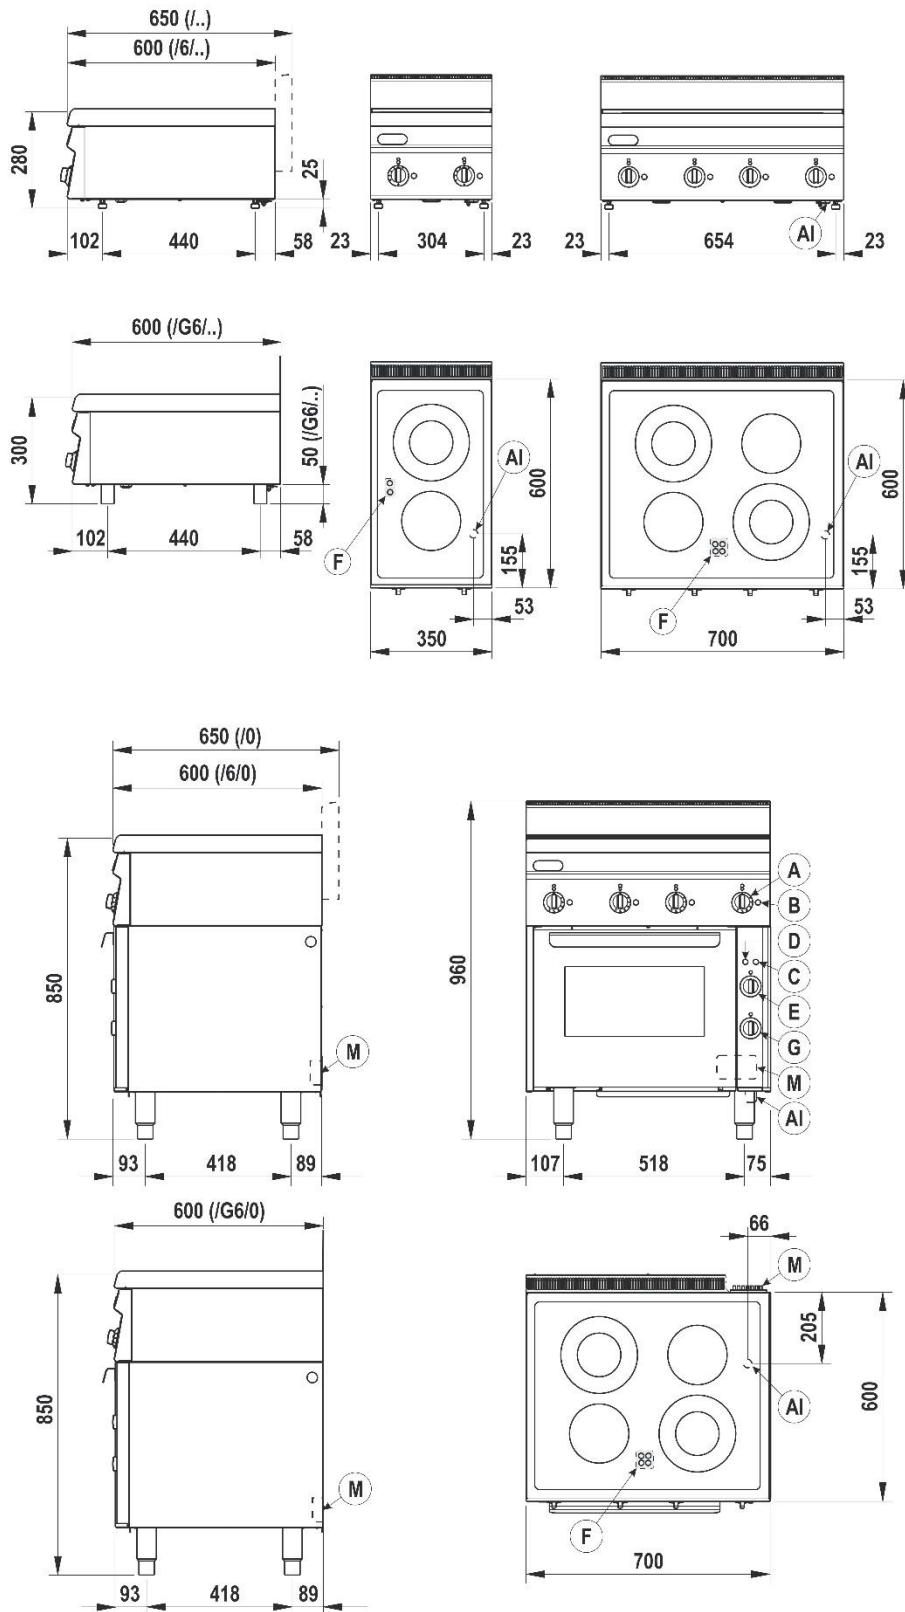


Fig.1 | Abb.1 | рис.1 - 5415.673.00