
126013

PCC70E/0

GLASS CERAMIC ELECTRIC BOILING TOP WITH 4 HEATING ZONES (TOP VERSION)



- Glass ceramic electric boiling top (70 cm top version) with 4 independent cooking zones.
- Glass ceramic cook top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- Ultra-rapid infrared heating elements with a power of 1.8 kW in a single circuit and 2.5 kW in a dual circuit.
- Energy regulator 0-6-infinite.
- Heating commands and separated controls for each area by means of a thermostat.
- Lights warning when the heating areas are active.
- Heat warning lamps on the glass to enhance operator safety.
- Height-adjustable rubberised plastic feet (15-25 mm)
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.

TECHNICAL DATA

TOTAL POWER	8,6 kW	ELECTRIC POWER	8,6 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
BOILING TOP POWER	8,6 kW	COOKING ZONE POWER	2x1,8 + 2x2,5 n°- kW
2-ZONE HEATING ELEMENTS	n° 2	NUMBER OF COOKING ZONES	n° 4
MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
HEATING ZONES	n° 4	IPX RATING	4
WIDTH	70 cm	DEPTH	65 cm
HEIGHT	28 cm	PACKAGE WIDTH	76,0 cm
PACKAGE DEPTH	71,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	47,5 kg	GROSS WEIGHT	55 kg
VOLUME	0,2900 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	688.0 W	SENSIBLE HEAT RELEASE	1720.0 W
STEAM RELEASE	1014.8 g/h		

ACCESSORIES

120585 JOINT FOR TECNO60, TECNO65

INSTALLATION SCHEMES

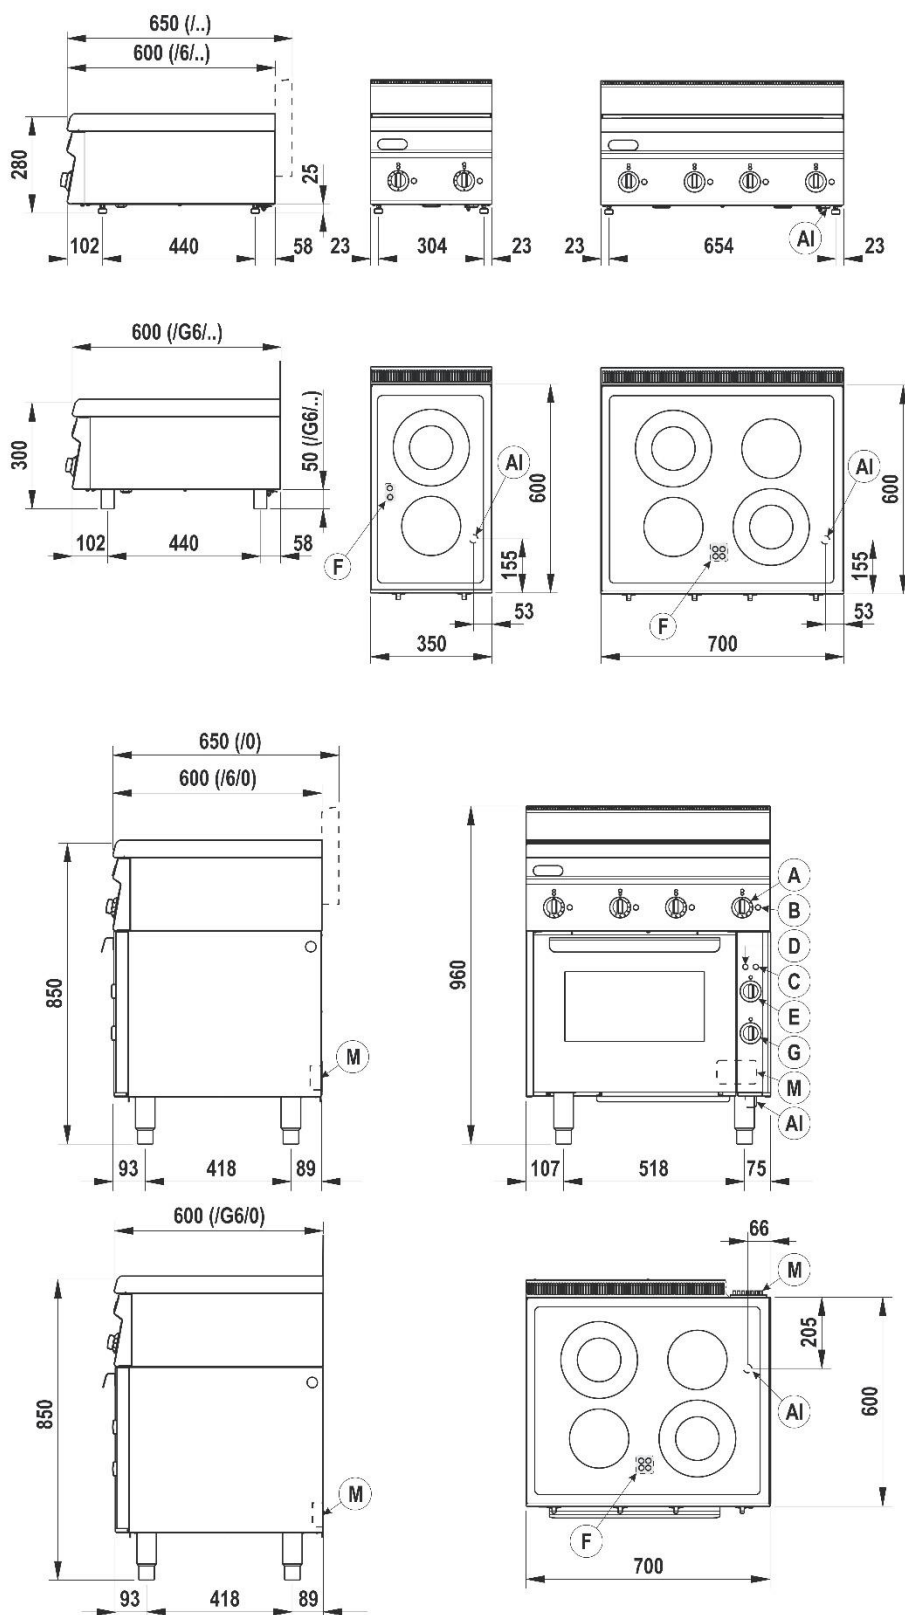


Fig.1 | Abb.1 | рис.1 - 5415.673.00