
126040

GR35E/0

ELECTRIC GRILL WITH WATER (TOP VERSION)



- Electric water grill, (35 cm top version).
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- AISI 304 worktop with Scotch Brite finish.
- AISI 304 stainless steel tank.
- Stainless steel tilting armoured heating elements.
- Energy regulator (from 1 to 6) with maximum temperature of 400°C.
- AISI 304 stainless steel grill complying with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- Safety micro switch in the raised position of the heating elements.
- Manual water filling.
- Front drain with elbow extension included.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Technical compartment to facilitate connection to the electrical network.


TECHNICAL DATA

TOTAL POWER	3 kW	ELECTRIC POWER	3 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²	COOKING SURFACE	25x40 cm
ELECTRIC CABLE TYPE	H07 RN-F	HEATING ZONES	n° 1
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	297 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-495 mm	FOOT HEIGHT	25 mm
FOOT ADJUSTMENT	25/35 mm	IPX RATING	4
WIDTH	35 cm	DEPTH	65 cm
HEIGHT	28 cm	PACKAGE WIDTH	71,0 cm
PACKAGE DEPTH	41,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	18,8000 kg	GROSS WEIGHT	23,8000 kg
VOLUME	0,1500 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	525.0 W	SENSIBLE HEAT RELEASE	2400.0 W
STEAM RELEASE	771.0 g/h		

ACCESSORIES

120585 JOINT FOR TECNO60, TECNO65

INSTALLATION SCHEMES

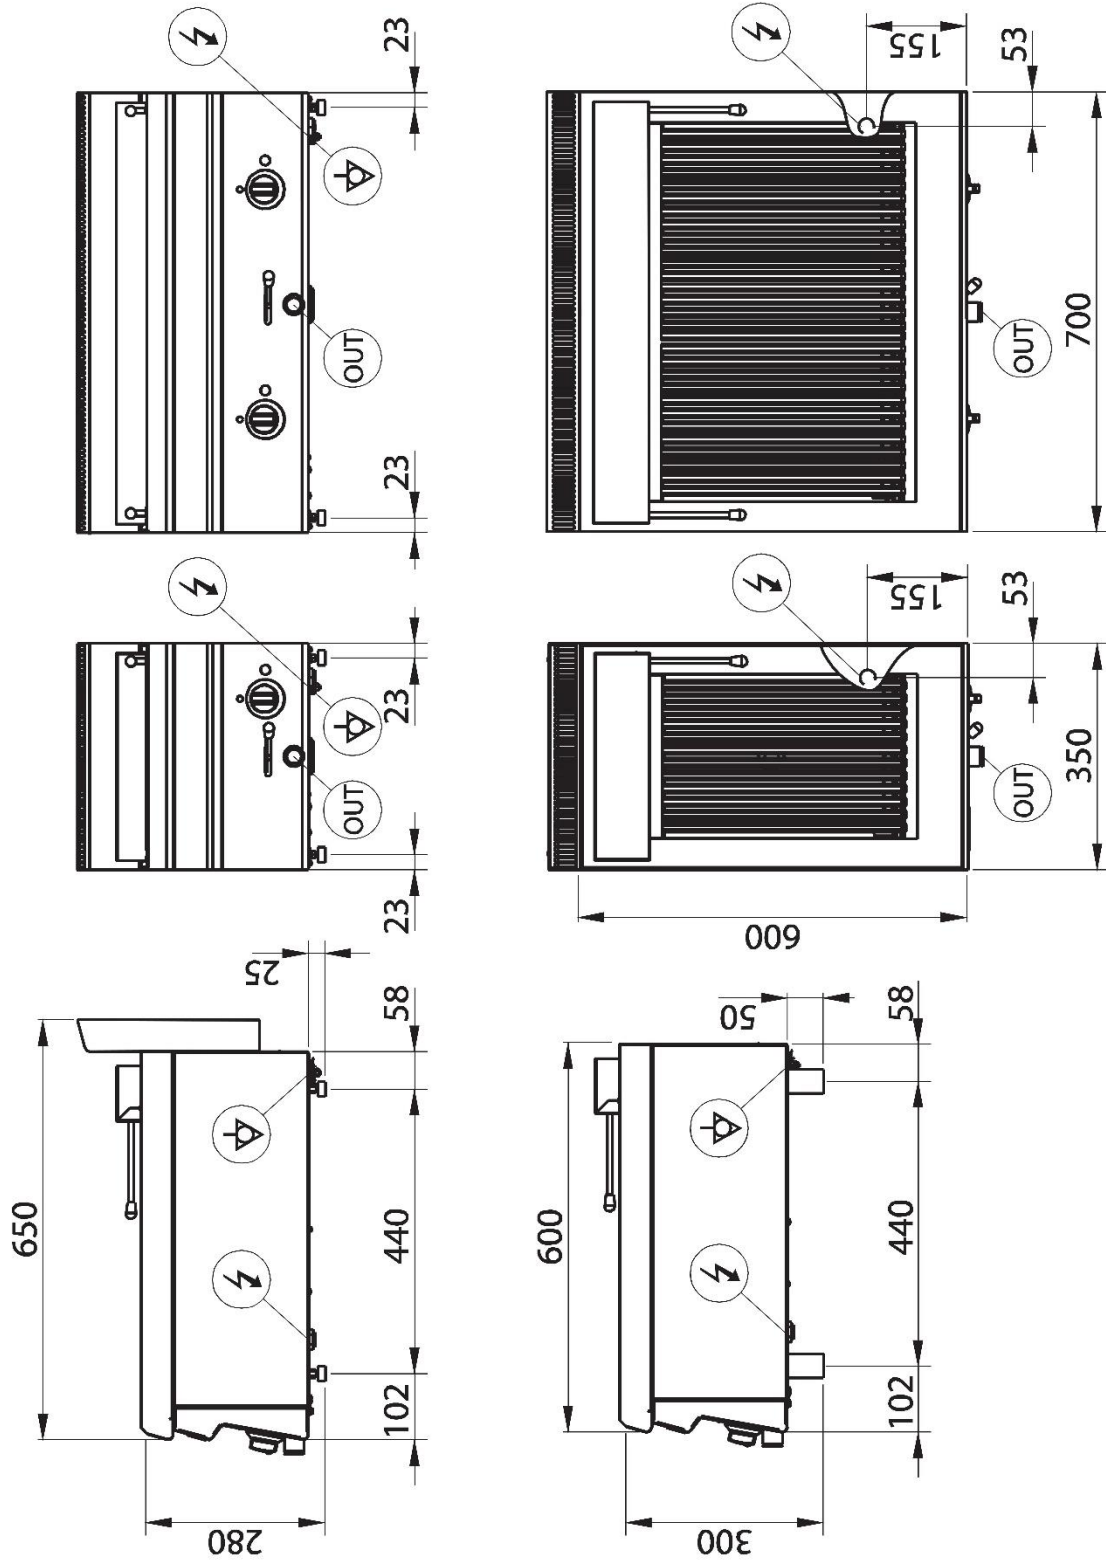

AI = Entrata cavo elettrico | Power supply cable inlet | Netzkabelingang | Вход электропровода | Entrée câble électrique | Entrada cable eléctrico.

Fig.1 | Abb.1 | pvc.1 - 5415.687.00