


313037

P2FG16GG9

8-BURNER GAS COOKER ON GN2/1 2 GAS STATIC OVENS WITH 2 GRIDS

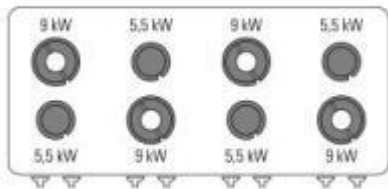

- 8-burner gas cooker on 2 GN 2/1 gas static ovens.
- High-efficiency cast iron burners and flame spreaders with a single ring (5.5 kW) and double ring (9.0 kW).
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition by means of a pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, alkalis and flames.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> GN 2/1 GAS STATIC OVEN

>> AISI 304 stainless steel oven door.

>> Stainless steel cooking chamber and long-lasting steel mesh and glass fibre gasket resistant to high temperatures.

>> Equipped with thermostatic valve, 150-290°C regulation.

>> Pilot burner ignition with a thermocouple through a piezoelectric device.

>> Stainless steel removable side tray racks.

>> 1 grid included.

• AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.

• AISI 304 stainless steel control panel and side panels.

• Technical compartment to make easy the connection to the gas network.

• The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.

• The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	72 kW	GAS POWER	72 kW
OVEN POWER	2x7 kW	OPEN BURNER POWER	4x5,5 + 4x9 n°- kW
BOILING TOP POWER	58 kW	TRAY CAPACITY	n° 4xGN2/1
NATURAL GAS CONSUMPTION	7,61 m³/h	COOKING CHAMBER DIMENSIONS	57,5x65x30 cm
OVEN DIMENSIONS	GN2/1	GUIDES	n° 4 + 4
NUMBER OF BURNERS	n° 8	VERTICAL DISTANCE BETWEEN TRAYS	6 cm
OVEN TEMPERATURE RANGE	150÷290 °C	BOILING PAN SUPPORT	RAAF enamelled cast iron
OVEN TYPE	Static	CE GAS CERTIFICATE NUMBER	CE-0085BQ0326
ELECTRICAL CONNECTION HEIGHT (H)	25 mm	ELECTRICAL CONNECTION HEIGHT (X)	1529 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-75 mm	GAS CONNECTION DIAMETER	3/4"G EN10226-1
GAS CONNECTION HEIGHT (H)	484 mm	GAS CONNECTION HEIGHT (X)	1566 mm
GAS CONNECTION HEIGHT (Y)	-75 mm	FOOT HEIGHT	133 mm
FOOT ADJUSTMENT	133/195 mm	WIDTH	160 cm
DEPTH	90 cm	HEIGHT	90 cm
PACKAGE WIDTH	164,0 cm	PACKAGE DEPTH	100,0 cm
PACKAGE HEIGHT	115,0 cm	NET WEIGHT	278 kg
GROSS WEIGHT	308 kg	VOLUME	1,88 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	5.67 m³/h

ACCESSORIES

220590	EXTRA OVEN GRID GN2/1 (53X63CM)
319010	REAR COVERING PANEL FOR CABINET (L=80CM)
399538	PAN SUPPORT REDUCER
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)
619012	GN2/1 INOX TRAY

INSTALLATION SCHEMES



Fig.1 | Abb.1 | рис.1 || الصورة رقم ١ - 5415.618.00

⚡ SOLO VERSIONI CON FORNO ELETTRICO O VENTILATO | ONLY MODELS WITH ELECTRIC OVEN OR FAN ASSISTED
 نمذاج فقط مع فرن كهربائي أو بمساعدة مروحة