


313281

PCH12SG9

6-BURNER HERMETIC GAS BOILING TOP SUPER WITH CAST IRON GRIDS

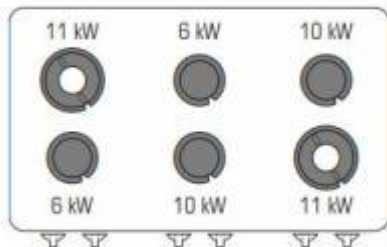

- 6-burner gas boiling top (120 cm), SUPER version.
- High-efficiency cast-iron burners hermetically fixed to the top and highly durable brass flame spreaders with single ring (6kW and 10kW) and double ring (11kW).
- Deep drawn worktop to prevent overflows and with rounded corners for maximum hygiene and easy cleaning.
- Main burner ignition by means of a pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grids to resist acids, alkalis and flames.
- Setup for installing a water tap.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	54 kW	GAS POWER	54 kW
OPEN BURNER POWER	6X2 + 10X2 + 11X2 n°- kW	BOILING TOP POWER	54 kW
NATURAL GAS CONSUMPTION	5,71 m³/h	NUMBER OF BURNERS	n° 6
BOILING PAN SUPPORT	RAAF enamelled cast iron	CE GAS CERTIFICATE NUMBER	CE-0085BQ0326
GAS CONNECTION DIAMETER	3/4"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	1166 mm	GAS CONNECTION HEIGHT (Y)	-75 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	120 cm	DEPTH	90 cm
HEIGHT	28 cm	PACKAGE WIDTH	125 cm
PACKAGE DEPTH	99 cm	PACKAGE HEIGHT	54 cm
NET WEIGHT	110 kg	GROSS WEIGHT	125 kg
VOLUME	0,66 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	4.26 m³/h	LATENT HEAT RELEASE	6480.0 W
SENSIBLE HEAT RELEASE	16200.0 W	STEAM RELEASE	9504.0 g/h

ACCESSORIES

- 319067 10KW HERMETIC FLAME SPREADER
- 319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)
- 399516 ADJUSTABLE WATER TAP
- 399538 PAN SUPPORT REDUCER
- 399573 PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

INSTALLATION SCHEMES



Fig.1 | Abb.1 | рис.1 || الصورة رقم ١ - 5415.618.00

⚡ SOLO VERSIONI CON FORNO ELETTRICO O VENTILATO | ONLY MODELS WITH ELECTRIC OVEN OR FAN ASSISTED
 نمذاج فقط مع فرن كهربائي أو بمساعدة مروحة