


313284

PCH12SFG9

6-BURNER HERMETIC GAS BOILING TOP SUPER WITH CAST IRON GRIDS FREESTANDING ON OPEN CABINET

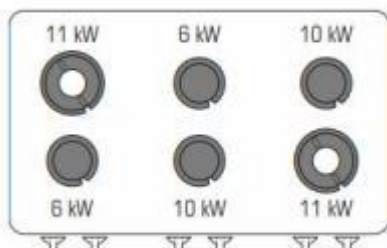

- Freestanding 6-burner gas boiling top on an open cabinet (120 cm), SUPER version.
- High-efficiency cast-iron burners hermetically fixed to the top and highly durable brass flame spreaders with single ring (6kW and 10kW) and double ring (11kW).
- Deep drawn worktop to prevent overflows and with rounded corners for maximum hygiene and easy cleaning.
- Main burner ignition by means of a pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grids to resist acids, alkalis and flames.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	54 kW	GAS POWER	54 kW
OPEN BURNER POWER	6X2 + 10X2 + 11X2 n°- kW	BOILING TOP POWER	54 kW
NATURAL GAS CONSUMPTION	5,71 m³/h	CABINET DIMENSIONS	113x76,1x39,5 cm
NUMBER OF BURNERS	n° 6	BOILING PAN SUPPORT	RAAF enamelled cast iron
CE GAS CERTIFICATE NUMBER	CE-0085BQ0326	GAS CONNECTION DIAMETER	3/4"G EN10226-1
GAS CONNECTION HEIGHT (H)	484 mm	GAS CONNECTION HEIGHT (X)	1166 mm
GAS CONNECTION HEIGHT (Y)	-75 mm	FOOT HEIGHT	133 mm
FOOT ADJUSTMENT	133/195 mm	WIDTH	120 cm
DEPTH	90 cm	HEIGHT	90 cm
PACKAGE WIDTH	127 cm	PACKAGE DEPTH	100,0 cm
PACKAGE HEIGHT	116,0 cm	NET WEIGHT	120,8 kg
GROSS WEIGHT	146 kg	VOLUME	1,47 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	4.26 m³/h
LATENT HEAT RELEASE	6480.0 W	SENSIBLE HEAT RELEASE	16200.0 W
STEAM RELEASE	9504.0 g/h		

ACCESSORIES

319002	STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
319011	REAR COVERING PANEL FOR CABINET (L=120CM)
319067	10KW HERMETIC FLAME SPREADER
319068	HERMETIC FLAME SPREADER (5 - 6 - 7 KW)
399516	ADJUSTABLE WATER TAP
399538	PAN SUPPORT REDUCER
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

INSTALLATION SCHEMES

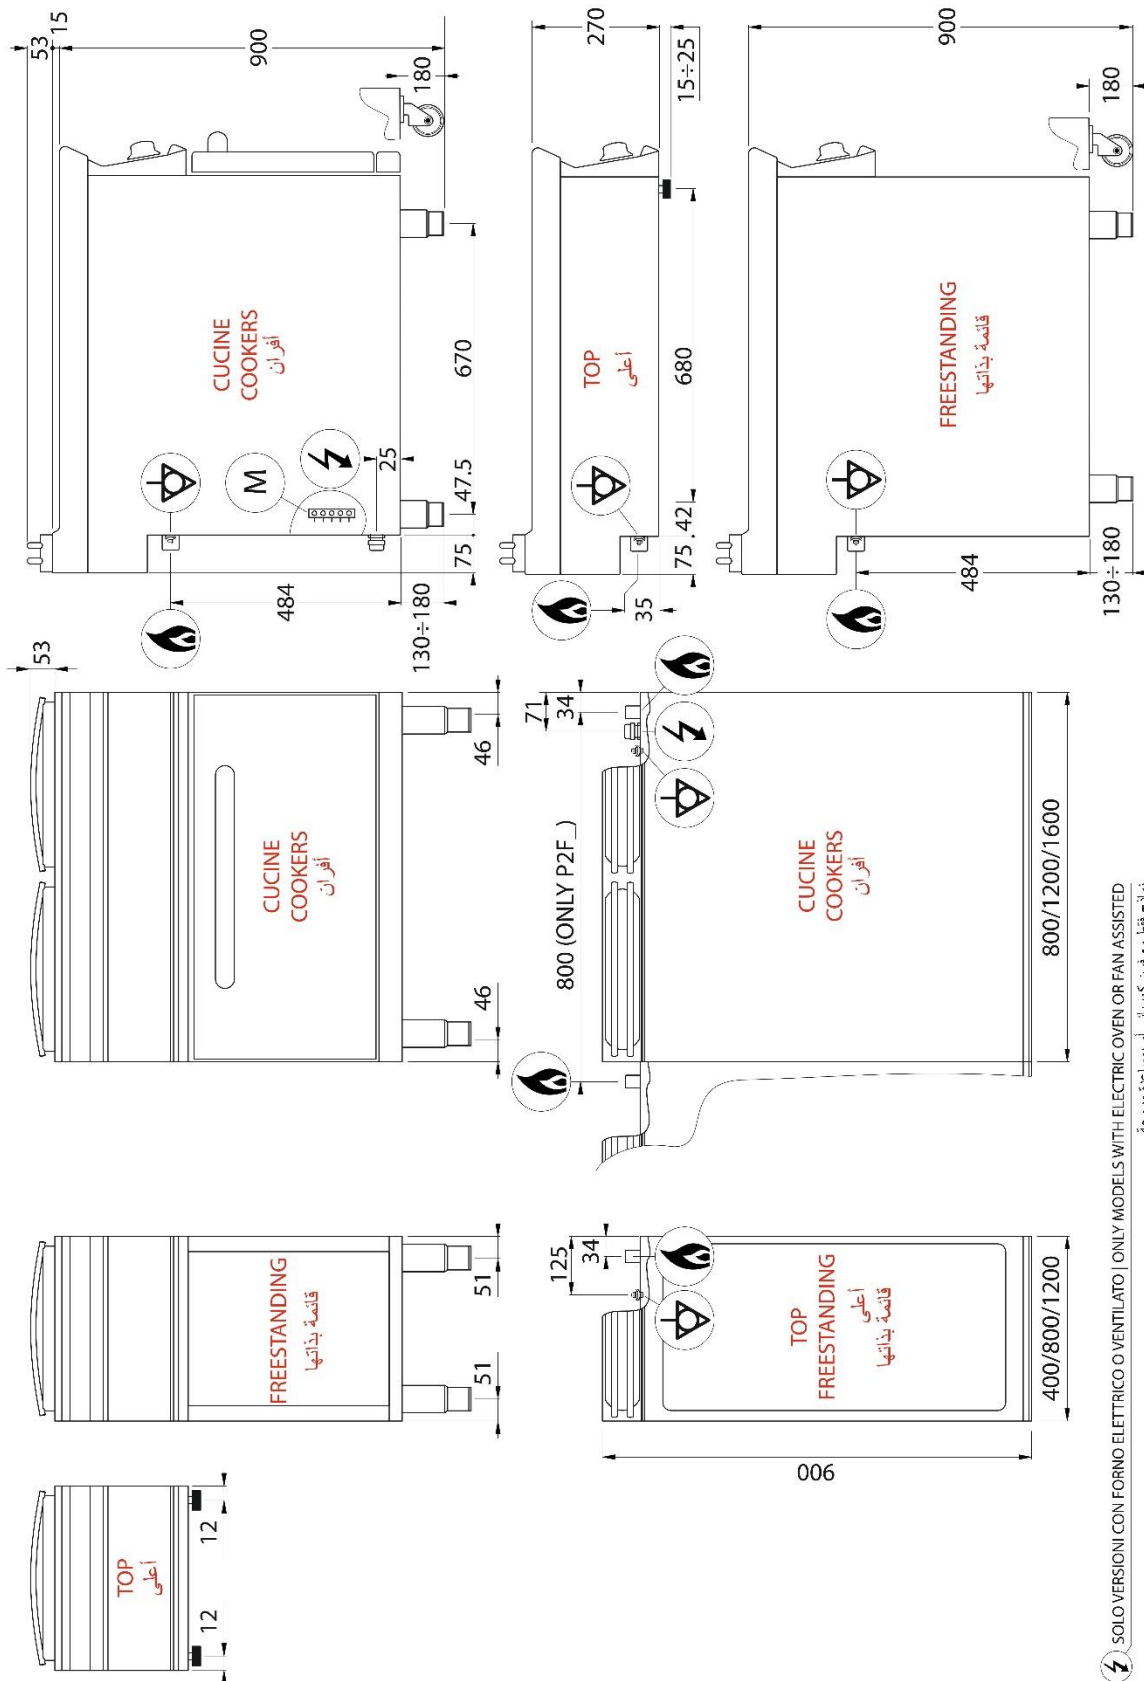


Fig.1 | Abb.1 | рис.1 || الصورة رقم ١ - 5415.618.00

⚡ SOLO VERSIONI CON FORNO ELETTRICO O VENTILATO | ONLY MODELS WITH ELECTRIC OVEN OR FAN ASSISTED
 نمذاج فقط مع فرن كهربائي أو بمساعدة مروحة