


313286

PFH12GG9

6-BURNERS HERMETIC GAS BOILING TOP WITH CAST IRON GRIDS ON GN2/1 GAS STATIC OVEN WITH 1 GRID

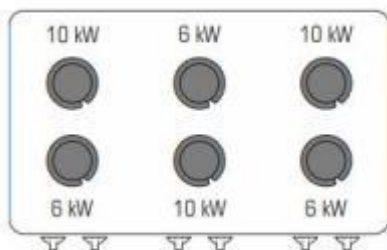

- 6-burner gas cooker on a GN 2/1 gas static oven and cabinet with door, total width 120 cm.
- High-efficiency cast-iron burners hermetically fixed to the top and highly durable brass flame spreaders with single ring 6kW and 10kW.
- Deep drawn worktop to prevent overflows and with rounded corners for maximum hygiene and easy cleaning.
- Main burner ignition by means of a pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grids to resist acids, alkalis and flames.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> GN 2/1 GAS STATIC OVEN

>> AISI 304 stainless steel oven door.

>> Stainless steel cooking chamber and long-lasting steel mesh and glass fibre gasket resistant to high temperatures.

>> Equipped with thermostatic valve, 150-290°C adjustment.

>> Pilot burner ignition with a thermocouple through a piezoelectric device.

>> Removable stainless steel side tray racks.

>> 1 grid included.

- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	55 kW	GAS POWER	55 kW
OVEN POWER	7 kW	OPEN BURNER POWER	6X3 + 10X3 n°- kW
BOILING TOP POWER	48 kW	TRAY CAPACITY	n° 4xGN2/1
NATURAL GAS CONSUMPTION	5,82 m³/h	COOKING CHAMBER DIMENSIONS	57,5x65x30 cm
OVEN DIMENSIONS	GN2/1	CABINET DIMENSIONS	33x76,1x39,5 cm
GUIDES	n° 4	NUMBER OF BURNERS	n° 6
VERTICAL DISTANCE BETWEEN TRAYS	6 cm	OVEN TEMPERATURE RANGE	150÷290 °C
BOILING PAN SUPPORT	RAAF enamelled cast iron	OVEN TYPE	Static
CE GAS CERTIFICATE NUMBER	CE-0085BQ0326	ELECTRICAL CONNECTION HEIGHT (H)	25 mm
ELECTRICAL CONNECTION HEIGHT (X)	1129 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-75 mm
GAS CONNECTION DIAMETER	3/4"G EN10226-1	GAS CONNECTION HEIGHT (H)	484 mm
GAS CONNECTION HEIGHT (X)	1166 mm	GAS CONNECTION HEIGHT (Y)	-75 mm
FOOT HEIGHT	133 mm	FOOT ADJUSTMENT	133/195 mm
WIDTH	120 cm	DEPTH	90 cm
HEIGHT	90 cm	PACKAGE WIDTH	125 cm
PACKAGE DEPTH	100,0 cm	PACKAGE HEIGHT	117 cm
NET WEIGHT	196,4 kg	GROSS WEIGHT	218,4 kg
VOLUME	01,4600 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	4.33 m³/h	LATENT HEAT RELEASE	6600.0 W
SENSIBLE HEAT RELEASE	16500.0 W	STEAM RELEASE	9680.0 g/h

ACCESSORIES

220590	EXTRA OVEN GRID GN2/1 (53X63CM)
319011	REAR COVERING PANEL FOR CABINET (L=120CM)
319067	10KW HERMETIC FLAME SPREADER
319068	HERMETIC FLAME SPREADER (5 - 6 - 7 KW)
399516	ADJUSTABLE WATER TAP
399538	PAN SUPPORT REDUCER
399573	PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)
619012	GN2/1 INOX TRAY

INSTALLATION SCHEMES



Fig.1 | Abb.1 | рис.1 || الصورة رقم ١ - 5415.618.00

⚡ SOLO VERSIONI CON FORNO ELETTRICO O VENTILATO | ONLY MODELS WITH ELECTRIC OVEN OR FAN ASSISTED
 نمذاج فقط مع فرن كهربائي أو بمساعدة مروحة