


313294

PFXH12SGGE9

6-BURNER HERMETIC GAS BOILING TOP SUPER WITH CAST IRON GRIDS ON GAS STATIC FULLSIZE OVEN AND ELECTRIC GRILL WITH 1 GRID

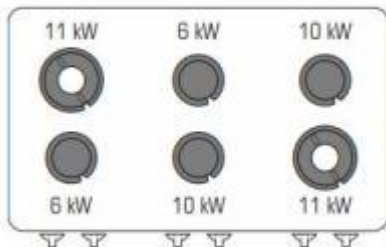

- 6-burner gas cooker on a FULL-SIZE gas static oven (H40 92.5x63x40 cm) with ELECTRIC GRILL, total width 120 cm, SUPER version.
- High-efficiency cast-iron burners hermetically fixed to the top and highly durable brass flame spreaders with single ring (6kW and 10kW) and double ring (11kW).
- Deep drawn worktop to prevent overflows and with rounded corners for maximum hygiene and easy cleaning.
- Main burner ignition by means of a pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grids to resist acids, alkalis and flames.
- Setup for installing a water tap.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> FULL-SIZE GAS STATIC OVEN H40 92.5x63x40 CM WITH ELECTRIC GRILL.

>> AISI 304 stainless steel oven door.

>> Stainless steel cooking chamber with 2 removable pickled steel bottoms (3 mm thick).

>> Long-lasting steel mesh and glass fibre gasket resistant to high temperatures.

>> Chrome-plated steel tubular burner.

>> Equipped with thermostatic valve, 0-150-290°C adjustment.

>> Pilot burner ignition with a thermocouple through a piezoelectric device.

>> Removable stainless steel side tray racks.

>> 1 grid included.

• AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.

• AISI 304 stainless steel control panel and side panels.

• Technical compartment to make easy the connection to the gas network.

• The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.

• The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

| | | | |
|-----------------------------------|-------------------|----------------------------------|--------------------------|
| TOTAL POWER | 61 + 3 kW | GAS POWER | 61 kW |
| ELECTRIC POWER | 3 kW | FREQUENCY | 50/60 Hz |
| VOLTAGE | 230 ~ V | OVEN POWER | 7 + 3(grill) kW |
| OPEN BURNER POWER | 6X3 + 10X3 n°- kW | BOILING TOP POWER | 54 kW |
| TRAY CAPACITY | n° 4x(883x603) | NATURAL GAS CONSUMPTION | 6,46 m³/h |
| COOKING CHAMBER DIMENSIONS | 92,5x63x40 cm | OVEN DIMENSIONS | Full size H. 40 cm |
| CABINET DIMENSIONS | 33x76,1x39,5 cm | GUIDES | n° 4 |
| VERTICAL DISTANCE BETWEEN TRAYS | 6 cm | OVEN TEMPERATURE RANGE | 150÷290 °C |
| MINIMUM POWER CABLE CROSS-SECTION | 3 x 1,5 n° - mm² | BOILING PAN SUPPORT | RAAF enamelled cast iron |
| ELECTRIC CABLE TYPE | H07 RN-F | OVEN TYPE | Static |
| CE GAS CERTIFICATE NUMBER | CE-0085BQ0326 | ELECTRICAL CONNECTION HEIGHT (Y) | -75 mm |
| GAS CONNECTION DIAMETER | 3/4"G EN10226-1 | GAS CONNECTION HEIGHT (H) | 484 mm |
| GAS CONNECTION HEIGHT (X) | 1166 mm | GAS CONNECTION HEIGHT (Y) | -75 mm |
| FOOT HEIGHT | 133 mm | FOOT ADJUSTMENT | 133/195 mm |
| WIDTH | 120 cm | DEPTH | 90 cm |
| HEIGHT | 90 cm | PACKAGE WIDTH | 126 cm |
| PACKAGE DEPTH | 100,0 cm | PACKAGE HEIGHT | 116,0 cm |
| NET WEIGHT | 210,0000 kg | GROSS WEIGHT | 229 kg |
| VOLUME | 01,4600 m³ | HARMONISED CODE | 84198180 |
| LPG CONSUMPTION | 4.81 m³/h | LATENT HEAT RELEASE | 7320.0 W |
| SENSIBLE HEAT RELEASE | 18300.0 W | STEAM RELEASE | 10736.0 g/h |

ACCESSORIES

| | |
|--------|--|
| 220595 | EXTRA FULL-SIZE OVEN GRID (88X62CM) |
| 319011 | REAR COVERING PANEL FOR CABINET (L=120CM) |
| 319067 | 10KW HERMETIC FLAME SPREADER |
| 319068 | HERMETIC FLAME SPREADER (5 - 6 - 7 KW) |
| 399516 | ADJUSTABLE WATER TAP |
| 399538 | PAN SUPPORT REDUCER |
| 399573 | PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM) |
| 619013 | FULL SIZE INOX TRAY |

INSTALLATION SCHEMES

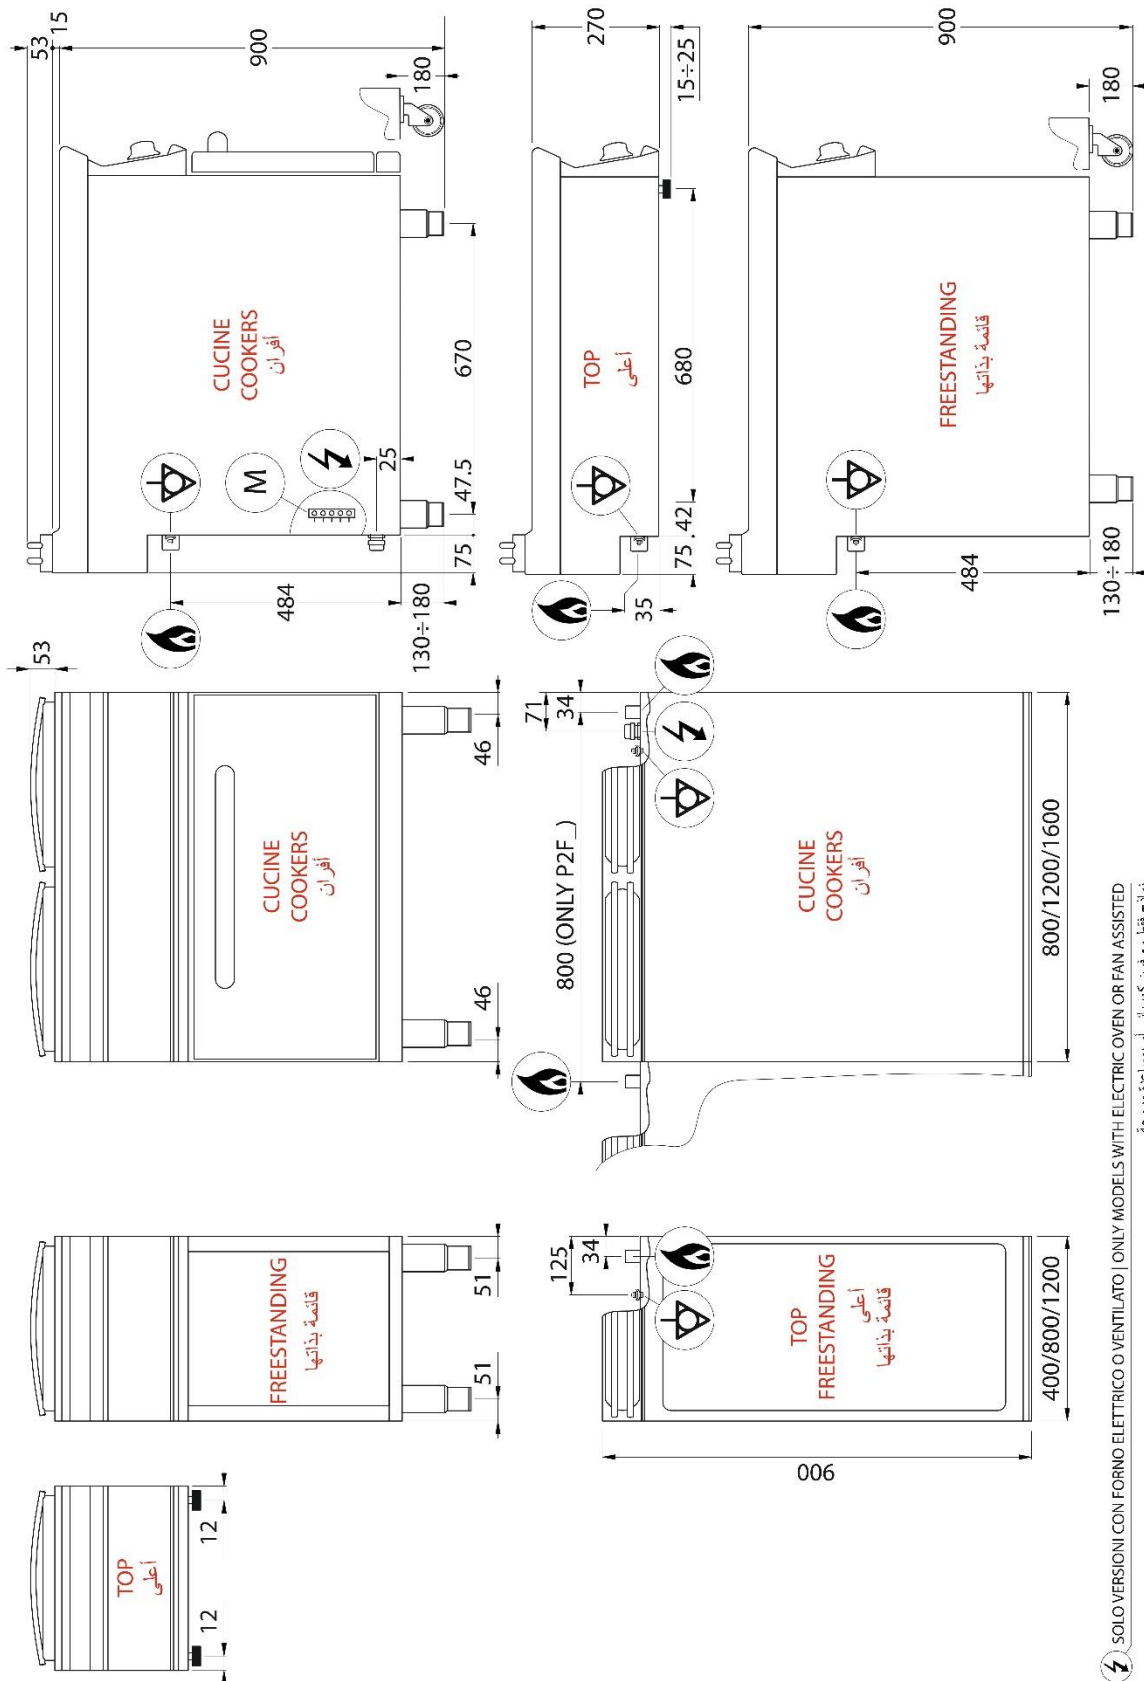


Fig.1 | Abb.1 | рис.1 || الصورة رقم ١ - 5415.618.00

⚡ SOLO VERSIONI CON FORNO ELETTRICO O VENTILATO | ONLY MODELS WITH ELECTRIC OVEN OR FAN ASSISTED
 نمذاج فقط مع فرن كهربائي أو بمساعدة مروحة