


**316005**

PC12E9

**ELECTRIC BOILING TOP WITH 6 SQUARED HERMETIC PLATES (30X30CM - 11.8X11.8IN, TOP VERSION)**



- Electric boiling top with 6 squared plates (120 cm).
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Cast iron squared electric plates (30x30) hermetically fixed to the deep drawn worktop.
- 4 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating and control commands specific for each plate.
- Lights warning when the plates are ignited.
- Setup for installing a water tap.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the electrical network.

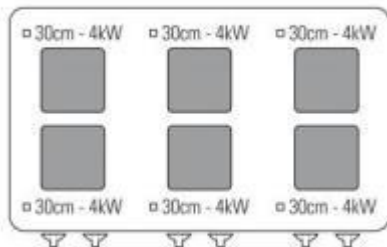

## TECHNICAL DATA

TOTAL POWER	24 kW	ELECTRIC POWER	24 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
BOILING TOP POWER	24 kW	COOKING ZONE POWER	6x4 n°- kW
ELECTRIC PLATE DIMENSIONS	30x30 cm	NUMBER OF COOKING ZONES	n° 6
MINIMUM POWER CABLE CROSS-SECTION	5 x 6 n° - mm <sup>2</sup>	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (H)	35 mm	ELECTRICAL CONNECTION HEIGHT (X)	1129 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-75 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	120 cm	DEPTH	90 cm
HEIGHT	28 cm	PACKAGE WIDTH	126,0 cm
PACKAGE DEPTH	100,0 cm	PACKAGE HEIGHT	54,0 cm
NET WEIGHT	112 kg	GROSS WEIGHT	122 kg
VOLUME	0,6800 m <sup>3</sup>	HARMONISED CODE	84198180
LATENT HEAT RELEASE	1920.0 W	SENSIBLE HEAT RELEASE	4800.0 W
STEAM RELEASE	2832.0 g/h		

## ACCESSORIES

- 399516 ADJUSTABLE WATER TAP
- 399532 TOP FRAME FOR 2 PLATES
- 399573 PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

INSTALLATION SCHEMES

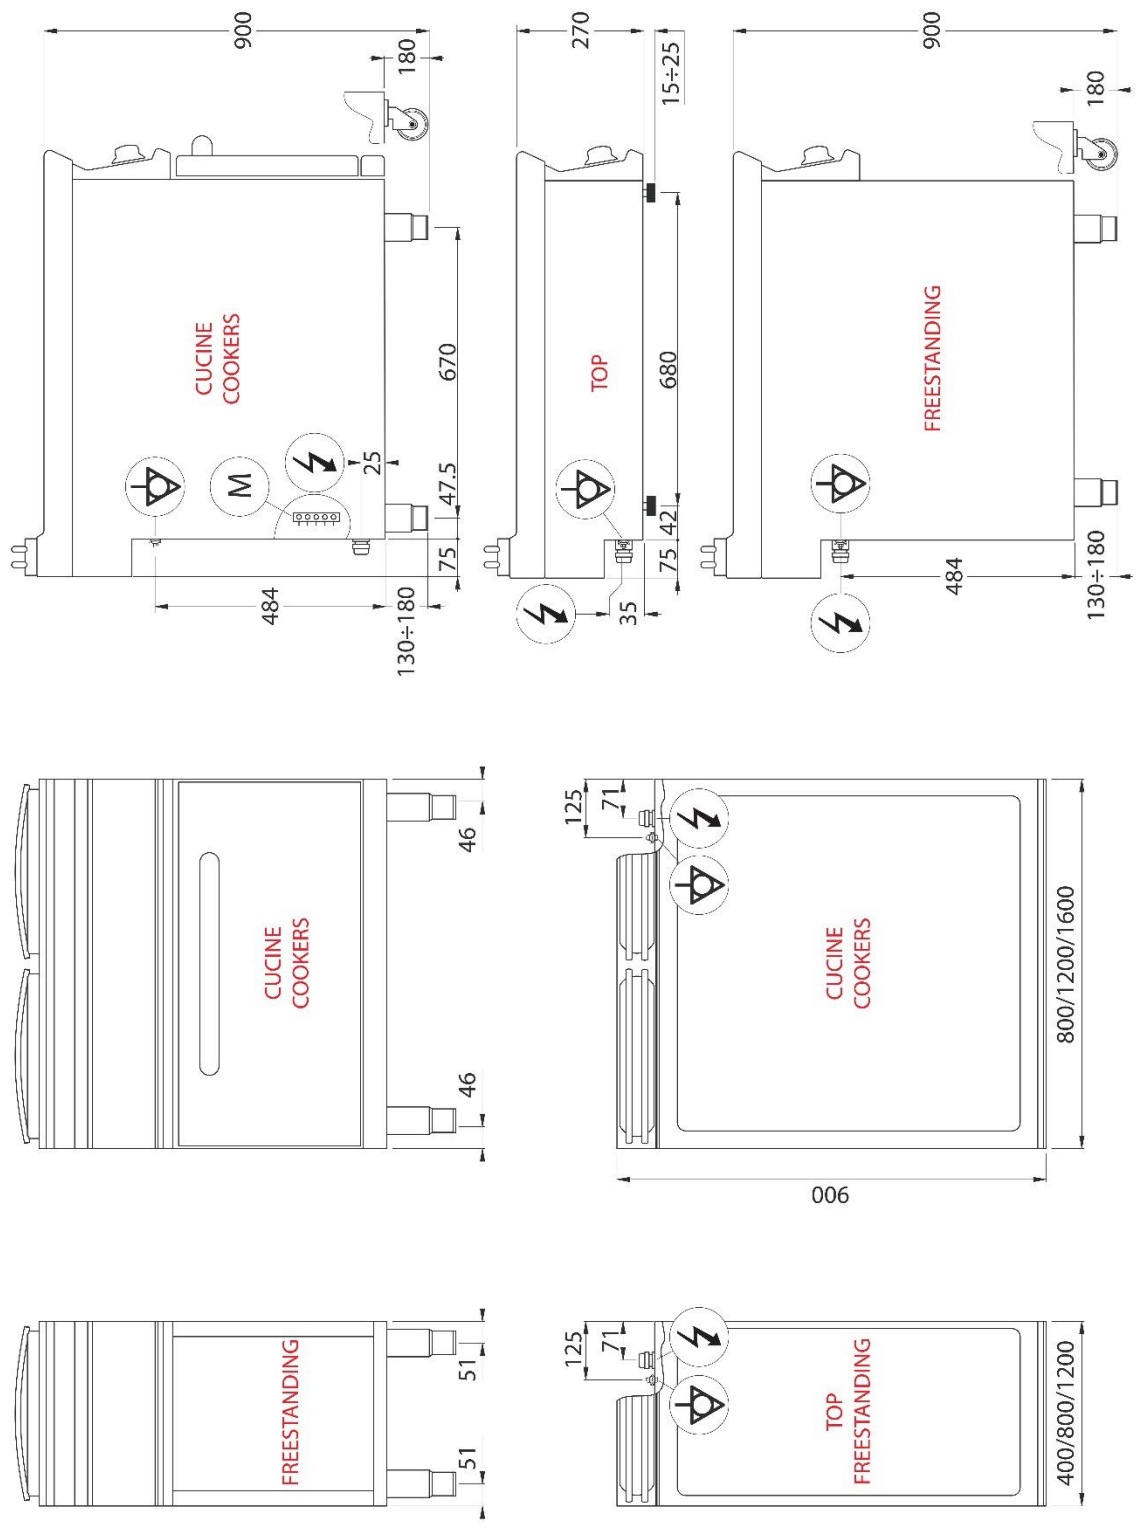


Fig.1 | Abb.1 | pvc.1 - 5415.561.00