

316017

PCC4E9

GLASS CERAMIC BOILING TOP WITH 2 HEATING ZONES (TOP VERSION)



- Glass ceramic electric boiling top (40 cm) with 2 independent cooking zones.
- Glass ceramic top (6 mm thick) hermetically sealed to the worktop for maximum hygiene and ease of cleaning.
- Ultra-rapid infrared heating elements with a power of 3.4 kW for each independent zone.
- Energy regulator 0-6-infinite.
- Temperature limiter to prevent overheating.
- Heating and control commands specific for each zone.
- Lights warning when the heating zones are active.
- Warning lamps on the glass to enhance operator safety by signalling residual heat.
- Setup for installing a water tap.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to make easy the connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	6,8 kW	ELECTRIC POWER	6,8 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	6,8 kW	COOKING ZONE POWER	2x3,4 n°- kW
2-ZONE HEATING ELEMENTS	n° 2	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
HEATING ZONES	n° 2	ELECTRICAL CONNECTION HEIGHT (H)	35 mm
ELECTRICAL CONNECTION HEIGHT (X)	329 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-75 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	40 cm
DEPTH	90 cm	HEIGHT	28 cm
PACKAGE WIDTH	100,0 cm	PACKAGE DEPTH	46,0 cm
PACKAGE HEIGHT	58,0 cm	NET WEIGHT	24,0000 kg
GROSS WEIGHT	32,0000 kg	VOLUME	0,2600 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	544.0 W
SENSIBLE HEAT RELEASE	1360.0 W	STEAM RELEASE	802.4 g/h

ACCESSORIES

- 399516 ADJUSTABLE WATER TAP
 399573 PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

INSTALLATION SCHEMES

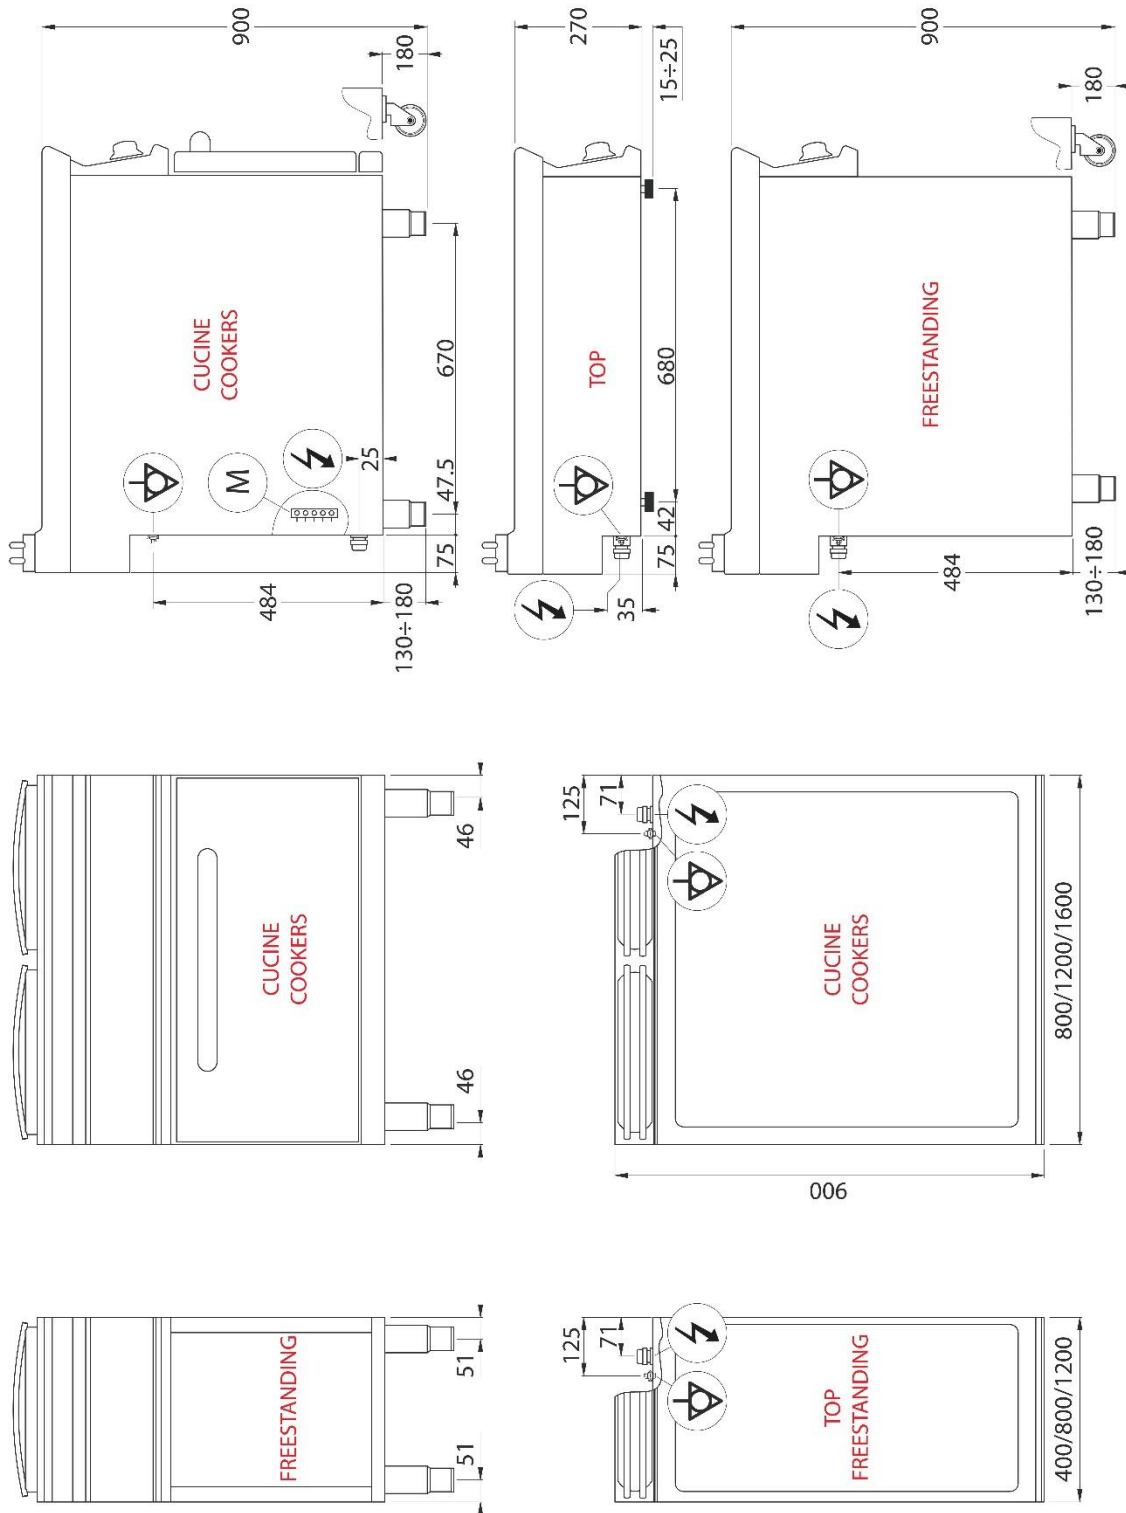


Fig.1 | Abb.1 | pvc.1 - 5415.561.00