


613004

PCP70G7

2-BURNER GAS BOILING TOP WITH CAST IRON GRIDS AND HEATING PLATE (TOP VERSION)



- Gas solid top, top version (35 cm) and 2 open burners (35 cm).
- Non-deformable cast iron plate (1 cm thick).
- Cast iron central burner (4.5 kW) to reach a temperature of 400°C at the plate centre, with pilot burner and safety thermocouple.
- Valved gas cock.
- Hob with single-ring cast iron burners (3.3 kW) and double-ring burners (7.2 kW); ignition of the main burners through a pilot burner equipped with a safety thermocouple and pan support grids with enamelled cast iron grates to be resistant to acids, alkalis, and flames.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the gas network.
- Gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.



TECHNICAL DATA

TOTAL POWER	15 kW	GAS POWER	15 kW
OPEN BURNER POWER	1x7,2 + 1x3,3 n°- kW	BOILING TOP POWER	15 kW
GAS PLATE POWER	1x4,5 n°- kW	NATURAL GAS CONSUMPTION	1,58 m³/h
ELECTRIC PLATE DIMENSIONS	30,9x55,4 cm	NUMBER OF BURNERS	n° 2 + 1 (plate)
BOILING PAN SUPPORT	RAAF enamelled cast iron	PLATE TYPE	Cast iron
HEATING ZONES	n° 1	CE GAS CERTIFICATE NUMBER	CE-0085BO0091
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	26 mm
GAS CONNECTION HEIGHT (X)	657 mm	GAS CONNECTION HEIGHT (Y)	-78 mm
FOOT HEIGHT	25 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	70 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	78 cm	PACKAGE DEPTH	81,0 cm
PACKAGE HEIGHT	53,0 cm	NET WEIGHT	61,0000 kg
GROSS WEIGHT	69,0000 kg	VOLUME	0,3300 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	1.18 m³/h
LATENT HEAT RELEASE	1800.0 W	SENSIBLE HEAT RELEASE	4500.0 W
STEAM RELEASE	2640.0 g/h		

ACCESSORIES

120655 PAN SUPPORT REDUCER
220585 JOINT

INSTALLATION SCHEMES

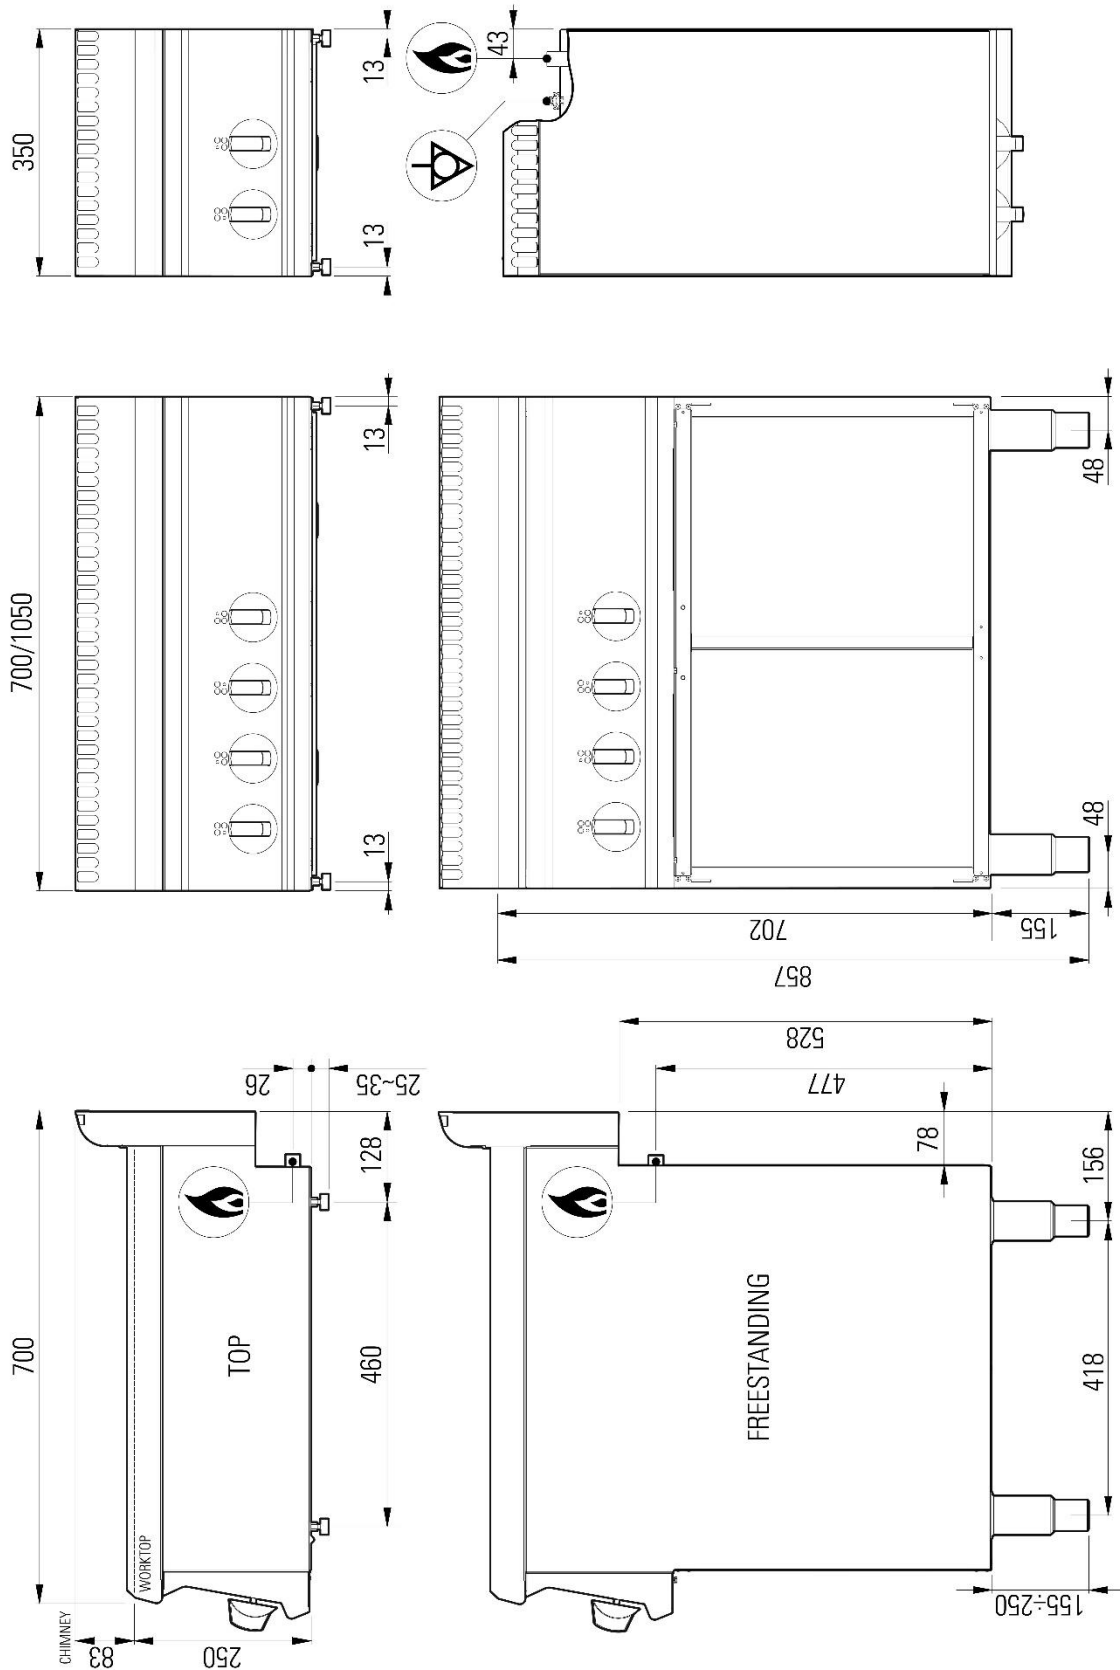


Fig.1 | Abb.1 | рис.1 - 5415.550.00