

---

**613006**


PPC70G7

**GAS SOLID TOP BOILING TOP (TOP VERSION)**

---



- Gas solid top, top version (70 cm).
- Non-deformable cast iron plate (1 cm thick).
- Cast iron central burner (9 kW) to reach a temperature of 400°C at the plate centre, with pilot burner and safety thermocouple.
- Piezoelectric ignition.
- Valved gas cock.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.



## TECHNICAL DATA

TOTAL POWER	9 kW	GAS POWER	9 kW
BOILING TOP POWER	9 kW	GAS PLATE POWER	1x9 n°- kW
NATURAL GAS CONSUMPTION	0,95 m³/h	ELECTRIC PLATE DIMENSIONS	62,8x55,8 cm
NUMBER OF BURNERS	n° 1 (plate)	BOILING PAN SUPPORT	RAAF enamelled cast iron
PLATE TYPE	Cast iron	HEATING ZONES	n° 1
CE GAS CERTIFICATE NUMBER	CE-0085BO0092	GAS CONNECTION DIAMETER	1/2"G EN10226-1
GAS CONNECTION HEIGHT (H)	26 mm	GAS CONNECTION HEIGHT (X)	657 mm
GAS CONNECTION HEIGHT (Y)	-78 mm	FOOT HEIGHT	25 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	70 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	77,0 cm
PACKAGE DEPTH	81,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	66,0000 kg	GROSS WEIGHT	74,0000 kg
VOLUME	0,3300 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	0.71 m³/h		

## ACCESSORIES

220585 JOINT

INSTALLATION SCHEMES

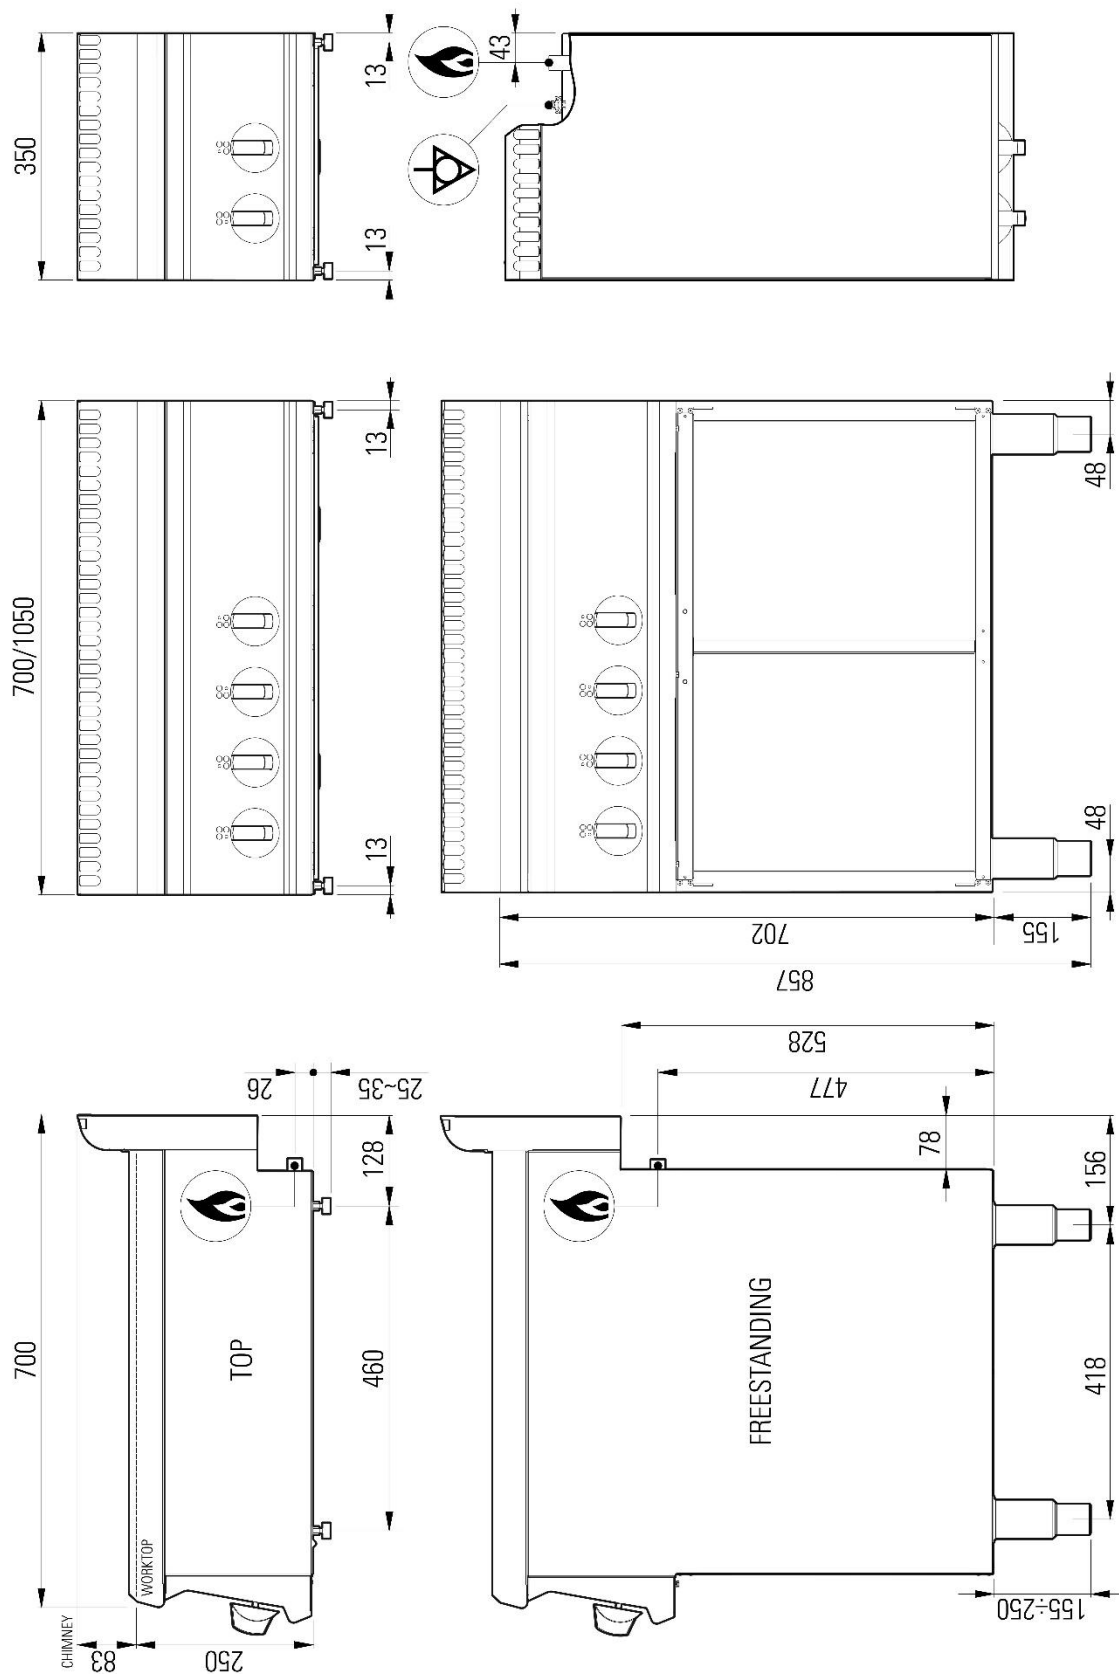


Fig.1 | Abb.1 | рис.1 - 5415.550.00