

613035

CP70G7

**GN2/3 FREESTANDING DOUBLE TANK 23+23L GAS PASTA COOKER ON CLOSED CABINET - BASKETS NOT INCLUDED**



- Freestanding gas pasta cooker (23 + 23 l) GN2/3 on a closed cabinet (70 cm) with 2 independent tanks.
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- The pasta cooker is used to boil pasta, rice, vegetables, meat and other products.
- The deep drawn tank with rounded corners is seamlessly welded to an AISI 304 top, Scotch Brite finish.
- AISI 316 stainless steel tank, drainpipe, and false bottom for long-lasting resistance against salt corrosion.
- Water filling control inside the control panel with water injector inside the tank.
- Heating through a 10 kW tubular burner with adjustment through valved cock.
- Piezoelectric ignition.
- Pilot burner and safety thermocouple.
- Safety thermostat to protect the tank against ignition without water or excessive evaporation.
- Overflow for draining starch in the front part of the tank.
- Bottom drain.
- Technical compartment for easy connection to the gas network.
- Baskets not included.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

## TECHNICAL DATA

TOTAL POWER	20 kW	GAS POWER	20 kW
TANK CAPACITY	23lt+23lt	LOADING WATER	Injector in the tank
NATURAL GAS CONSUMPTION	2,1 m³/h	TANK DIMENSIONS	30,5x34x29 cm
TANK TYPE	AISI 316	CE GAS CERTIFICATE NUMBER	CE-0085B00097
WATER CONNECTION POSITION	Bottom	WATER DRAIN POSITION	Bottom
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	0 mm
GAS CONNECTION HEIGHT (X)	20 mm	GAS CONNECTION HEIGHT (Y)	-487 mm
WATER CONNECTION DIAMETER	1/2"	WATER CONNECTION HEIGHT (H)	0 mm
WATER CONNECTION HEIGHT (X)	120 mm	WATER CONNECTION HEIGHT (Y)	-190 mm
DRAIN DIAMETER	1"	DRAIN CONNECTION HEIGHT (H)	0 mm
DRAIN CONNECTION HEIGHT (X)	470 mm	DRAIN CONNECTION HEIGHT (Y)	-360 mm
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
WIDTH	70 cm	DEPTH	70 cm
HEIGHT	85 cm	PACKAGE WIDTH	76,0 cm
PACKAGE DEPTH	81 cm	PACKAGE HEIGHT	114,0 cm
NET WEIGHT	67,0000 kg	GROSS WEIGHT	84 kg
VOLUME	0,7000 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	1.58 m³/h	LATENT HEAT RELEASE	6000.0 W
SENSIBLE HEAT RELEASE	2000.0 W	STEAM RELEASE	8820.0 g/h

## ACCESSORIES

120620	PASTA COOKER BASKETS (2 X GN1/3) - DIM. CM (29X16X20H)
120625	PASTA COOKER BASKET (4 X GN1/6) - DIM. CM (14X14X20H)
120635	PASTA COOKER BASKET (1 X GN2/3) - DIM. CM (29X29X20H)
120652	PASTA COOKER LID (GN2/3)
120660	PASTA COOKER BASKET (1 X GN1/3 + 2 X GN1/6) - DIM. CM (29X16X20H) (14X14X20H)
120700	PASTA COOKER BASKET (2 X GN2/6) - DIM. CM (14.5X29X20H)
220585	JOINT
220722	COVERING PANEL FOR FREESTANDING ELEMENTS (50MM)

INSTALLATION SCHEMES

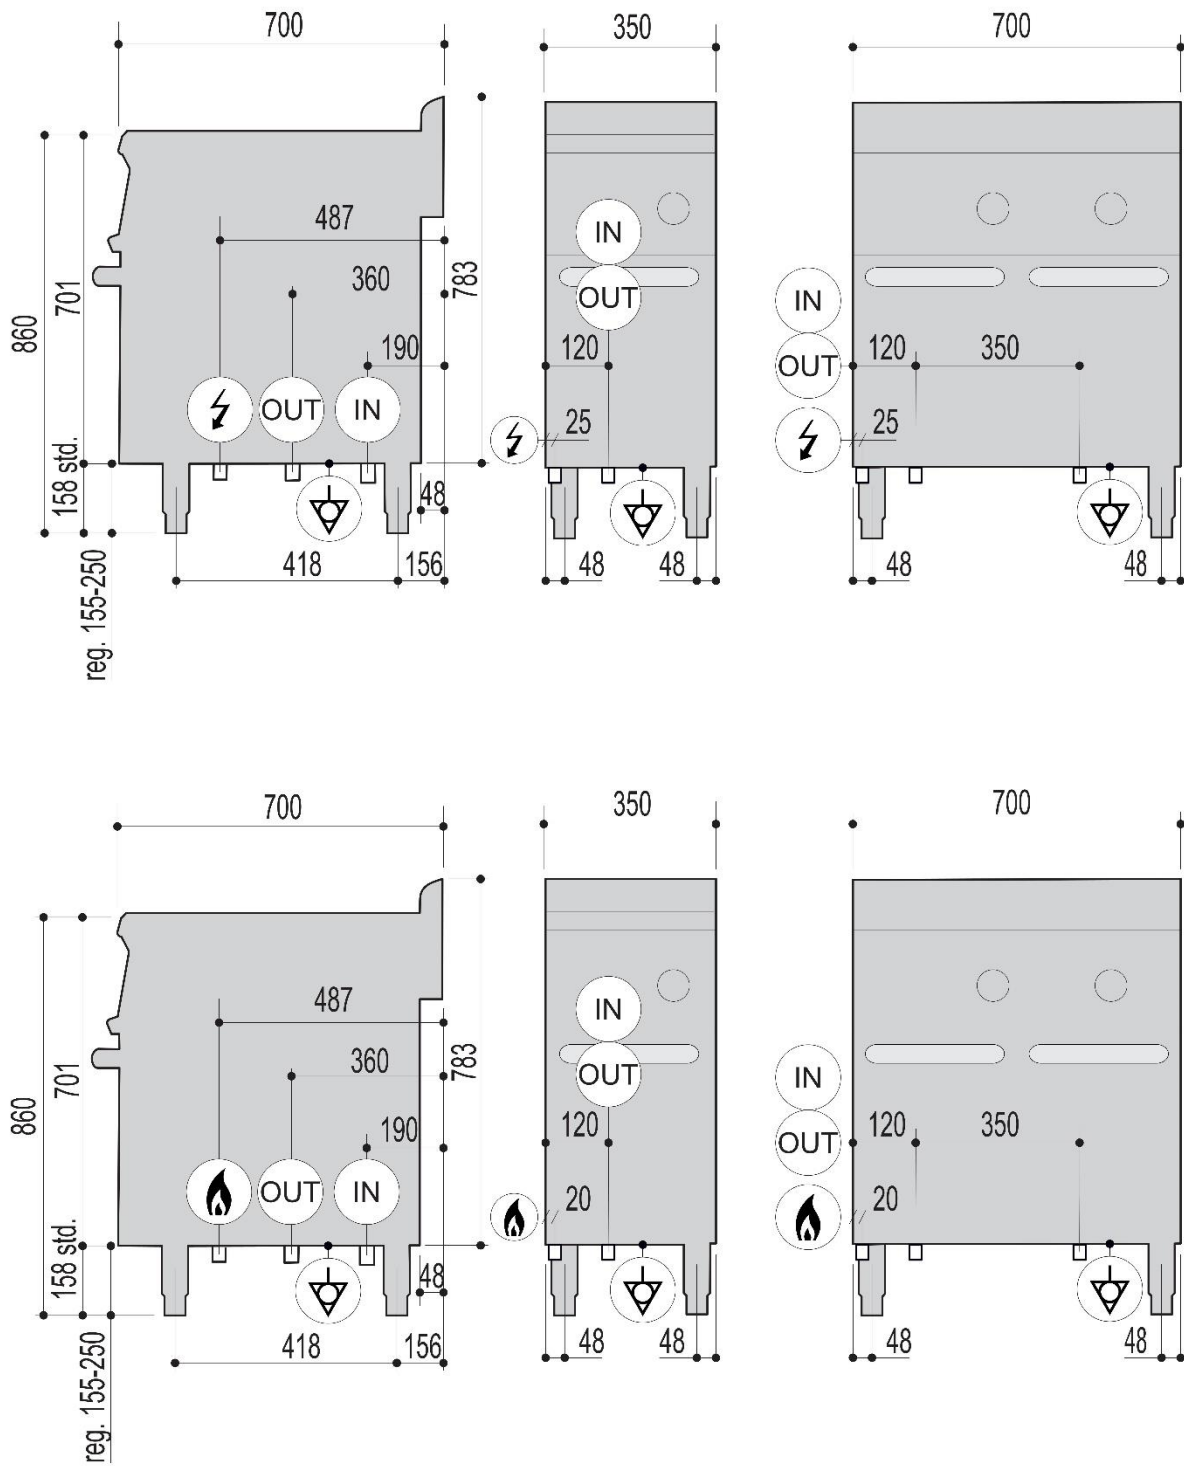


Fig.1 | Abb.1 | рис.1 - 5415.666.00