


613036

PC70G7A

**FREESTANDING 4-BURNER GAS BOILING TOP ON OPEN CABINET**



- Freestanding 4-burner gas boiling top (70 cm) on an open cabinet.
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- High-efficiency cast iron burners and flame spreaders with a single ring (3.3 and 4.5 kW) and double ring (7.2 kW).
- Main burner ignition via pilot burner with safety thermocouple.
- Valved gas cock.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.



## TECHNICAL DATA

TOTAL POWER	19,5 kW	GAS POWER	19,5 kW
OPEN BURNER POWER	1x7,2+1x3,3+2x4,5 n°- kW	BOILING TOP POWER	19,5 kW
NATURAL GAS CONSUMPTION	2,06 m³/h	CABINET DIMENSIONS	69,5x57x40 cm
NUMBER OF BURNERS	n° 4	BOILING PAN SUPPORT	RAAF enamelled cast iron
CE GAS CERTIFICATE NUMBER	CE-0085BO0091	GAS CONNECTION DIAMETER	1/2"G EN10226-1
GAS CONNECTION HEIGHT (H)	477 mm	GAS CONNECTION HEIGHT (X)	657 mm
GAS CONNECTION HEIGHT (Y)	-78 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	WIDTH	70 cm
DEPTH	70 cm	HEIGHT	85 cm
PACKAGE WIDTH	76,0 cm	PACKAGE DEPTH	80,0 cm
PACKAGE HEIGHT	113 cm	NET WEIGHT	55,2 kg
GROSS WEIGHT	71,2 kg	VOLUME	0,68 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	1.54 m³/h
LATENT HEAT RELEASE	2340.0 W	SENSIBLE HEAT RELEASE	5850.0 W
STEAM RELEASE	3432.0 g/h		

## ACCESSORIES

120655	PAN SUPPORT REDUCER
220585	JOINT
220722	COVERING PANEL FOR FREESTANDING ELEMENTS (50MM)
619009	RH/LH STAINLESS STEEL DOOR FOR BASES

INSTALLATION SCHEMES

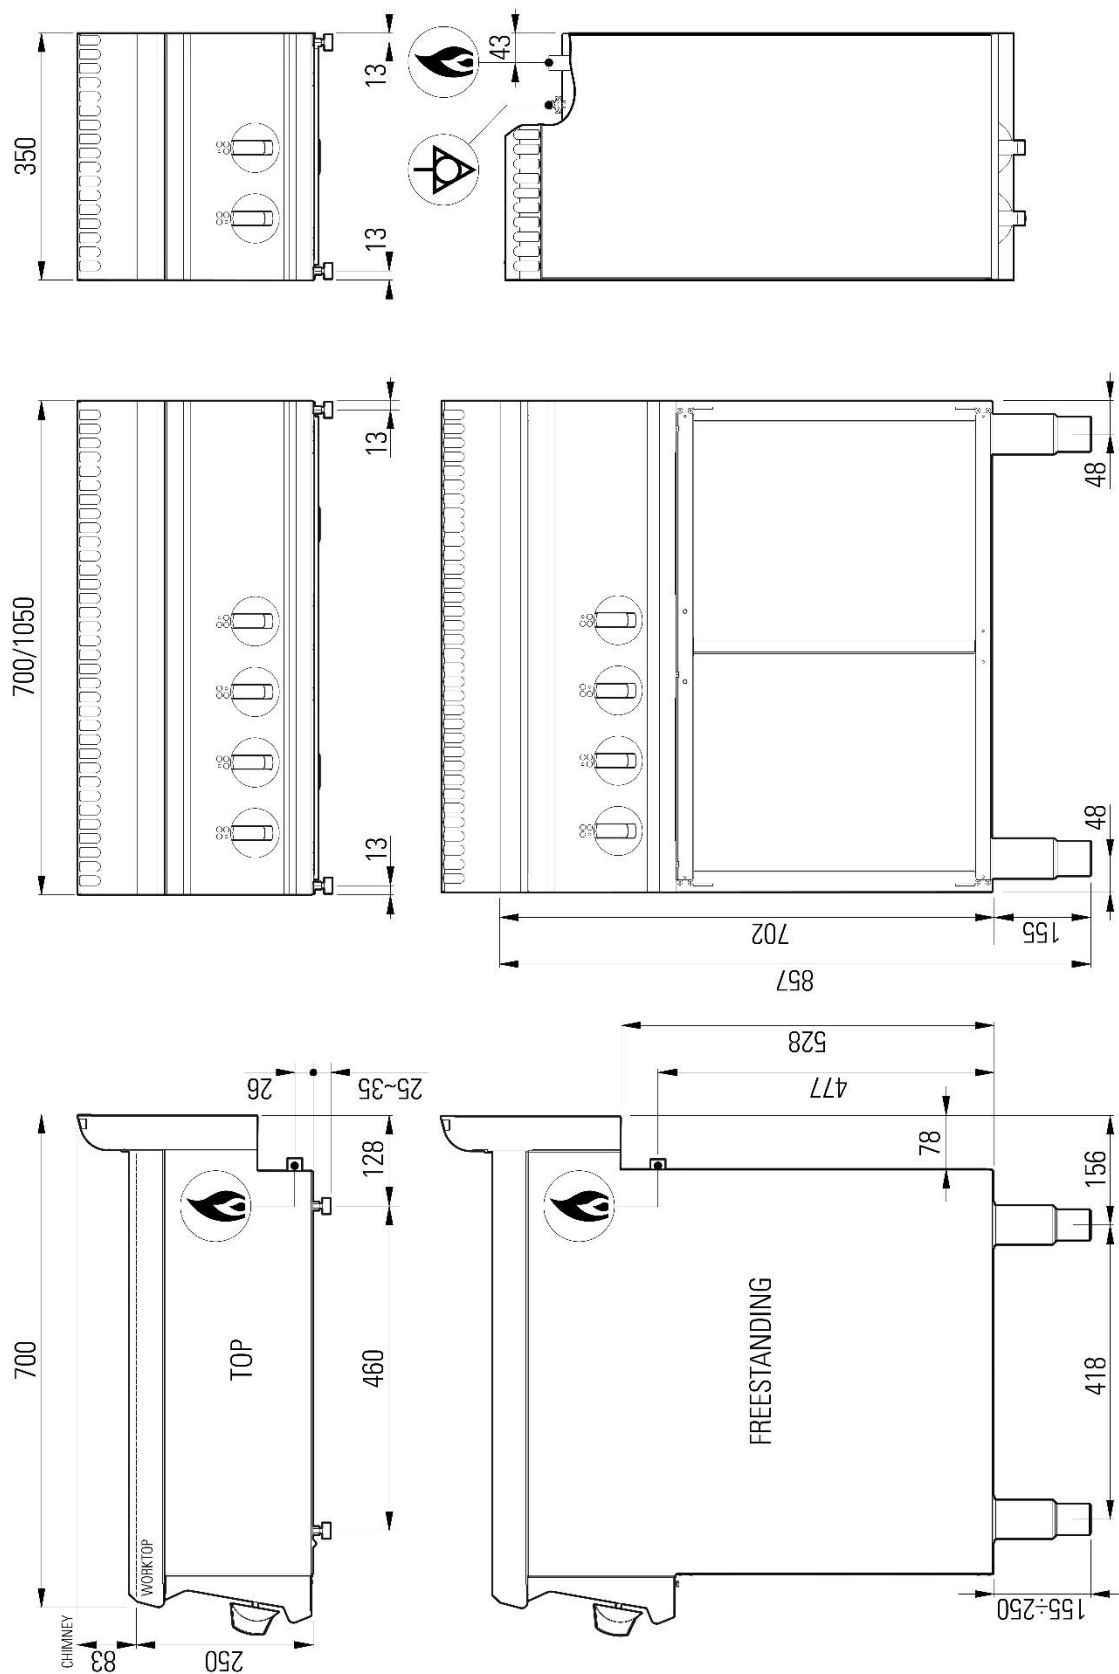


Fig.1 | Abb.1 | рис.1 - 5415.550.00