

613041

P70IG7

## FREESTANDING GAS BOILING PAN 50 L WITH INDIRECT HEATING AND AISI 316 STAINLESS STEEL TANK



- Gas indirect heat boiling pan with a 50 l tank. 70x70 cm module.
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Indirect heat boiling pans are suitable for cooking dense or gelatinous foods as well as for immersion cooking.
- AISI 304 stainless steel worktop with Scotch Brite finish.
- AISI 304 stainless steel tank walls (2 mm thick) and AISI 316 bottom (2 mm thick).
- Heating through high thermal-efficient stainless steel tubular burners.
- Jacket with pressure gauge, 0.5 bar safety valve and cap for filling distilled water.
- A valved cock supplies gas to the burner.
- Temperature control "Off-Pilot-Min-Max".
- Piezoelectric ignition.
- Pilot burner and safety thermocouple.
- Stainless steel lid with heat-resistant handle.
- Mixing tap for hot and cold water, fixed at the worktop rear.
- Chrome-plated brass tank drain tap with heat-resistant handle on front panel.
- AISI 304 height-adjustable feet (133/195 mm).
- Gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

---

**TECHNICAL DATA**


TOTAL POWER	15,5 kW	GAS POWER	15,5 kW
TANK CAPACITY	50lt	NATURAL GAS CONSUMPTION	1,64 m³/h
TANK DIMENSIONS	Ø40xh45 cm	HEATING	Indirect
TANK TYPE	AISI 316	CE GAS CERTIFICATE NUMBER	CE-0085BM0283
WATER CONNECTION POSITION	Bottom	GAS CONNECTION DIAMETER	1/2"G EN10226-1
WATER CONNECTION DIAMETER	0,393701"	IPX RATING	4
WIDTH	70 cm	DEPTH	70 cm
HEIGHT	85 cm	PACKAGE WIDTH	85 cm
PACKAGE DEPTH	92 cm	PACKAGE HEIGHT	115,0 cm
NET WEIGHT	90,6 kg	GROSS WEIGHT	110,6 kg
VOLUME	0,90 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	1.22 m³/h		

---

**ACCESSORIES**

- 220585 JOINT
- 619007 PASTA BASKET FOR 50L BOILING PAN - 3MM HOLE DIAMETER - 0.12 IN
- 619008 VEGETABLES BASKET FOR 50LT BOILING PAN -HOLES DIAMETER 5MM - 0.20INCH

## INSTALLATION SCHEMES

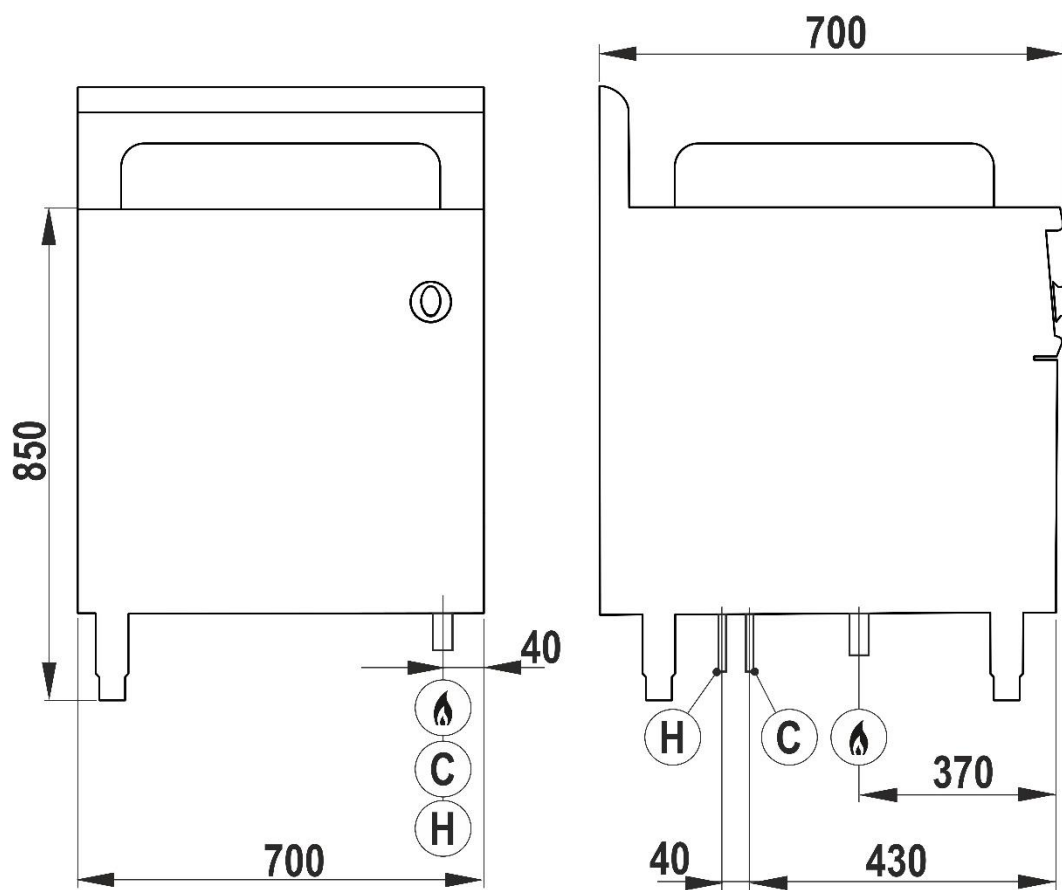

🔥: EN 10226-1 R 1/2 – EN ISO 228-1 G 1/2 (DK) Gas inlet  
⚡: Equipotential connection  
H: Hot water inlet Ø10 mm  
C: Cold water inlet Ø10 mm

Fig.1 | Abb.1 | рис.1 - 13.04.2021- 5416.390.00