

616001

GLASS CERAMIC ELECTRIC BOILING TOP WITH 2 HEATING ZONES (TOP VERSION)



- Glass ceramic electric boiling top (35 cm top version) with 2 independent cooking zones.
- Glass ceramic cook top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- Ultra-rapid infrared heating elements with a power of 1.8 kW in a single circuit and 2.5 kW in a dual circuit for each independent area.
- Energy regulator 0-6-infinite.
- Temperature limiter to prevent overheating.
- Heating commands and separated controls for each area by means of a thermostat.
- Lights warning when the heating areas are active.
- Warning lamps on the glass to enhance operator safety by signalling residual heat.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	4,3 kW	ELECTRIC POWER	4,3 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	4,3 kW	COOKING ZONE POWER	1x1,8 + 1x2,5 n°- kW
2-ZONE HEATING ELEMENTS	n° 1	NUMBER OF COOKING ZONES	n° 4
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (H)	26 mm	ELECTRICAL CONNECTION HEIGHT (X)	307 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	35 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	80 cm
PACKAGE DEPTH	42 cm	PACKAGE HEIGHT	53 cm
NET WEIGHT	13,6000 kg	GROSS WEIGHT	18,2 kg
VOLUME	0,18 m ³	HARMONISED CODE	84198180

ACCESSORIES

220585 JOINT

INSTALLATION SCHEMES

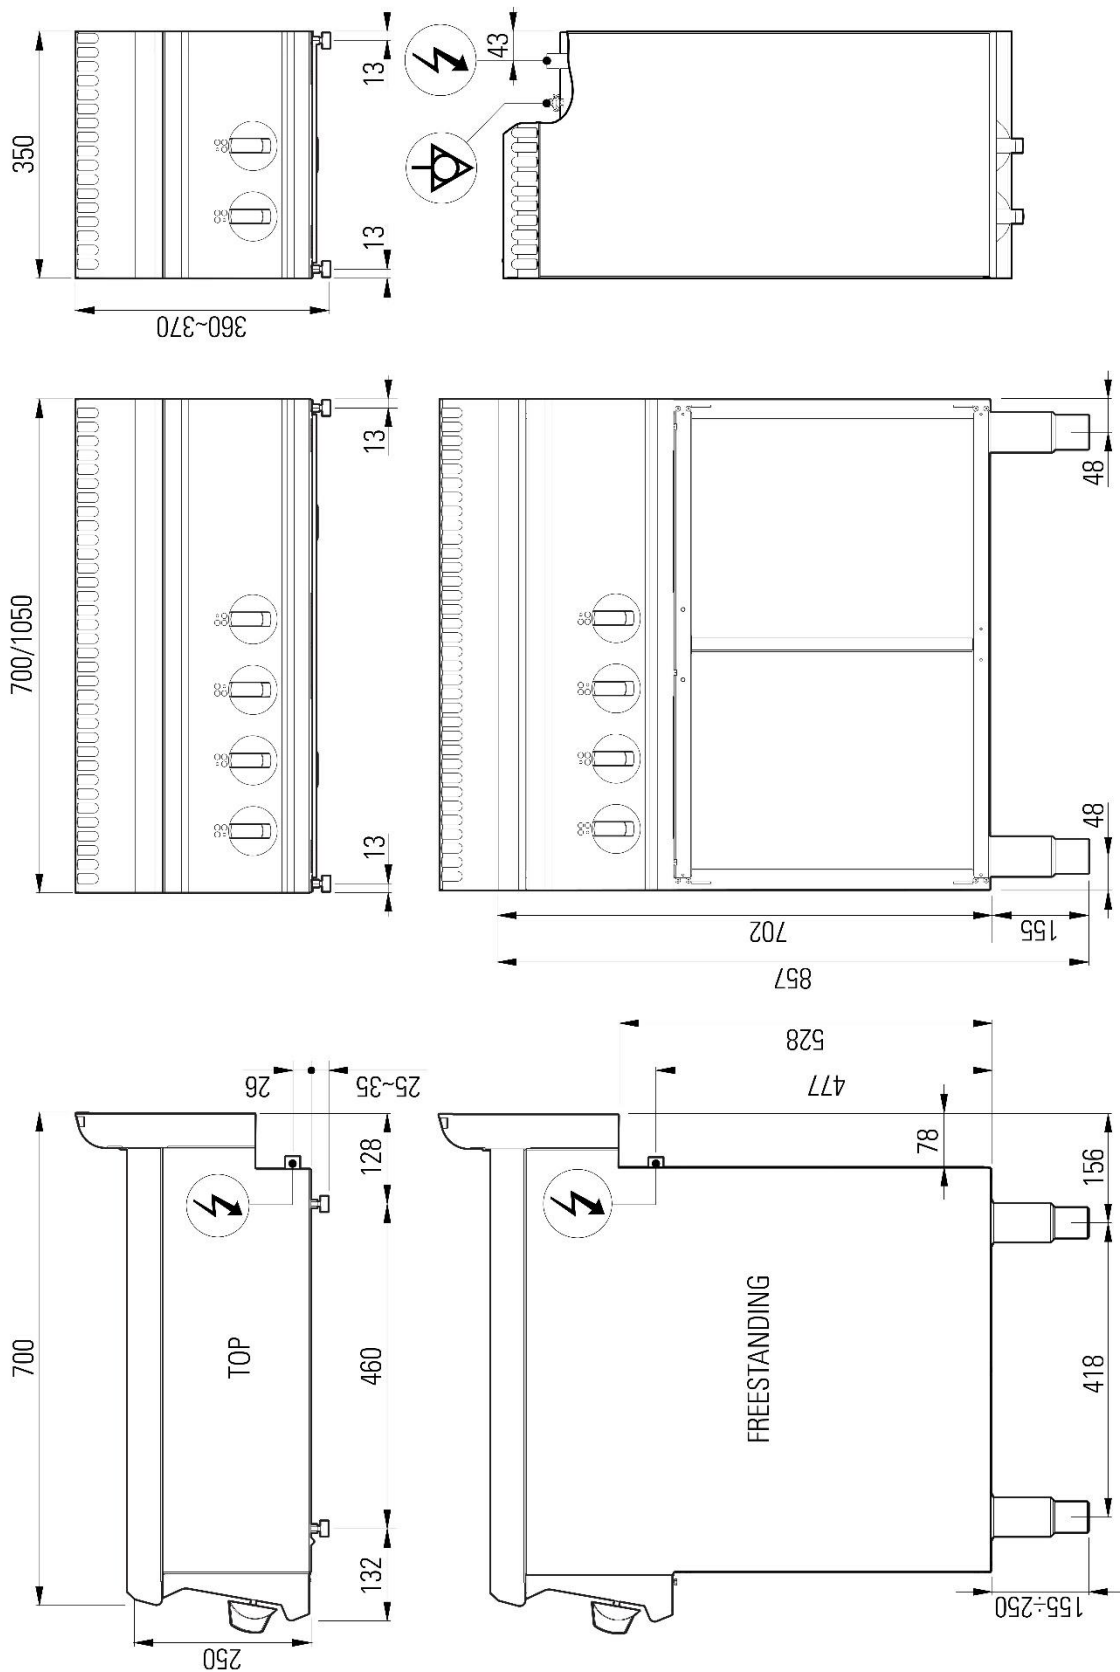


Fig.1 | Abb.1 | рис.1 - 5415.661.00