


616003

PP70E7

ELECTRIC SOLID TOP BOILING TOP (TOP VERSION)



- Electric solid top (70 cm) with 4 independent areas.
- Electric solid tops and cookers are suitable for indirect cooking only.
- Overflow-proof top with raised and welded edges.
- Non-deformable, molybdenum steel plate (15 mm thick) with prolonged heat retention properties.
- Ultra-rapid infrared heating elements secured under the 2.0 kW plate for each independent area.
- Maximum temperature of 470°C.
- Energy regulator 0-6-infinite.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating commands and thermostats for the separate control for each plate.
- Safety thermostat.
- Lights warning when the heating areas are active.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	8 kW	ELECTRIC POWER	8 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
BOILING TOP POWER	8 kW	COOKING ZONE POWER	4x2 n°- kW
ELECTRIC PLATE DIMENSIONS	64,7x56,6 cm	NUMBER OF COOKING ZONES	n° 4
PLATE TEMPERATURE RANGE	MAX 450 °C	MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	PLATE TYPE	Iron and molybdenum
HEATING ZONES	n° 4	ELECTRICAL CONNECTION HEIGHT (H)	26 mm
ELECTRICAL CONNECTION HEIGHT (X)	657 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	70 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	77,0 cm	PACKAGE DEPTH	81,0 cm
PACKAGE HEIGHT	53,0 cm	NET WEIGHT	68,6000 kg
GROSS WEIGHT	74,4 kg	VOLUME	0,3300 m ³
HARMONISED CODE	84198180		

ACCESSORIES

220585 JOINT

INSTALLATION SCHEMES

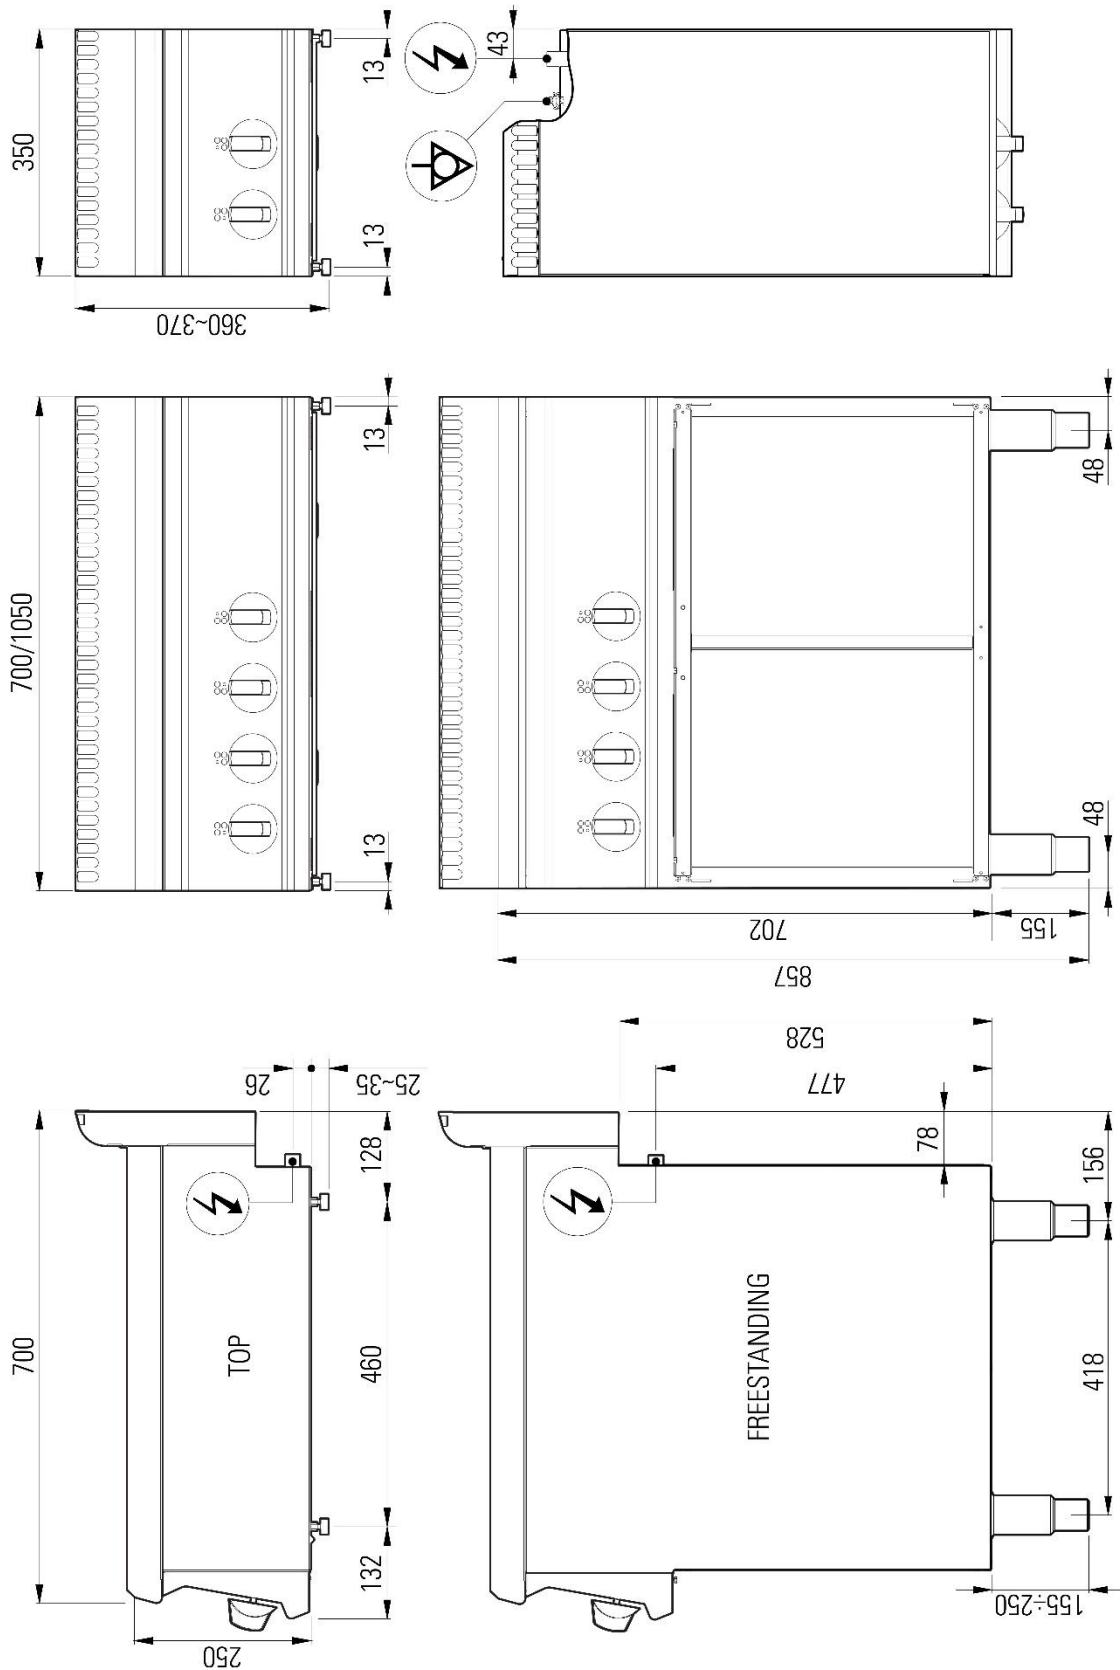


Fig.1 | Abb.1 | рис.1 - 5415.661.00