

---

**616004**


PCR35E7

**ELECTRIC BOILING TOP WITH 2 ROUND HERMETIC PLATES (DIAM. 22CM - 8.7 IN, TOP VERSION)**

---



- Electric boiling top (35 cm top version) with 2 cast-iron, round plates (22 cm diameter).
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Cast iron electric plates hermetically fixed to the deep drawn worktop.
- 2.6 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are ignited.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.



---

**TECHNICAL DATA**

TOTAL POWER	5,2 kW	ELECTRIC POWER	5,2 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	5,2 kW	COOKING ZONE POWER	2X2,6 n°- kW
ELECTRIC PLATE DIMENSIONS	Ø 22 cm	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm <sup>2</sup>	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	35 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	80 cm
PACKAGE DEPTH	41,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	14,6 kg	GROSS WEIGHT	20,0000 kg
VOLUME	0,1700 m <sup>3</sup>	HARMONISED CODE	84198180
LATENT HEAT RELEASE	416.0 W	SENSIBLE HEAT RELEASE	1040.0 W
STEAM RELEASE	613.6 g/h		

---

**ACCESSORIES**

220585 JOINT

INSTALLATION SCHEMES

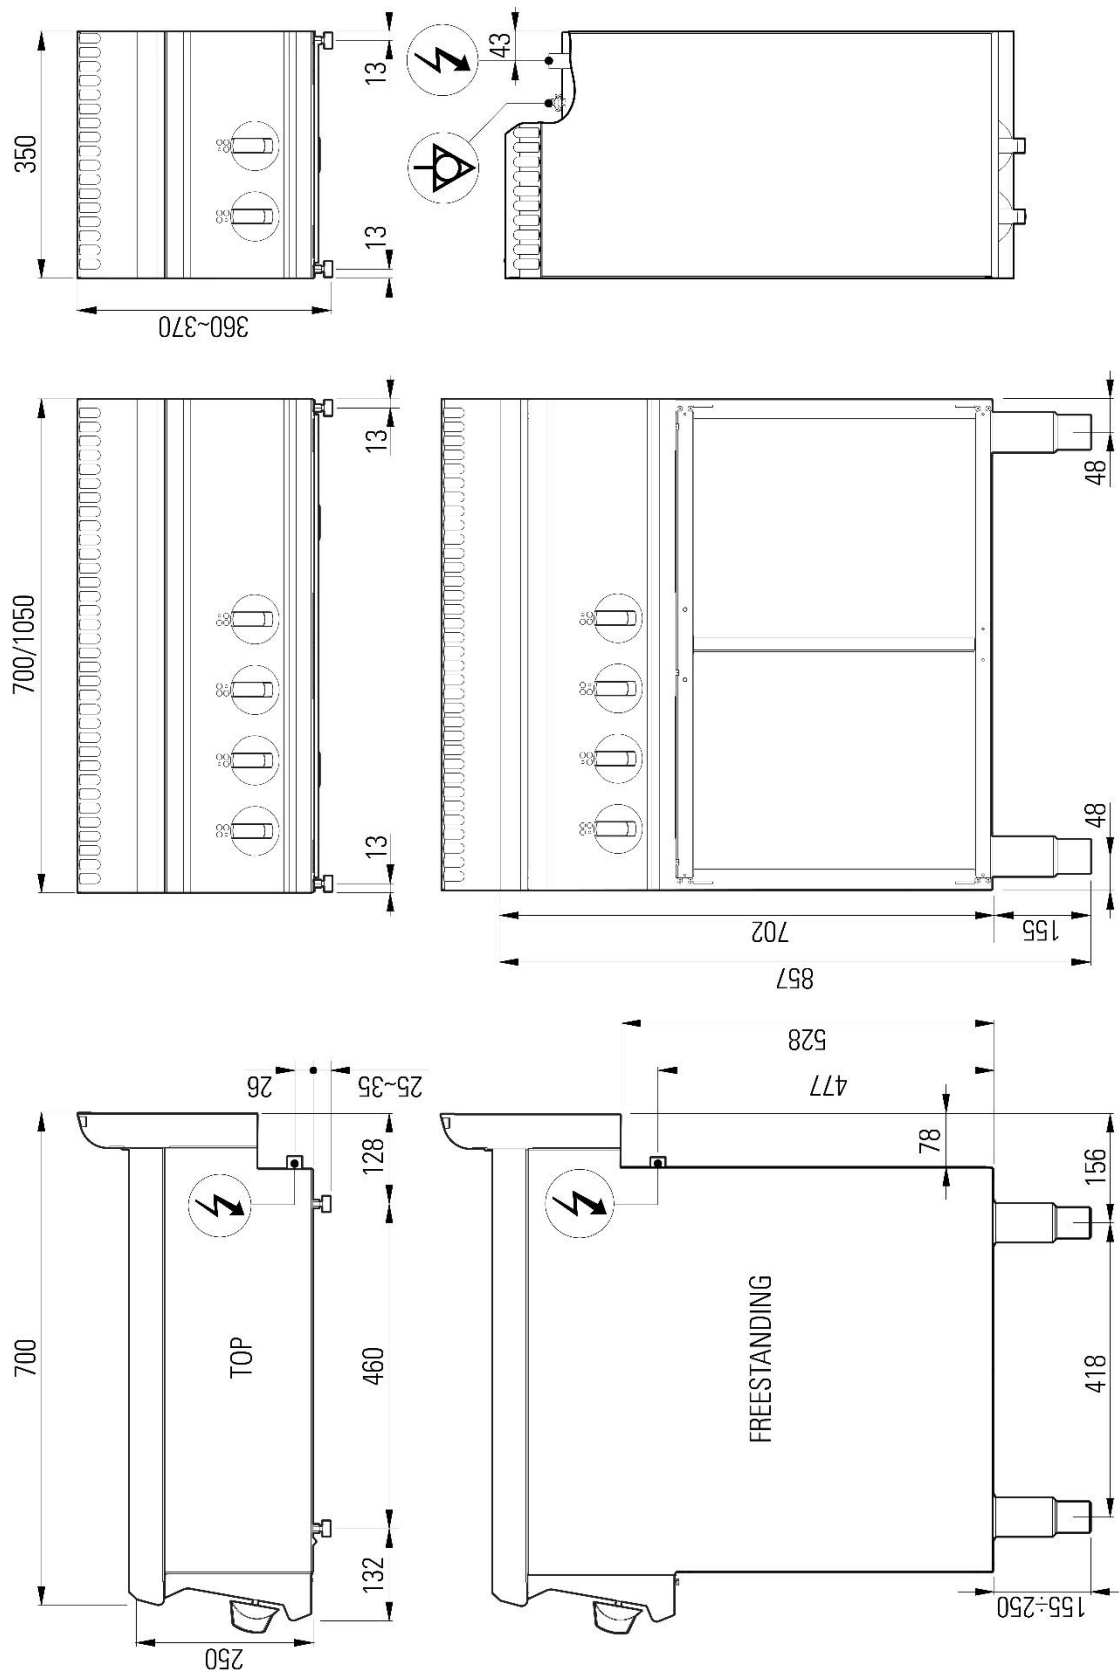


Fig.1 | Abb.1 | рис.1 - 5415.661.00