


616015

PFR70E7/1

ELECTRIC COOKER WITH 4 ROUND HERMETIC PLATES (DIAM 22 CM - 8.7 IN) ON GN2/1 ELECTRIC STATIC OVEN AND 1 GRID



- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	15,1 kW	ELECTRIC POWER	15,1 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
OVEN POWER	4,7 kW	BOILING TOP POWER	10,4 kW
COOKING ZONE POWER	4x2,6 n°- kW	TRAY CAPACITY	n° 4xGN2/1
COOKING CHAMBER DIMENSIONS	57,5x65x30 cm	OVEN DIMENSIONS	GN2/1
ELECTRIC PLATE DIMENSIONS	Ø 22 cm	GUIDES	n° 4
NUMBER OF COOKING ZONES	n° 4	VERTICAL DISTANCE BETWEEN TRAYS	6 cm
OVEN TEMPERATURE RANGE	60÷270 °C	MINIMUM POWER CABLE CROSS-SECTION	5 x 4 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	OVEN TYPE	Static
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	618 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-516 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	IPX RATING	4
WIDTH	70 cm	DEPTH	70 cm
HEIGHT	85 cm	PACKAGE WIDTH	76,0 cm
PACKAGE DEPTH	81 cm	PACKAGE HEIGHT	113 cm
NET WEIGHT	77,2 kg	GROSS WEIGHT	93,20 kg
VOLUME	0,7000 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	1208.0 W	SENSIBLE HEAT RELEASE	3020.0 W
STEAM RELEASE	1781.8 g/h		

ACCESSORIES

220585	JOINT
220590	EXTRA OVEN GRID GN2/1 (53X63CM)
619012	GN2/1 INOX TRAY

INSTALLATION SCHEMES

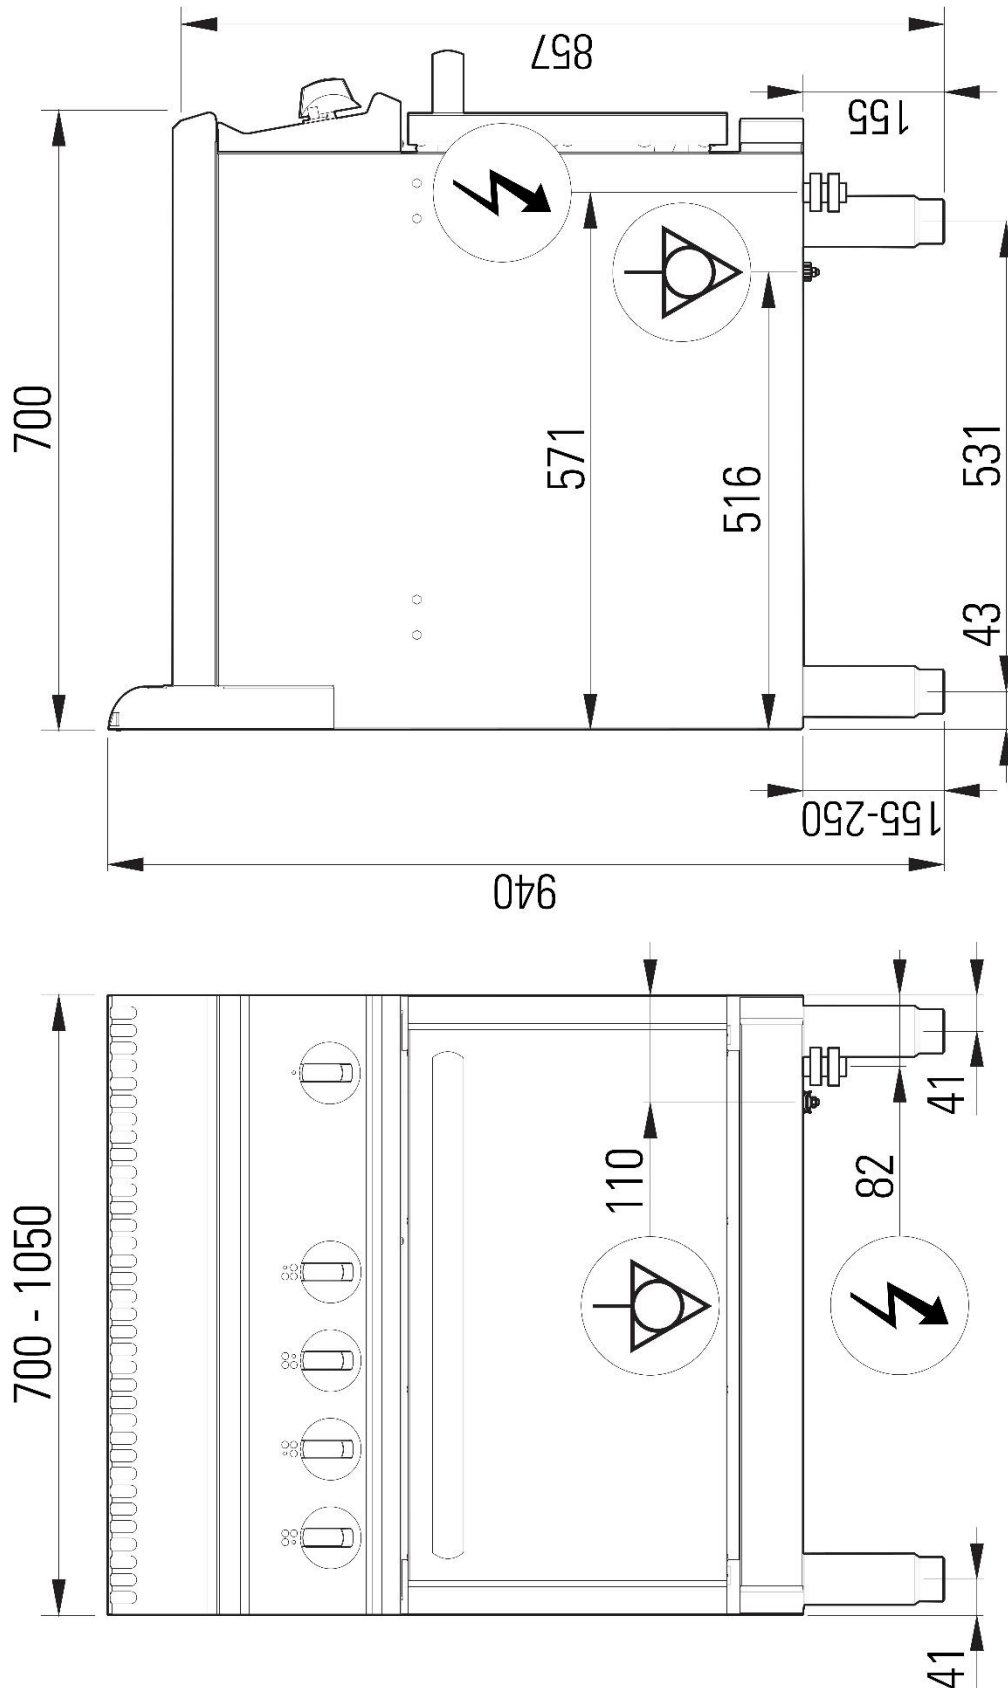


Fig.1 | Abb.1 | рис.1 - 5415.553.00