

---

**616034**

FR70E7

**DOUBLE TANK 8+8L ELECTRIC FRYER WITH IN-TANK HEAT EXCHANGERS(TOP VERSION) - BASKETS AND LIDS INCLUDED**

---



- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Operating thermostat ranging between 100°C and 190°C below oil smoke point.
- Bulb thermostats immersed in oil are more efficient in sensing the temperature inside the tank, promptly adjusting the oil to the desired temperature, minimising smoke points, and prolonging the oil life.
- A safety thermostat triggers in case of abnormal operation.
- Green light indicating voltage presence.
- Orange light indicating that the heating elements are heating up.
- Technical compartment for easy connection to the electrical network.

## TECHNICAL DATA

TOTAL POWER	12 kW	ELECTRIC POWER	12 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
TEMPERATURE RANGE	100÷190 °C	TANK CAPACITY	8lt+8lt
TANK DIMENSIONS	22,7x34x22,5 cm	HEATING	Heating elements in the tank
MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm <sup>2</sup>	ELECTRIC CABLE TYPE	H07 RN-F
TANK TYPE	AISI 304	TANKS	n° 2
ELECTRICAL CONNECTION HEIGHT (H)	25 mm	ELECTRICAL CONNECTION HEIGHT (X)	657 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	70 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	77,0 cm
PACKAGE DEPTH	81,0 cm	PACKAGE HEIGHT	53,0 cm
NET WEIGHT	30,4 kg	GROSS WEIGHT	37,8 kg
VOLUME	0,3300 m <sup>3</sup>	HARMONISED CODE	84198180
LATENT HEAT RELEASE	8400.0 W	SENSIBLE HEAT RELEASE	1080.0 W
STEAM RELEASE	12360.0 g/h		

## ACCESSORIES

120575	EXTRA FRYER BASKET (8L) - DIM. CM (21X26.5X10.5H)
120690	2 EXTRA FRYER BASKETS (8L) - DIM. CM (10.5X26.5X10.5H)
220585	JOINT

INSTALLATION SCHEMES

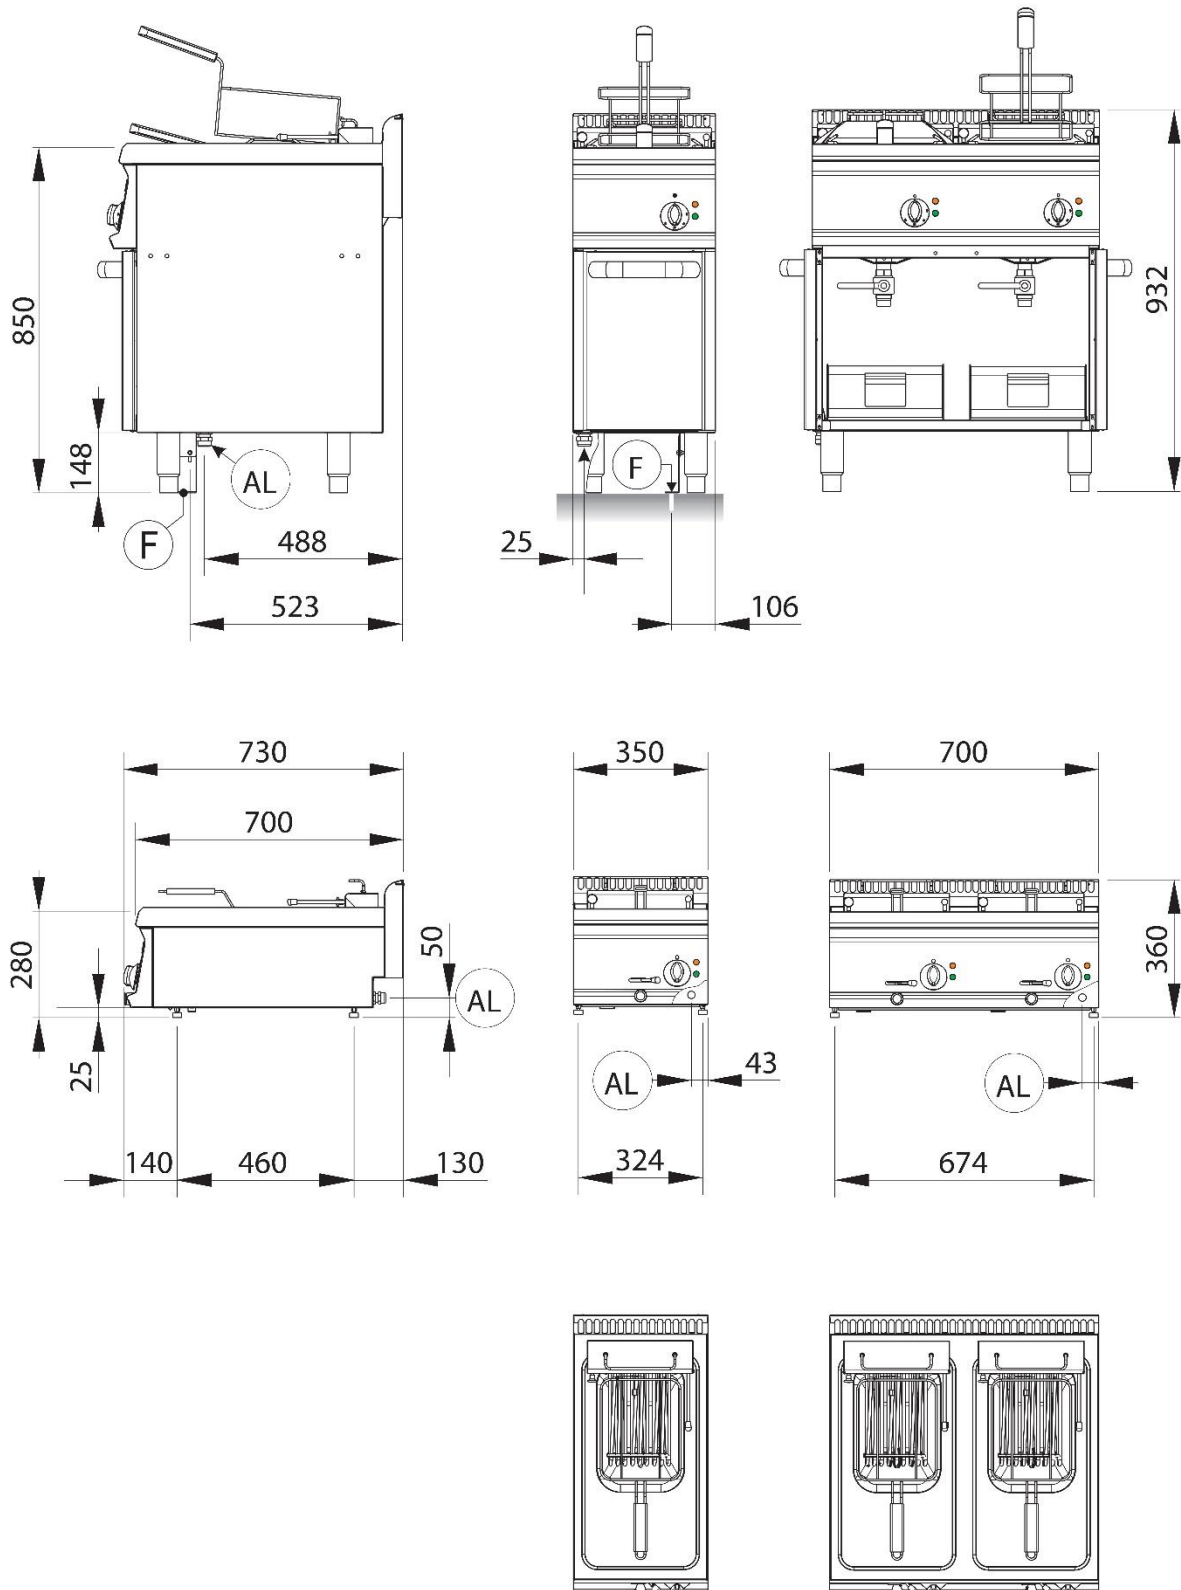


Fig.1 | Abb.1 | рис.1 - 5415.664.00