

616049

P70IE7

FREESTANDING ELECTRIC BOILING PAN 50L WITH INDIRECT HEATING AND AISI 316 STAINLESS STEEL TANK



- Electric indirect heat boiling pan with a 50 l tank. 70x70 cm module.
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Indirect heat boiling pans are suitable for cooking dense or gelatinous foods as well as for immersion cooking.
- AISI 304 stainless steel worktop with Scotch Brite finish.
- AISI 304 stainless steel tank walls (2 mm thick) and AISI 316 bottom (2 mm thick).
- Heating through armoured heating elements in Incoloy alloy inside the jacket.
- Jacket with pressure gauge, 0.5 bar safety valve and cap for filling distilled water.
- The appliance is fitted with a three-position selector switch: position 0: Off; position 1: Power reduced by 50%; position 2: Maximum power (100%).
- Operating thermostat that adjusts the temperature inside the cooking tank 0-40-60-80-100°C.
- Green light indicating voltage presence.
- Orange light indicating that the heating elements are heating up.
- Safety thermostat automatically stops operation in the presence of a fault.
- Stainless steel lid with heat-resistant handle.
- Mixing tap for hot and cold water, fixed at the worktop rear.
- Chrome-plated brass tank drain tap with heat-resistant handle on front panel.
- AISI 304 height-adjustable feet (133/195 mm).


TECHNICAL DATA

TOTAL POWER	9 kW	ELECTRIC POWER	9 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
TANK CAPACITY	50lt	TANK DIMENSIONS	Ø40xh45 cm
HEATING	Indirect	MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	TANK TYPE	AISI 316
WATER CONNECTION POSITION	Bottom	WATER CONNECTION DIAMETER	0,393701"
IPX RATING	4	WIDTH	70 cm
DEPTH	70 cm	HEIGHT	85 cm
PACKAGE WIDTH	96,0 cm	PACKAGE DEPTH	87,0 cm
PACKAGE HEIGHT	115,0 cm	NET WEIGHT	84,0000 kg
GROSS WEIGHT	104,0000 kg	VOLUME	0,9600 m ³
HARMONISED CODE	84198180		

ACCESSORIES

220585	JOINT
619007	PASTA BASKET FOR 50L BOILING PAN - 3MM HOLE DIAMETER - 0.12 IN
619008	VEGETABLES BASKET FOR 50LT BOILING PAN -HOLES DIAMETER 5MM - 0.20INCH

INSTALLATION SCHEMES

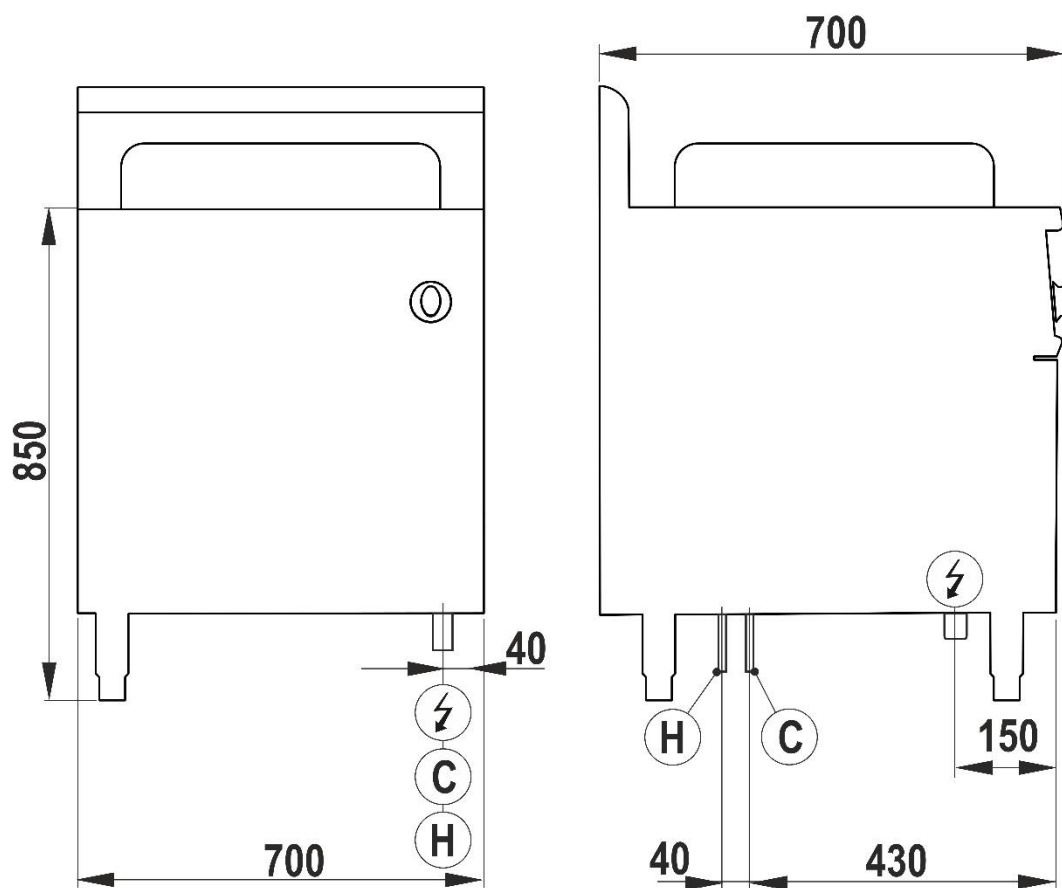

⚡: Electric inlet connection
H: Hot water inlet Ø10 mm
C: Cold water inlet Ø10 mm

Fig.1 | Abb.1 | рис.1 - 13.04.2021 - 5415.668.00