
616092

PCU35FE7

**FREESTANDING ELECTRIC BOILING TOP WITH 2
SQUARED COPLANAR PLATES (30X30 CM -
11.8X11.8 IN) ON OPEN CABINET**



- Freestanding boiling top with 2 coplanar, fixed electric plates on an open cabinet (35 cm).
- Coplanar, squared, cast iron electric plates (30x30 cm and 6 mm thick) not hermetically sealed to the boiling top.
- 2.5 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are ignited.
- Cooking residue collecting drawer.
- AISI 304 stainless steel height-adjustable feet (133/195 mm)
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.

TECHNICAL DATA

TOTAL POWER	5 kW	ELECTRIC POWER	5 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	5 kW	COOKING ZONE POWER	2X2,5 n°- kW
ELECTRIC PLATE DIMENSIONS	30x30 cm	CABINET DIMENSIONS	34,5x57x40 cm
NUMBER OF COOKING ZONES	n° 2	MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²
ELECTRIC CABLE TYPE	H07 RN-F	ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
IPX RATING	4	WIDTH	35 cm
DEPTH	70 cm	HEIGHT	85 cm
PACKAGE WIDTH	81,0 cm	PACKAGE DEPTH	47,0 cm
PACKAGE HEIGHT	115 cm	NET WEIGHT	47 kg
GROSS WEIGHT	59 kg	VOLUME	0,43 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	400.0 W
SENSIBLE HEAT RELEASE	1000.0 W	STEAM RELEASE	590.0 g/h

ACCESSORIES

220722 COVERING PANEL FOR FREESTANDING ELEMENTS (50MM)
 619009 RH/LH STAINLESS STEEL DOOR FOR BASES

INSTALLATION SCHEMES

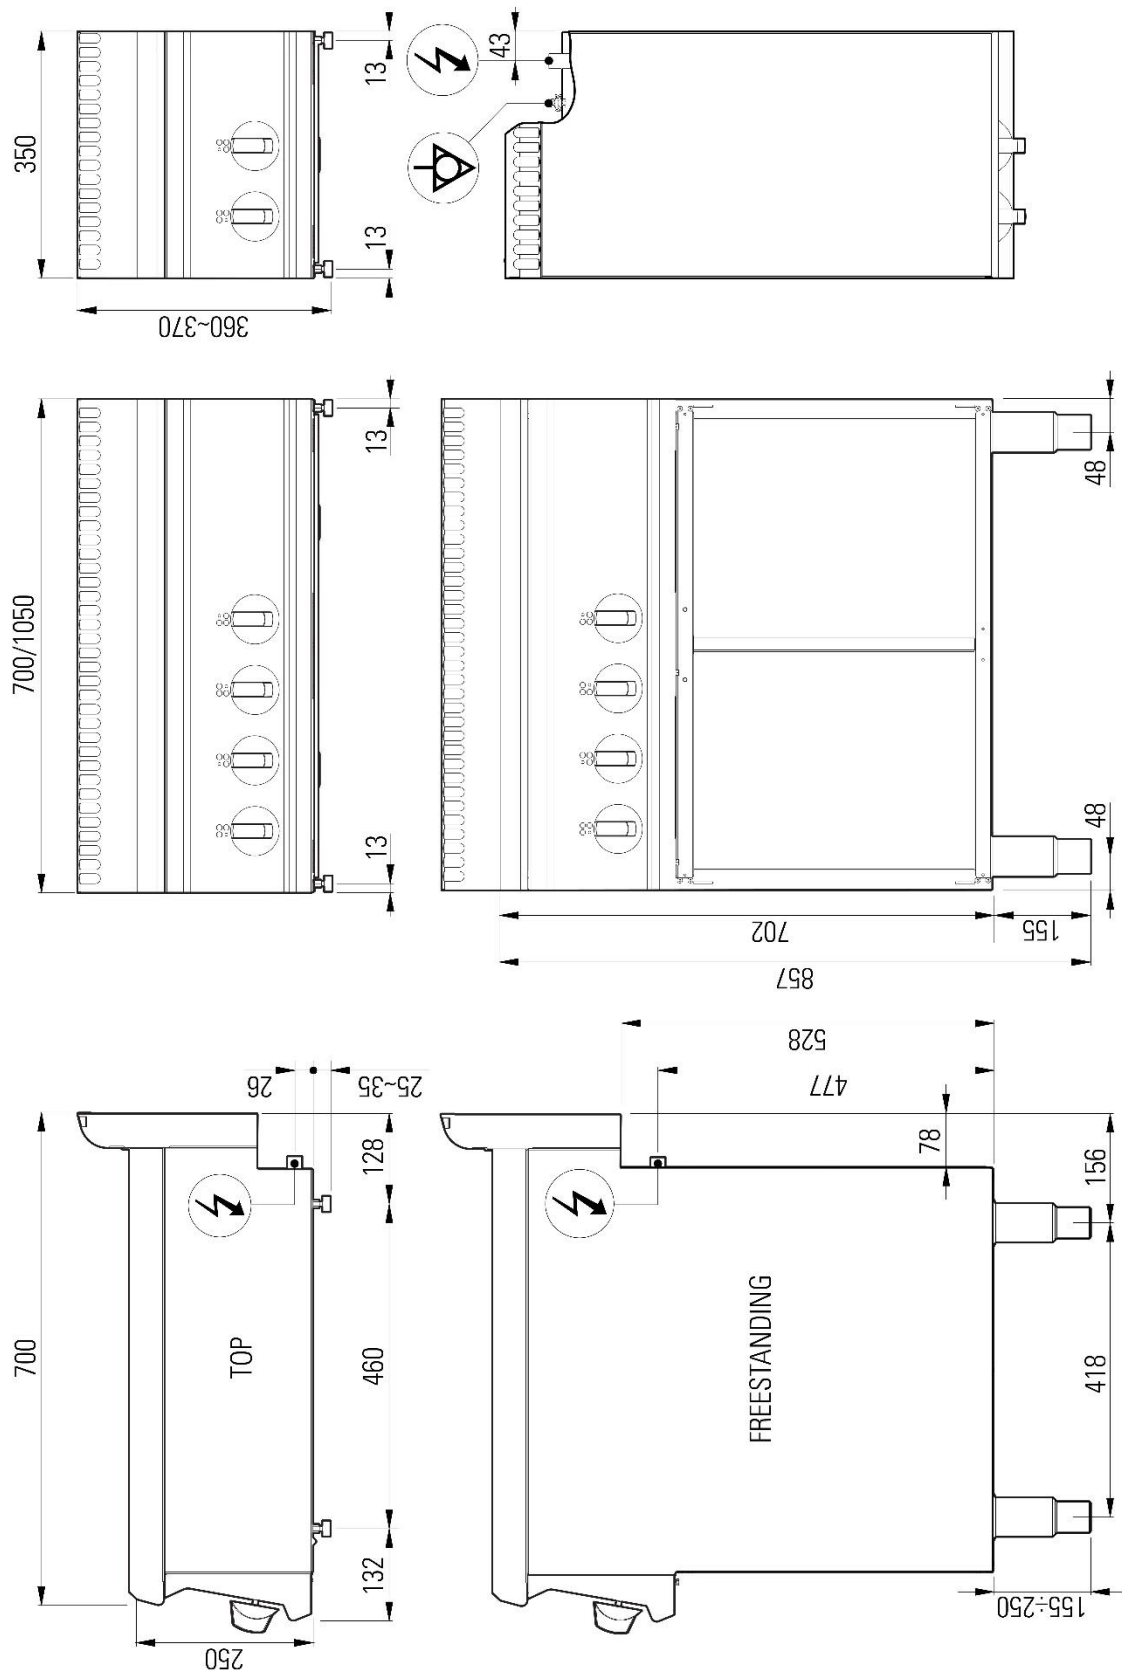


Fig.1 | Abb.1 | рис.1 - 5415.661.00