
616093

PCU70FE7

FREESTANDING ELECTRIC BOILING TOP WITH 4 SQUARED COPLANAR PLATES (30X30 CM - 11.8X11.8 IN) ON OPEN CABINET



- Freestanding boiling top with 4 coplanar, fixed electric plates on an open cabinet (70 cm).
- Coplanar, squared, cast iron electric plates (30x30 cm and 6 mm thick) not hermetically sealed to the boiling top.
- 2.5 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are ignited.
- Cooking residue collecting drawer.
- AISI 304 stainless steel height-adjustable feet (133/195 mm)
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.

TECHNICAL DATA

TOTAL POWER	10 kW	ELECTRIC POWER	10 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
BOILING TOP POWER	10 kW	COOKING ZONE POWER	4X2,5 n°- kW
ELECTRIC PLATE DIMENSIONS	30x30 cm	NUMBER OF COOKING ZONES	n° 4
MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	IPX RATING	4
WIDTH	70 cm	DEPTH	70 cm
HEIGHT	85 cm	PACKAGE WIDTH	76,0 cm
PACKAGE DEPTH	80,0 cm	PACKAGE HEIGHT	114,0 cm
NET WEIGHT	83 kg	GROSS WEIGHT	99 kg
VOLUME	0,69 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	800.0 W	SENSIBLE HEAT RELEASE	2000.0 W
STEAM RELEASE	1180.0 g/h		

ACCESSORIES

- 220722 COVERING PANEL FOR FREESTANDING ELEMENTS (50MM)
 619009 RH/LH STAINLESS STEEL DOOR FOR BASES

INSTALLATION SCHEMES

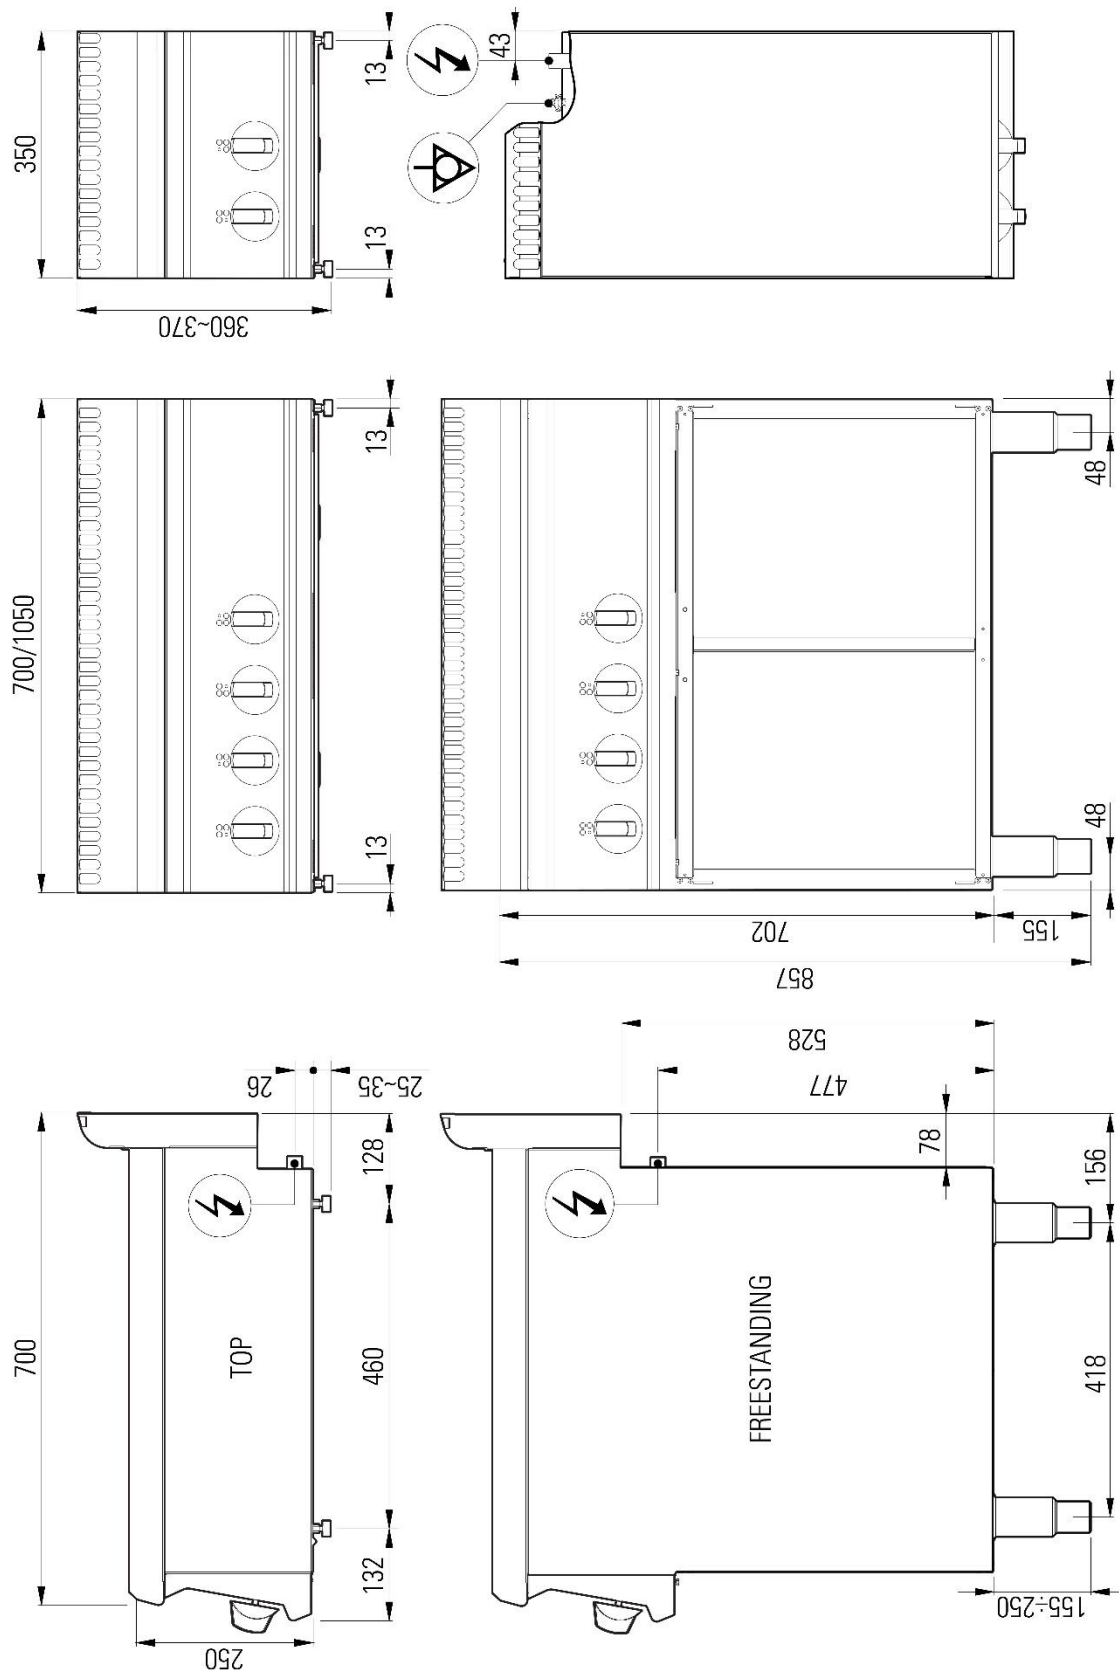


Fig.1 | Abb.1 | рис.1 - 5415.661.00