

616112

PIN70E7N

4-ZONE INDUCTION BOILING TOP (TOP VERSION)



- Induction cook top (70 cm top version) with 4 independent cooking zones
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Glass ceramic boiling top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 3.5 kW independent cooking zones each.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other cook top types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED lights for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction boiling pans with a base diameter ranging between 12 cm and 28 cm.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Technical compartment for easy connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	14 kW	ELECTRIC POWER	14 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3 ~ V
COOKING ZONE POWER	4x3,5 n°- kW	NUMBER OF COOKING ZONES	n° 4
MINIMUM POWER CABLE CROSS-SECTION	4 x 4 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
MAXIMUM RELATIVE AIR HUMIDITY	30-90 %	ELECTRICAL CONNECTION HEIGHT (H)	26 mm
ELECTRICAL CONNECTION HEIGHT (X)	657 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	3	WIDTH	70 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	77,0 cm	PACKAGE DEPTH	81,0 cm
PACKAGE HEIGHT	53,0 cm	NET WEIGHT	44 kg
GROSS WEIGHT	51,4 kg	VOLUME	0,3300 m ³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	392.0 W
SENSIBLE HEAT RELEASE	980.0 W	STEAM RELEASE	574.0 g/h

ACCESSORIES

220585 JOINT

INSTALLATION SCHEMES

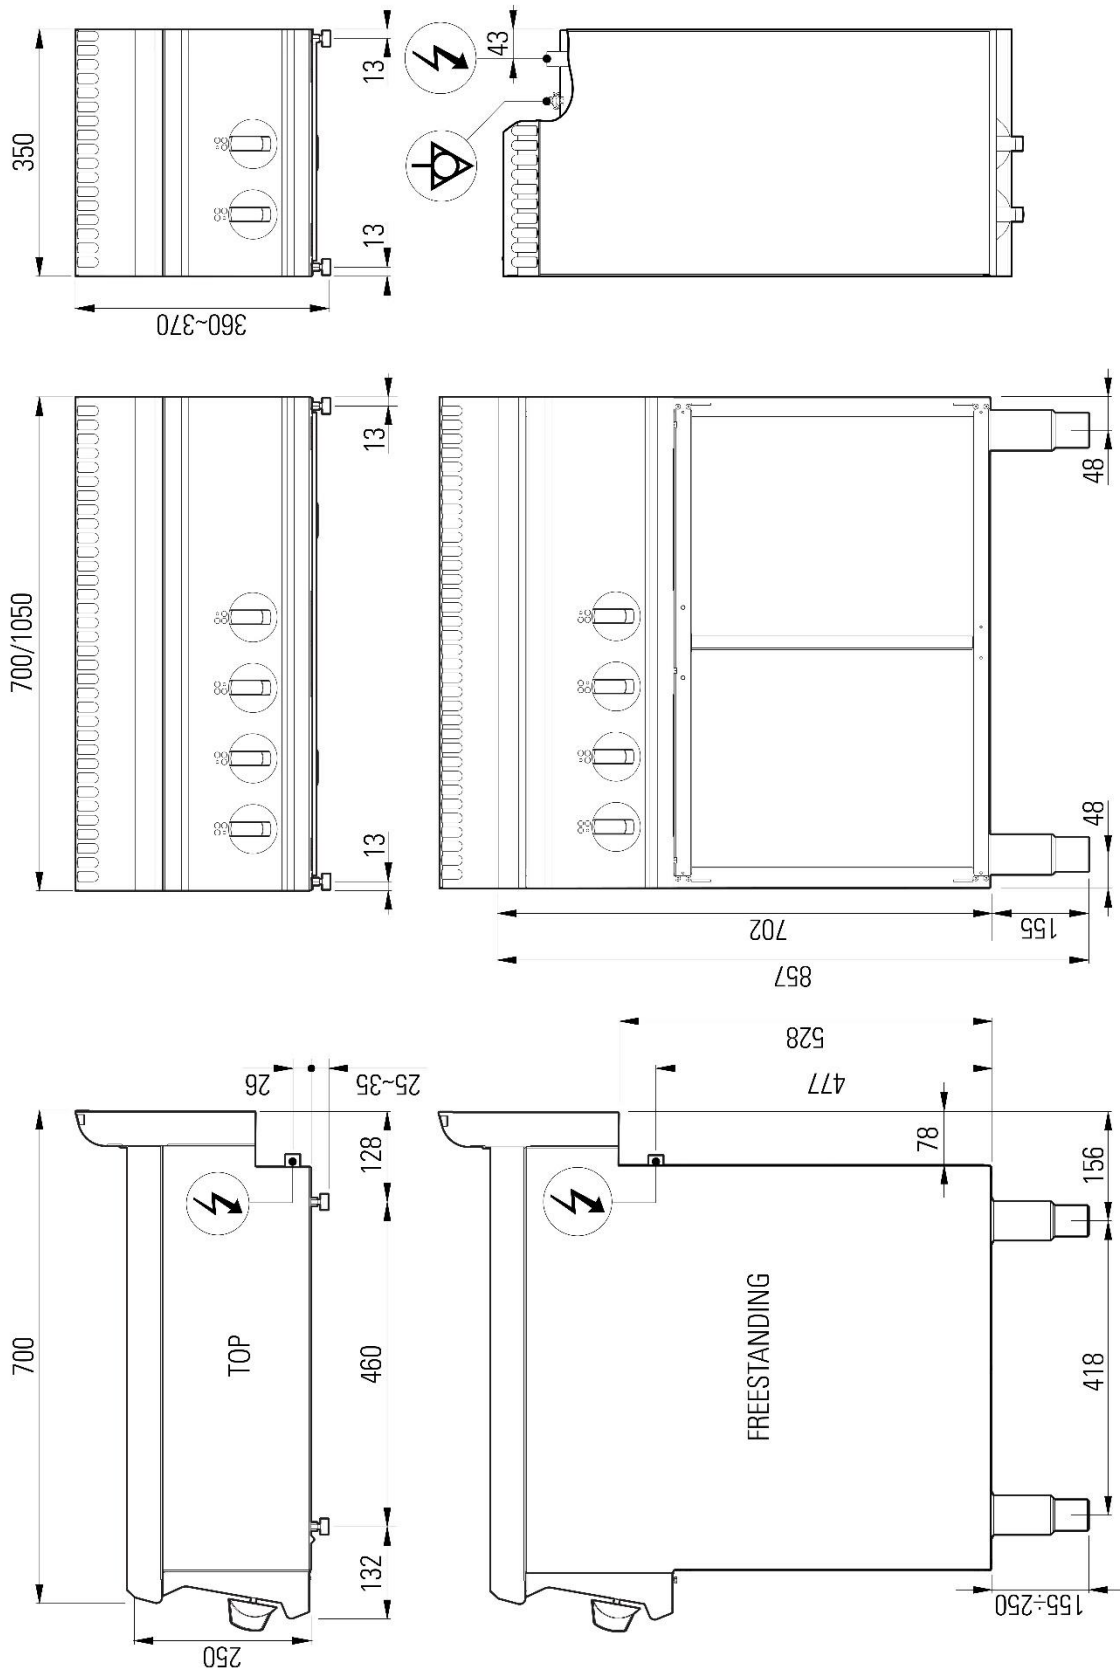


Fig.1 | Abb.1 | рис.1 - 5415.661.00