


713007

PCPG12G7

4-BURNER GAS BOILING TOP WITH CAST IRON GRIDS AND HEATING PLATE (TOP VERSION)



- Gas solid top (40 cm) and 2 modules with 2 open burners (40 cm each), top version.
- Non-deformable cast iron plate (1 cm thick).
- Cast iron central burner (4.5 kW) to reach a temperature of 400°C at the plate centre, with pilot burner and safety thermocouple.
- Valved gas cock.
- Gas boiling top Hob with single-ring cast iron burners (3.3 kW) and double-ring burners (7.2 kW); ignition of the main burners through a pilot burner equipped with a safety thermocouple and pan support grids with enamelled cast iron grates to be resistant to acids, alkalis, and flames. enamelled cast iron pan support grids to resist acids, acids, alkalis and flames.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.

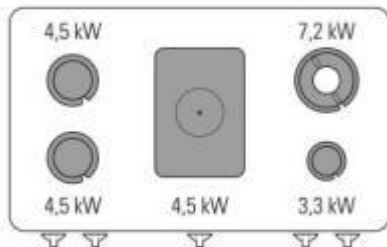

TECHNICAL DATA

TOTAL POWER	22.8 kW	GAS POWER	22.8 kW
OPEN BURNER POWER	1x7,2+1x3,3+2x4,5 n°- kW	BOILING TOP POWER	24 kW
GAS PLATE POWER	1x4,5 n°- kW	NATURAL GAS CONSUMPTION	2,53 m³/h
ELECTRIC PLATE DIMENSIONS	30,9x55,4 cm	NUMBER OF BURNERS	n° 4 + 1 (plate)
BOILING PAN SUPPORT	RAAF enamelled cast iron	PLATE TYPE	Cast iron
HEATING ZONES	n° 1	CE GAS CERTIFICATE NUMBER	CE-0085BO0091
GAS CONNECTION DIAMETER	3/4"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	1166 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	120 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	127,0 cm	PACKAGE DEPTH	81,0 cm
PACKAGE HEIGHT	54,0 cm	NET WEIGHT	83,0000 kg
GROSS WEIGHT	93,0000 kg	VOLUME	0,5500 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	1.8 m³/h
LATENT HEAT RELEASE	2736.0 W	SENSIBLE HEAT RELEASE	6840.0 W
STEAM RELEASE	4012.8 g/h		

ACCESSORIES

799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

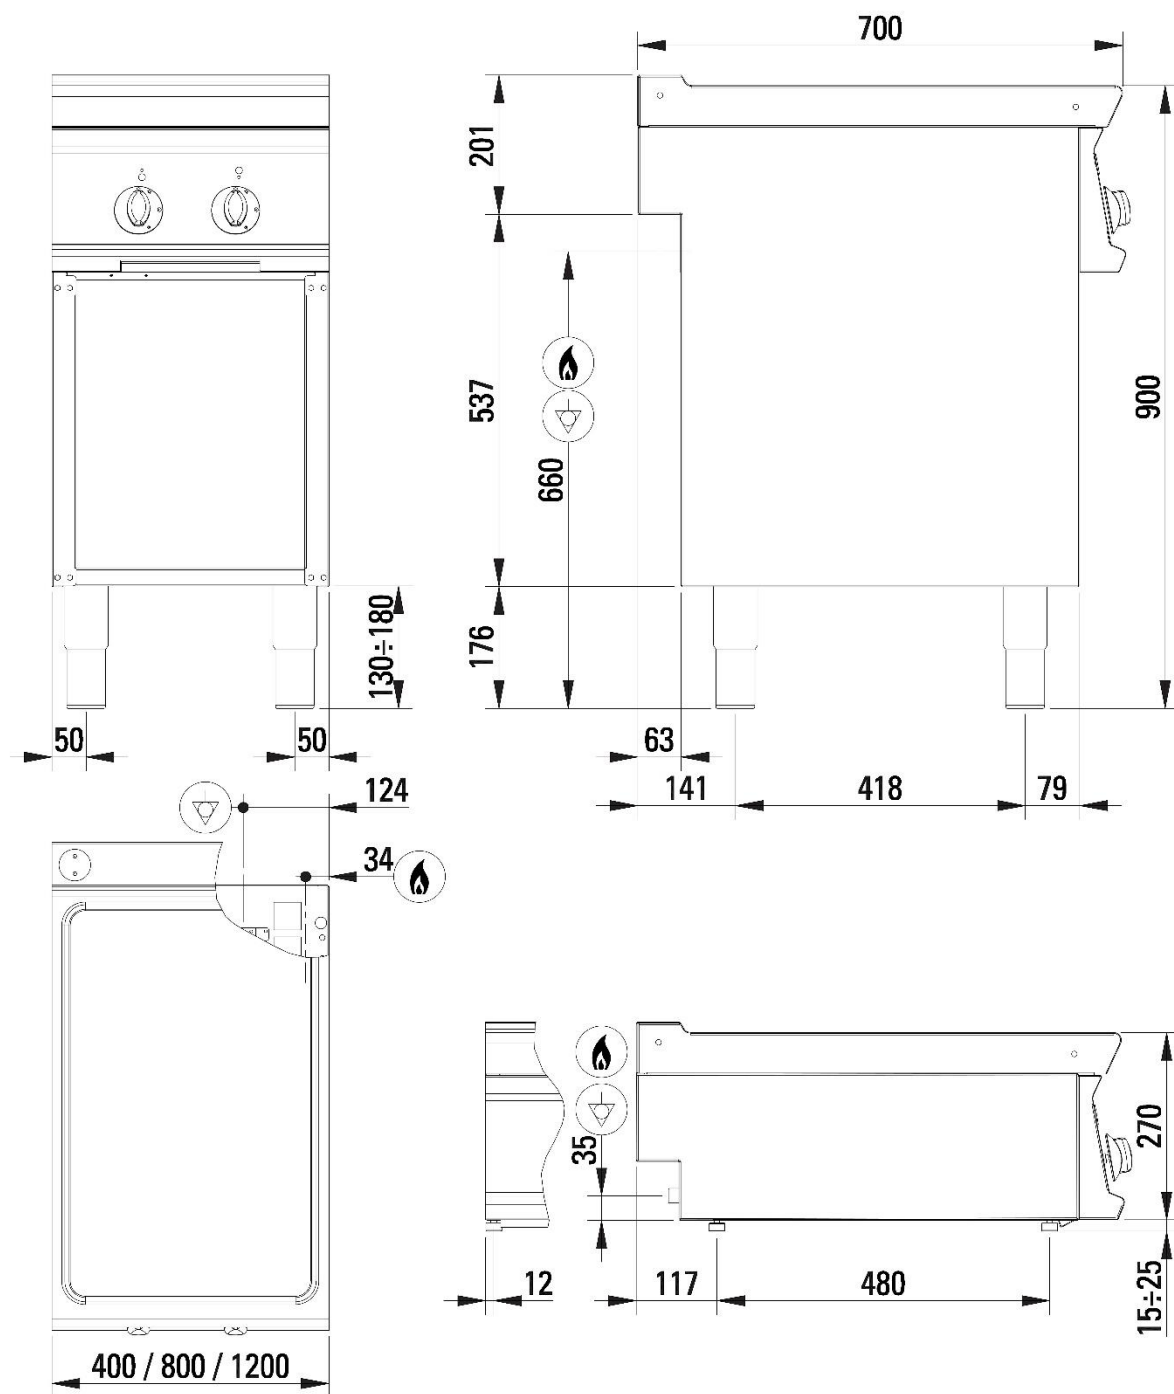


Fig.1 | Abb.1 | рис.1 - 5415.649.00