

713008**PC4G7****2-BURNER GAS BOILING TOP (TOP VERSION)**



- 2-burner gas boiling top (40 cm).
- High-efficiency cast iron burners and flame spreaders with a single ring (3.3 kW) and double ring (7.2 kW).
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition via pilot burner with safety thermocouple.
- Valved gas cock.
- Setup for installing a water tap.
- AISI304 dual-flame round rod pan support grid (10 mm diameter).
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	10,5 kW	GAS POWER	10,5 kW
OPEN BURNER POWER	1x3,3 + 1x7,2 n°- kW	BOILING TOP POWER	10,5 kW
NATURAL GAS CONSUMPTION	1,11 m³/h	NUMBER OF BURNERS	n° 2
BOILING PAN SUPPORT	Tondino inox	CE GAS CERTIFICATE NUMBER	CE-0085B00091
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	366 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	81,0 cm
PACKAGE DEPTH	47,0 cm	PACKAGE HEIGHT	54,0 cm
NET WEIGHT	23,0000 kg	GROSS WEIGHT	30,0000 kg
VOLUME	0,2000 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	0.83 m³/h	LATENT HEAT RELEASE	1260.0 W
SENSIBLE HEAT RELEASE	3150.0 W	STEAM RELEASE	1848.0 g/h

ACCESSORIES

799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

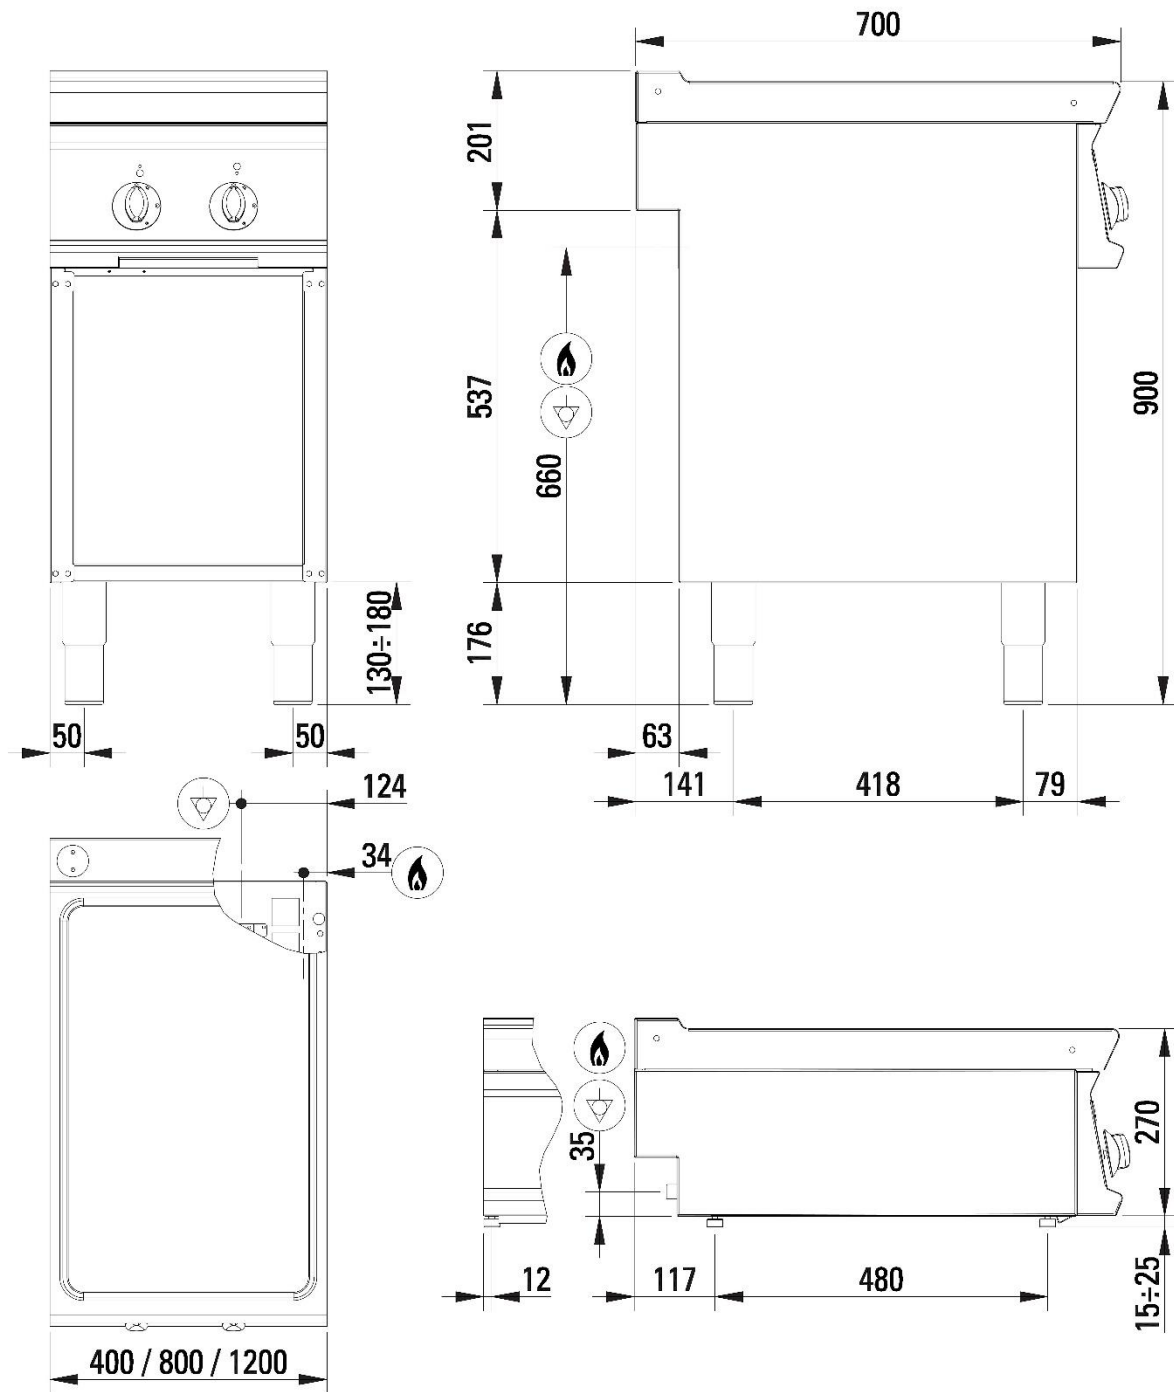


Fig.1 | Abb.1 | рис.1 - 5415.649.00