

713011**PC8SG7****SUPER 4-BURNER GAS BOILING TOP (TOP VERSION)**



- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.



TECHNICAL DATA

TOTAL POWER	28,8 kW	GAS POWER	28,8 kW
OPEN BURNER POWER	4x7,2 n°- kW	BOILING TOP POWER	28,8 kW
NATURAL GAS CONSUMPTION	3,04 m³/h	NUMBER OF BURNERS	n° 4
BOILING PAN SUPPORT	Tondino inox	CE GAS CERTIFICATE NUMBER	CE-0085B00091
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	766 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	80 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	87,0 cm
PACKAGE DEPTH	81,0 cm	PACKAGE HEIGHT	56 cm
NET WEIGHT	44 kg	GROSS WEIGHT	54,5 kg
VOLUME	0,39 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	2.27 m³/h	LATENT HEAT RELEASE	3456.0 W
SENSIBLE HEAT RELEASE	8640.0 W	STEAM RELEASE	5068.8 g/h

ACCESSORIES

799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

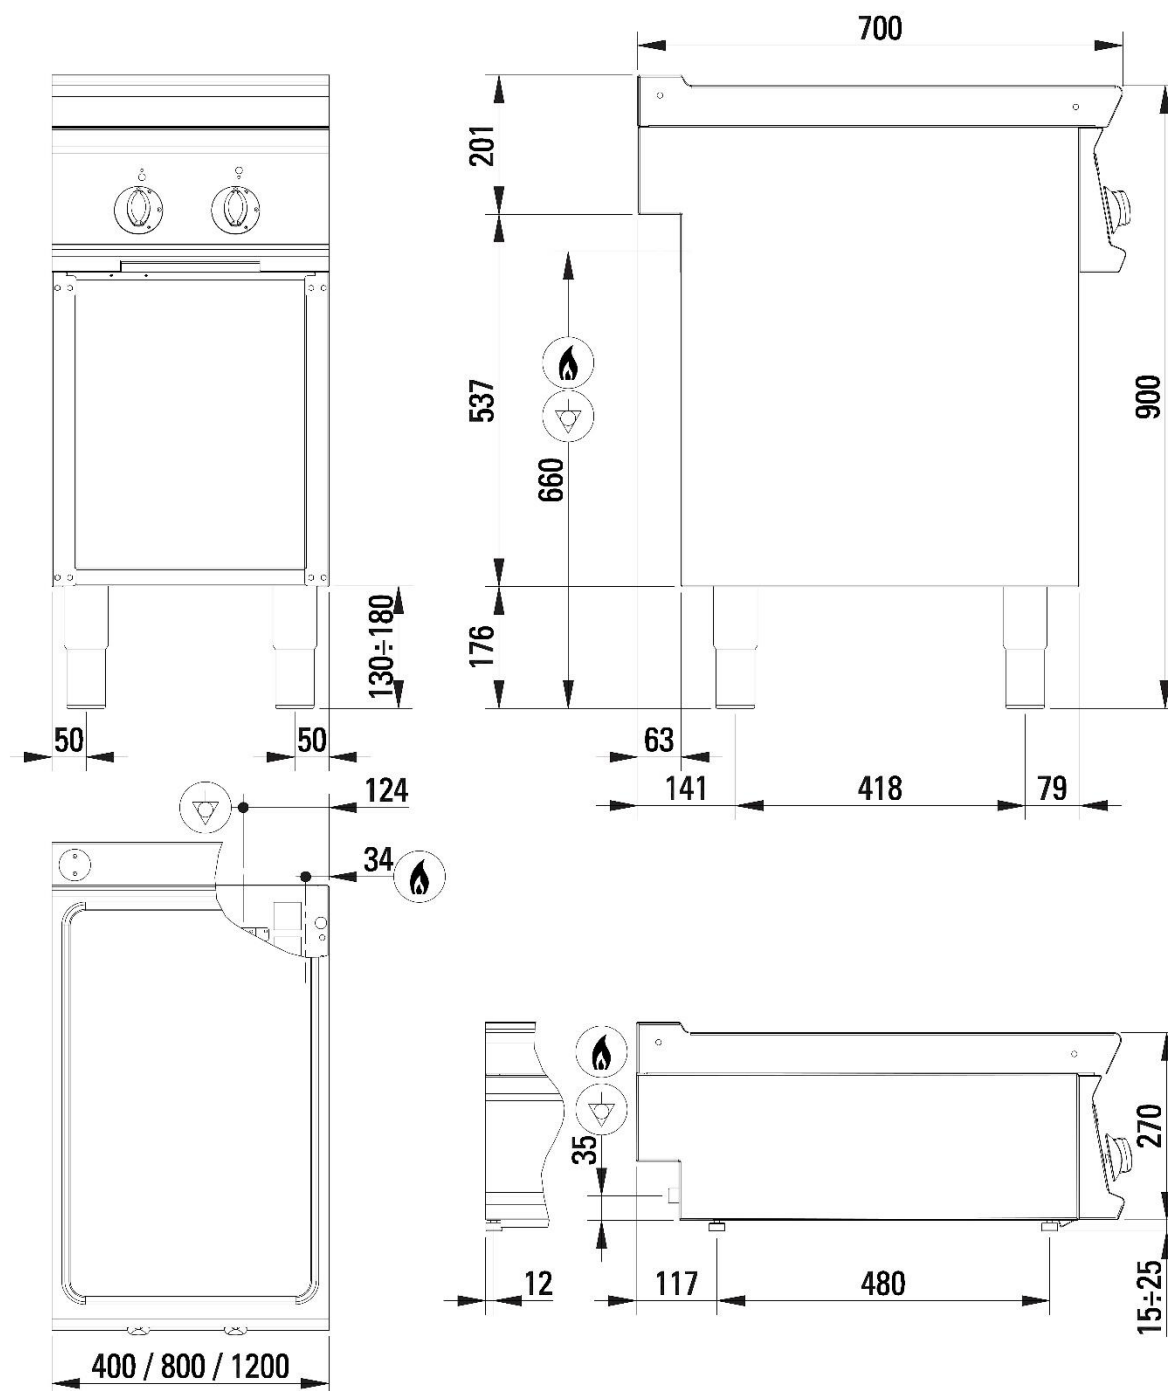


Fig.1 | Abb.1 | рис.1 - 5415.649.00