


713012

PC12G7

6-BURNER GAS BOILING TOP (TOP VERSION)



- 6-burner gas boiling top (120 cm), top version.
- High-efficiency cast iron burners and flame spreaders with a single ring (3.3 and 4.5 kW) and double ring (7.2 kW).
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition via pilot burner with safety thermocouple.
- Valved gas cock.
- Setup for installing a water tap.
- AISI304 dual-flame round rod pan support grid (10 mm diameter).
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

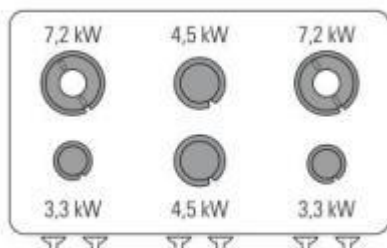

## TECHNICAL DATA

TOTAL POWER	30 kW	GAS POWER	30 kW
OPEN BURNER POWER	2x7,2+2x3,3+2x4,5 n°- kW	BOILING TOP POWER	30 kW
NATURAL GAS CONSUMPTION	3,17 m³/h	NUMBER OF BURNERS	n° 6
BOILING PAN SUPPORT	Tondino inox	CE GAS CERTIFICATE NUMBER	CE-0085B00091
GAS CONNECTION DIAMETER	3/4"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	1166 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	120 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	128 cm
PACKAGE DEPTH	81,0 cm	PACKAGE HEIGHT	55 cm
NET WEIGHT	64,0000 kg	GROSS WEIGHT	73,5 kg
VOLUME	0,57 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	2.36 m³/h	LATENT HEAT RELEASE	3600.0 W
SENSIBLE HEAT RELEASE	9000.0 W	STEAM RELEASE	5280.0 g/h

## ACCESSORIES

799506 PAIR OF CLOSING ELEMENTS (L=70CM)

## INSTALLATION SCHEMES



Fig.1 | Abb.1 | рис.1 - 5415.649.00