

713015**PPC8G7****GAS SOLID BOILING TOP (TOP VERSION)**



- Gas solid top, top version (80 cm).
- Non-deformable cast iron plate (1 cm thick).
- Cast iron central burner (9 kW) to reach a temperature of 400°C at the plate centre, with pilot burner and safety thermocouple.
- Piezoelectric ignition.
- Valved gas cock.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.



TECHNICAL DATA

TOTAL POWER	9 kW	GAS POWER	9 kW
BOILING TOP POWER	9 kW	GAS PLATE POWER	1x9 n°- kW
NATURAL GAS CONSUMPTION	0,95 m³/h	ELECTRIC PLATE DIMENSIONS	74,2x55,8 cm
NUMBER OF BURNERS	n° 1 (plate)	PLATE TYPE	Cast iron
HEATING ZONES	n° 1	CE GAS CERTIFICATE NUMBER	CE-0085BO0092
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	766 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	4	WIDTH	80 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	88 cm	PACKAGE DEPTH	81 cm
PACKAGE HEIGHT	57 cm	NET WEIGHT	77,2000 kg
GROSS WEIGHT	83,5 kg	VOLUME	0,40 m³
HARMONISED CODE	84198180	LPG CONSUMPTION	0.71 m³/h

ACCESSORIES

799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

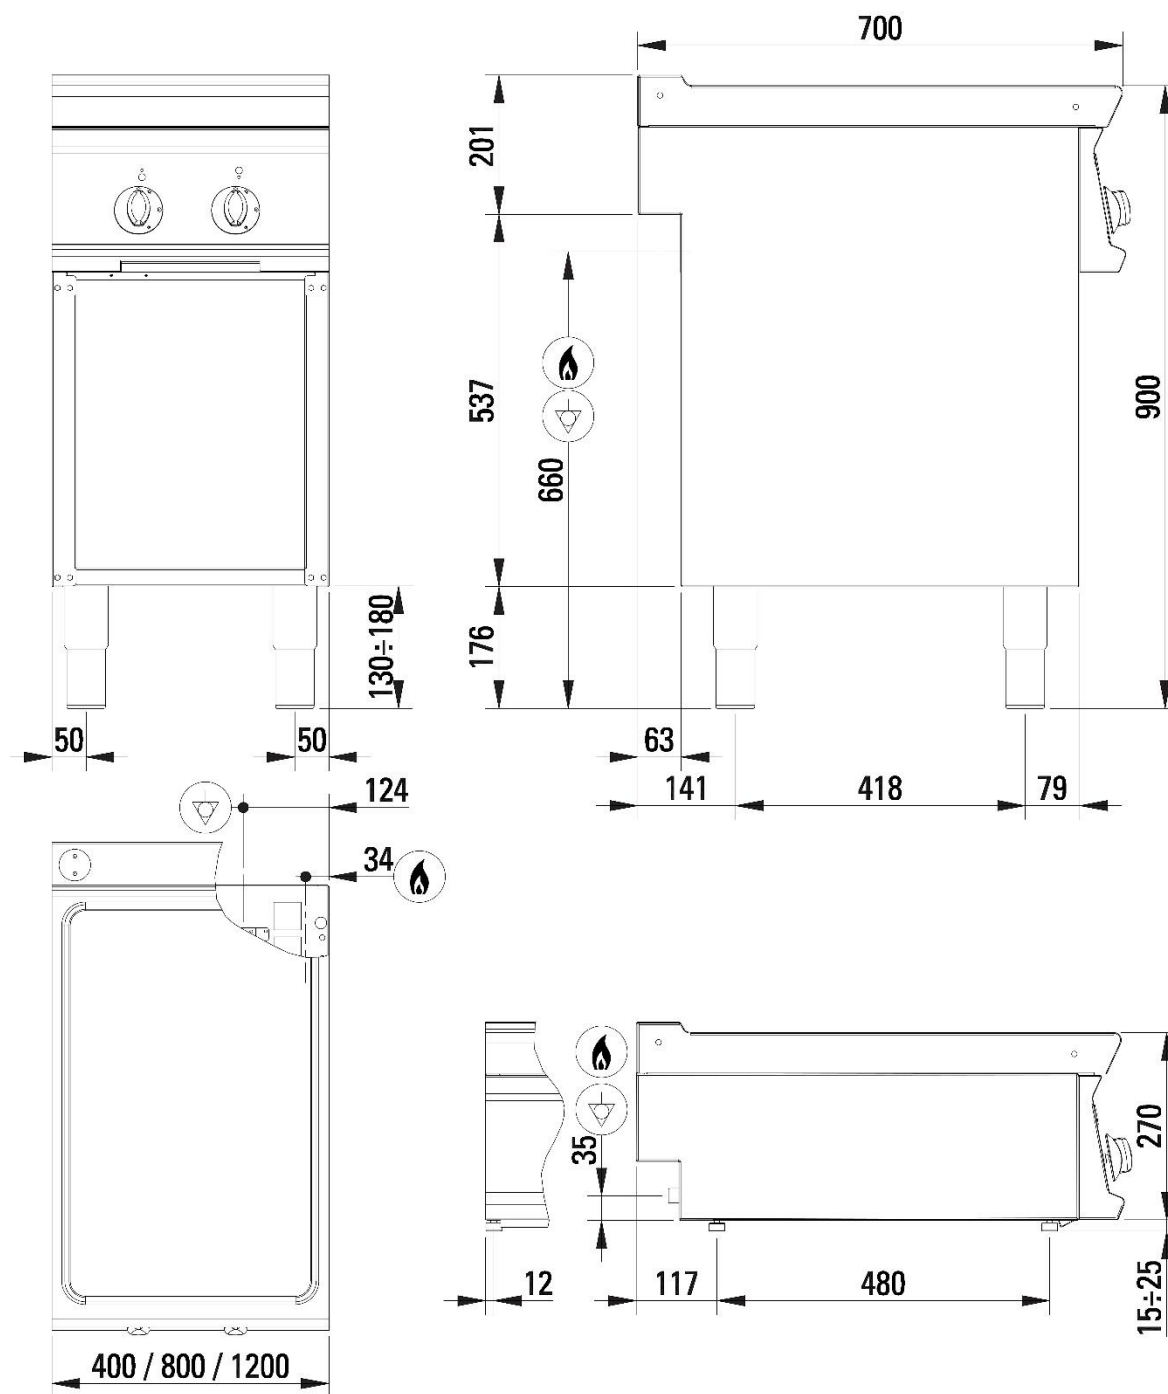


Fig.1 | Abb.1 | рис.1 - 5415.649.00