

713016

PCG4FG7

## FREESTANDING 2-BURNER GAS BOILING TOP WITH CAST IRON GRID ON OPEN CABINET





- Freestanding 2-burner gas boiling top (40 cm) on an open cabinet.
- High-efficiency cast iron burners and flame spreaders with a single ring (3.3 kW) and double ring (7.2 kW).
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition via pilot burner with safety thermocouple.
- Valved gas cock.
- Setup for installing a water tap.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.



40 cm

90 cm

47,0 cm

35,0000 kg

0,4300 m<sup>3</sup>

0.83 m<sup>3</sup>/h

3150.0 W

TECHNICAL DATA			
TOTAL POWER	10,5 kW	GAS POWER	10,5 kW
OPEN BURNER POWER	1x3,3 + 1x7,2 n°- kW	BOILING TOP POWER	10,5 kW
NATURAL GAS CONSUMPTION	1,11 m³/h	CABINET DIMENSIONS	33x57,4x39,5 cm
NUMBER OF BURNERS	n° 2	BOILING PAN SUPPORT	RAAF enamelled cast iron
CE GAS CERTIFICATE NUMBER	CE-0085BO0091	GAS CONNECTION DIAMETER	1/2"G EN10226-1
GAS CONNECTION HEIGHT (H)	660 mm	GAS CONNECTION HEIGHT (X)	366 mm
GAS CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	155 mm

WIDTH

HEIGHT

PACKAGE DEPTH

LPG CONSUMPTION

SENSIBLE HEAT RELEASE

**NET WEIGHT** 

VOLUME

## ACCESSORIES

FOOT ADJUSTMENT

PACKAGE WIDTH

PACKAGE HEIGHT

HARMONISED CODE

LATENT HEAT RELEASE

**GROSS WEIGHT** 

STEAM RELEASE

DEPTH

319002 STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90 799506 PAIR OF CLOSING ELEMENTS (L=70CM)

155/250 mm

70 cm

81,0 cm

114,0 cm

84198180

1260.0 W

1848.0 g/h

48 kg



## **INSTALLATION SCHEMES**

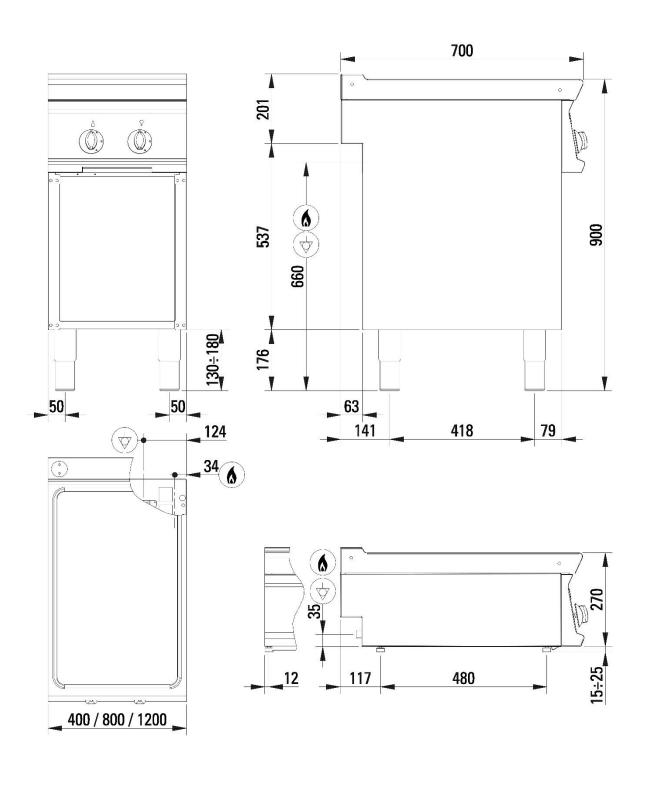


Fig.1 | Abb.1 | рис.1 - 5415.649.00