

713051

FR48FG7

**FREESTANDING DOUBLE TANK 8+8L GAS FRYER WITH IN-TANK HEAT EXCHANGERS ON CLOSED CABINET - BASKETS, LIDS AND OIL DRAINING TANK INCLUDED**



- Gas fryer 8+8 L on a closed cabinet (40 cm) with heat exchangers in the tank to ensure increased energy yield. This space-efficient solution enables the use of 2 types of oil or 2 cooking processes simultaneously.
- 1 oval heat exchanger per tank.
- Operating thermostatic valve.
- Piezoelectric ignition.
- Bulb thermostats immersed in oil are more efficient in sensing the temperature inside the tank, promptly adjusting the oil to the desired temperature, minimising smoke points, and prolonging the oil life.
- Power: 2x8 kW.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Deep drawn worktop with a seamlessly welded AISI 304 deep drawn cooking tank, featuring rounded corners.
- Rounded internal profile of the tank to facilitate cleaning, complying with hygiene standards.
- Large front basin and front zone for oil and foam expansion.
- Pilot burner and safety thermocouple.
- Max. Temperature 190°C below oil smoke point.
- Draining on the tank bottom.
- Tank with baskets, lids, and a filter for collecting oil inside a closed compartment.
- Tank with a filter for collecting oil inside the cabinet, baskets and lids included.
- Technical compartment for easy connection to the gas network.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

## TECHNICAL DATA

TOTAL POWER	12 kW	GAS POWER	12 kW
TEMPERATURE RANGE	110÷190 °C	TANK CAPACITY	8lt+8lt
NATURAL GAS CONSUMPTION	1,26 m³/h	TANK DIMENSIONS	14x34,2x30,5 cm
HEATING	Heat exchangers in the tank	TANK TYPE	AISI 304
TANKS	n° 2	CE GAS CERTIFICATE NUMBER	CE-0085BO0095
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	23 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-472 mm	GAS CONNECTION DIAMETER	1/2"G EN10226-1
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	81,0 cm
PACKAGE DEPTH	47,0 cm	PACKAGE HEIGHT	115 cm
NET WEIGHT	56 kg	GROSS WEIGHT	65,8 kg
VOLUME	0,4300 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	0.95 m³/h	LATENT HEAT RELEASE	8400.0 W
SENSIBLE HEAT RELEASE	1080.0 W	STEAM RELEASE	12360.0 g/h

## ACCESSORIES

- 719004 TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=40CM)
- 799503 SIDE COVERING PANEL FOR FREESTANDING MODULE
- 799506 PAIR OF CLOSING ELEMENTS (L=70CM)

## INSTALLATION SCHEMES

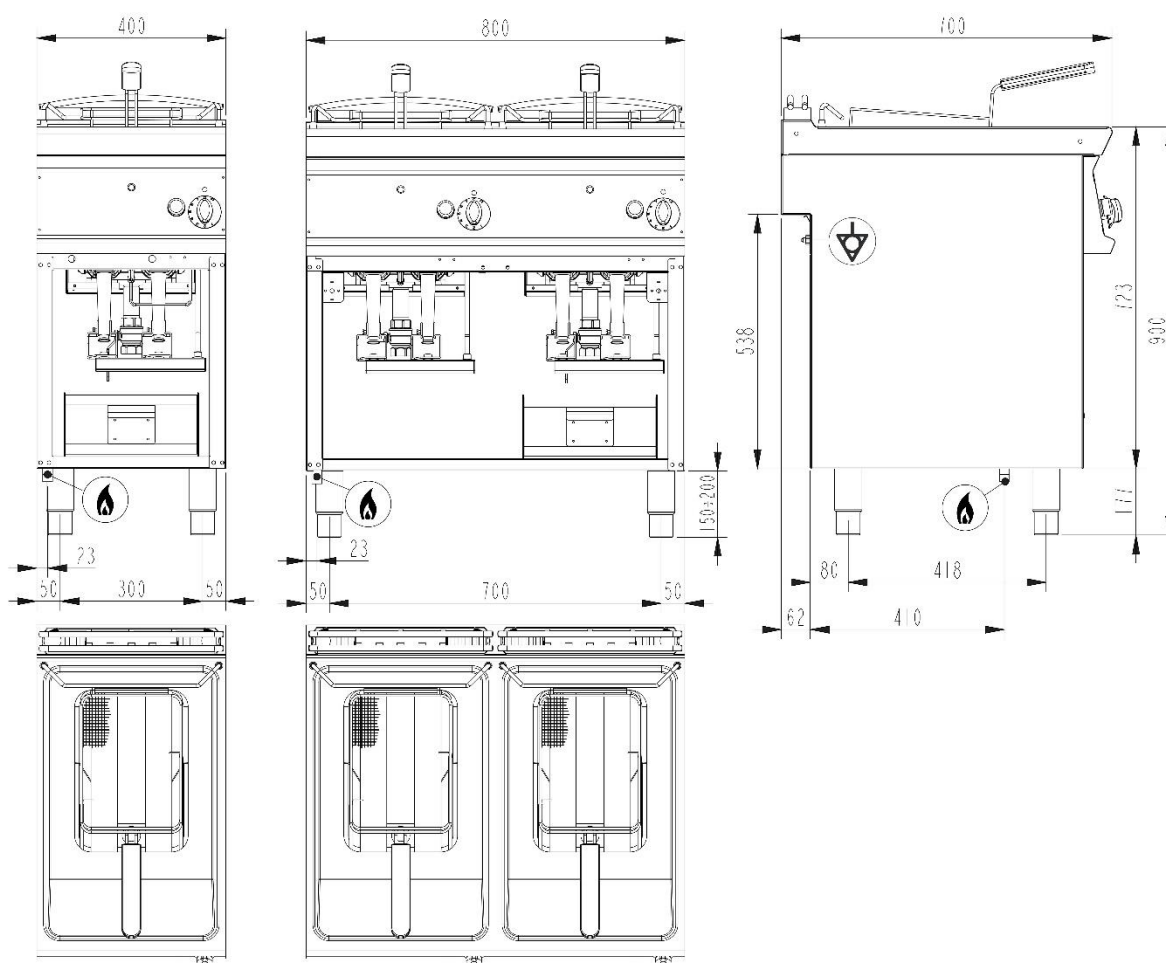


Fig.1 | Abb.1 | рис.1 - 5415.658.00