

713088

P8IG7

**FREESTANDING GAS BOILING PAN 50L WITH
INDIRECT HEATING AND AISI 316 STAINLESS STEEL
TANK**



- Gas indirect heat boiling pan gas with a 50 L capacity.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Indirect heat boiling pans heating pans are suitable for cooking dense or gelatinous foods as well as for immersion cooking.
- AISI 304 stainless steel tank walls and AISI 316 bottom (2 mm thick).
- Worktop with a liquid-collection basin and drain.
- Heating through high thermal-efficient stainless steel tubular burners.
- Cavity Jacket with pressure gauge, 0.5 bar safety valve and cap for filling distilled water.
- The gas supply to the burner is regulated by a valved gas cock.
- Temperature control "Off-On-Min-Max".
- Piezoelectric ignition.
- Pilot burner and safety thermocouple.
- Stainless steel lid with heat-resistant handle.
- Mixer tap for loading hot/cold water fixed on the rear part of the worktop.at the worktop rear.
- Chrome-plated brass tank drain valve with heat-resistant handle on front panel.
- AISI 304 height-adjustable feet (133/195 mm).
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.


TECHNICAL DATA

TOTAL POWER	15,5 kW	GAS POWER	15,5 kW
TANK CAPACITY	50lt	NATURAL GAS CONSUMPTION	1,64 m ³ /h
TANK DIMENSIONS	Ø40xh45 cm	HEATING	Indirect
CE GAS CERTIFICATE NUMBER	CE-0085BM0283	WATER CONNECTION POSITION	Bottom
GAS CONNECTION DIAMETER	1/2"G EN10226-1	WATER CONNECTION DIAMETER	0,393701"
WIDTH	80 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	92 cm
PACKAGE DEPTH	86 cm	PACKAGE HEIGHT	117 cm
NET WEIGHT	90,0000 kg	GROSS WEIGHT	110,0000 kg
VOLUME	0,92 m ³	HARMONISED CODE	84198180
LPG CONSUMPTION	1.22 m ³ /h		

ACCESSORIES

- 619007 PASTA BASKET FOR 50L BOILING PAN - 3MM HOLE DIAMETER - 0.12 IN
- 619008 VEGETABLES BASKET FOR 50LT BOILING PAN -HOLES DIAMETER 5MM - 0.20INCH
- 799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

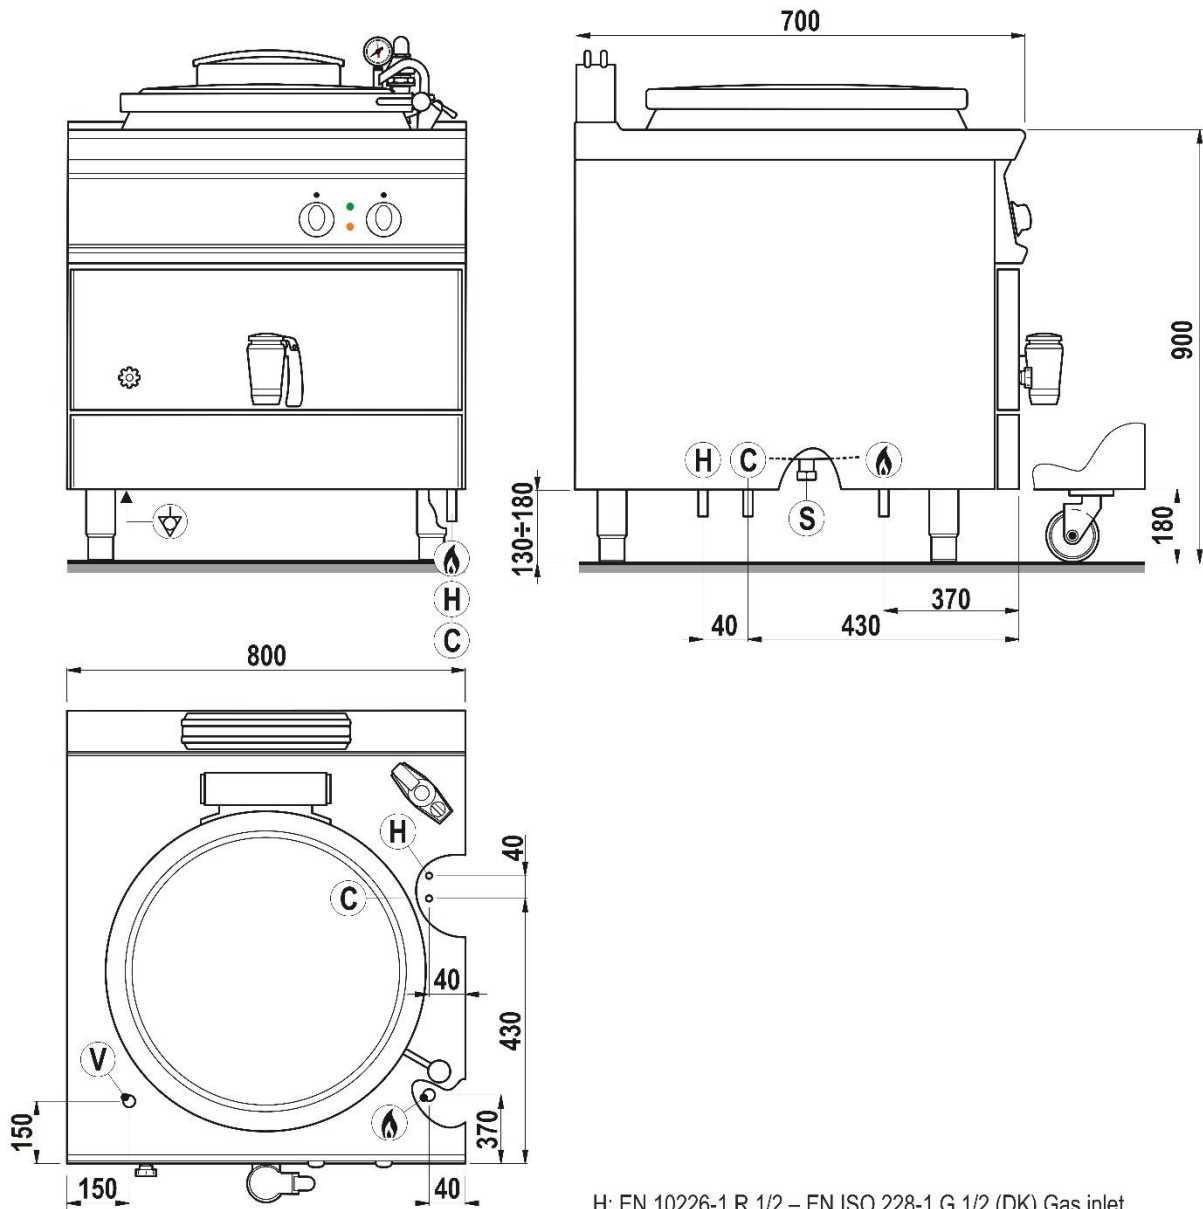

H: EN 10226-1 R 1/2 – EN ISO 228-1 G 1/2 (DK) Gas inlet
 ∅: Equipotential connection
 H: Hot water inlet Ø10 mm
 C: Cold water inlet Ø10 mm
 S: Cavity discharge (closed)
 V: Drain from top

Fig.1 | Abb.1 | рис.1 - 09.04.2021 - 5416.389.00