

713194

PCH4G7

2-BURNER HERMETIC GAS BOILING TOP WITH CAST IRON GRID (TOP VERSION)



- 2-burner gas boiling top (40 cm).
- High-efficiency hermetic burners, cast-iron base and brass flame spreader with power 5 kW and 7,5 kW
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition via always-on pilot burner with safety thermocouple.
- Valved gas cock.
- Setup for installing a water tap.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	12,5 kW	GAS POWER	12,5 kW
OPEN BURNER POWER	1x5 + 1x7,5 n°- kW	BOILING TOP POWER	12,5 kW
NATURAL GAS CONSUMPTION	1,32 m³/h	LPG CONSUMPTION	0.99 m³/h
NUMBER OF BURNERS	n° 2	BOILING PAN SUPPORT	RAAF enamelled cast iron
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	366 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	81,0 cm
PACKAGE DEPTH	47,0 cm	PACKAGE HEIGHT	55 cm
NET WEIGHT	29,2 kg	GROSS WEIGHT	34,6 kg
VOLUME	0,21 m³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	1500.0 W	SENSIBLE HEAT RELEASE	3750.0 W
STEAM RELEASE	2200.0 g/h		

ACCESSORIES

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)

INSTALLATION SCHEMES

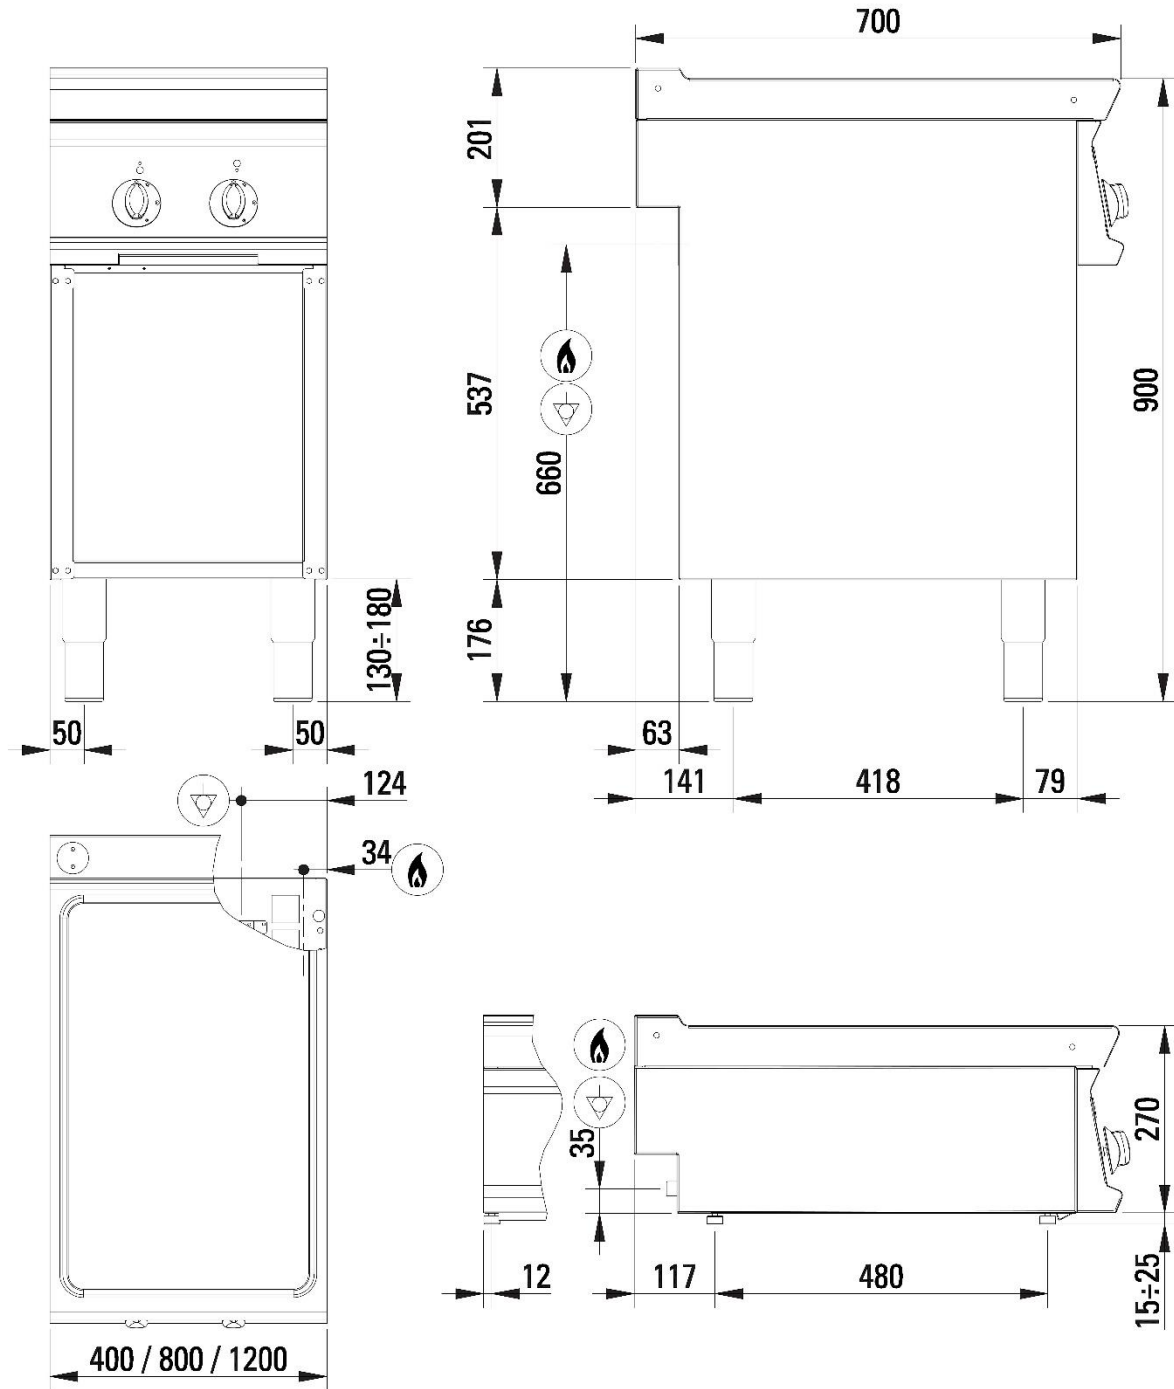


Fig.1 | Abb.1 | рис.1 - 5415.649.00