


713195

PCH4SG7

SUPER 2-BURNER HERMETIC GAS BOILING TOP WITH CAST IRON GRID (TOP VERSION)



- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	15 kW	GAS POWER	15 kW
OPEN BURNER POWER	2x7,5 n°- kW	BOILING TOP POWER	15 kW
NATURAL GAS CONSUMPTION	1,58 m³/h	LPG CONSUMPTION	1.18 m³/h
NUMBER OF BURNERS	n° 2	BOILING PAN SUPPORT	RAAF enamelled cast iron
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	366 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	81,0 cm
PACKAGE DEPTH	47,0 cm	PACKAGE HEIGHT	55 cm
NET WEIGHT	29,2 kg	GROSS WEIGHT	34,6 kg
VOLUME	0,21 m³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	1800.0 W	SENSIBLE HEAT RELEASE	4500.0 W
STEAM RELEASE	2640.0 g/h		

ACCESSORIES

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)

INSTALLATION SCHEMES

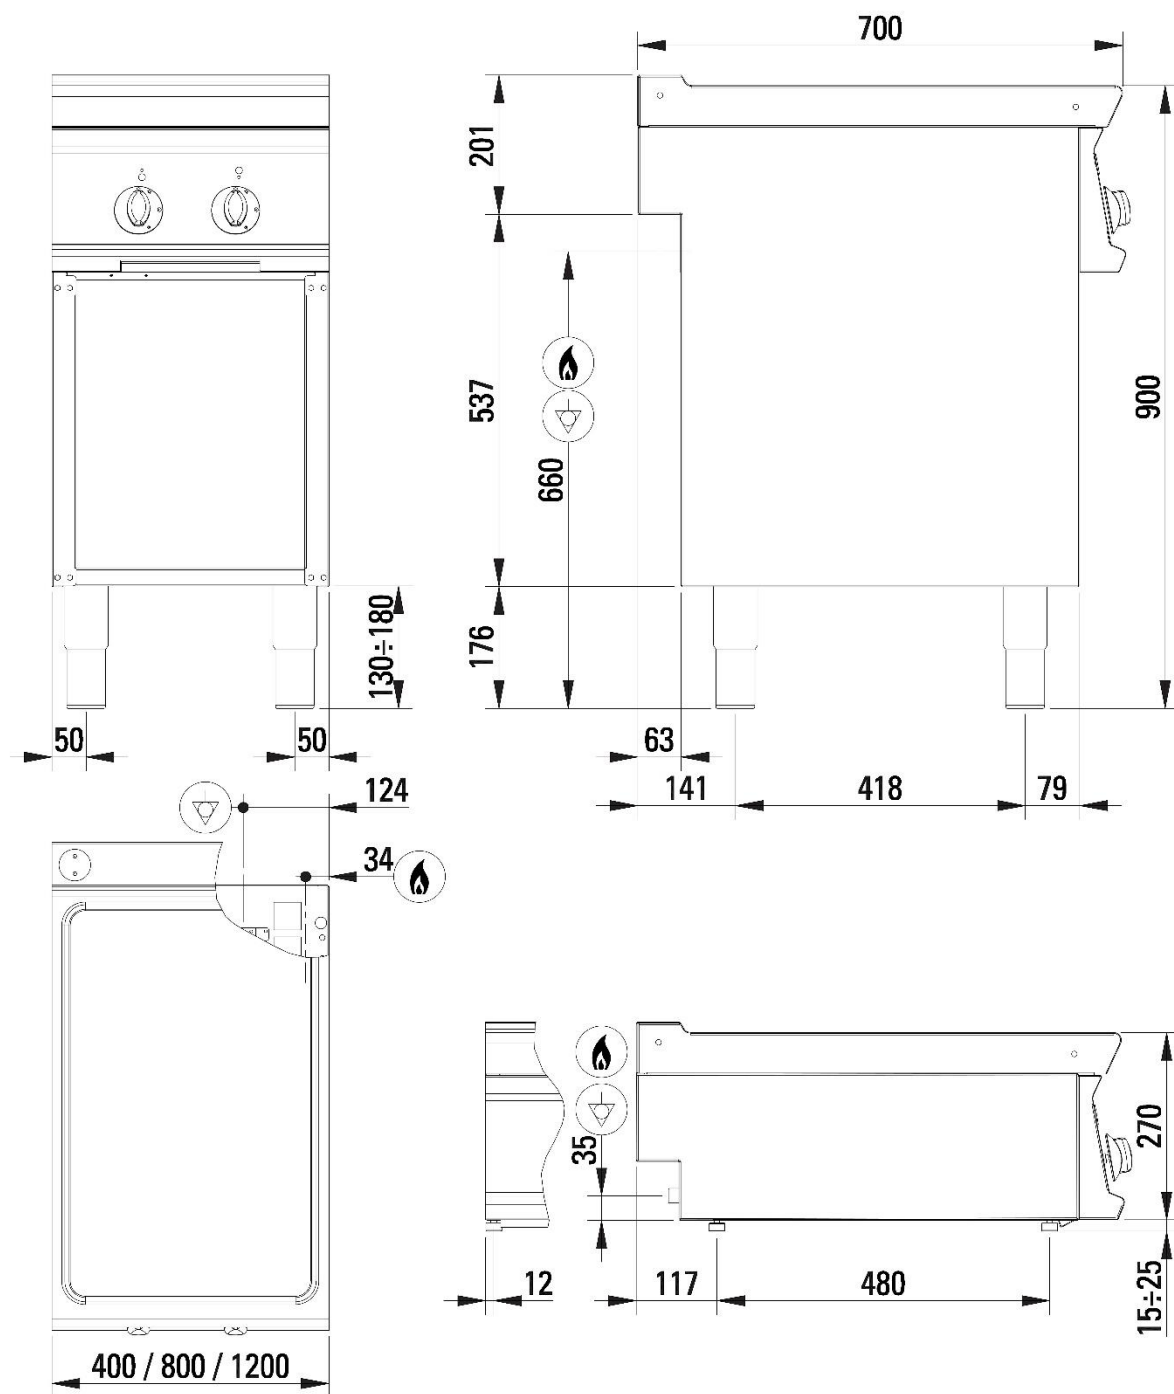


Fig.1 | Abb.1 | рис.1 - 5415.649.00