

713196

PCH4FG7

## FREESTANDING 2-BURNER HERMETIC GAS BOILING TOP WITH CAST IRON GRID ON OPEN CABINET



- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.





TECHNICAL DATA			
TOTAL POWER	12,5 kW	GAS POWER	12,5 kW
OPEN BURNER POWER	1x5 + 1x7,5 n°- kW	BOILING TOP POWER	12,5 kW
NATURAL GAS CONSUMPTION	1,32 m³/h	LPG CONSUMPTION	0.99 m³/h
CABINET DIMENSIONS	33x57,4x39,5 cm	NUMBER OF BURNERS	n° 2
BOILING PAN SUPPORT	RAAF enamelled cast iron	GAS CONNECTION DIAMETER	1/2"G EN10226-1
GAS CONNECTION HEIGHT (H)	660 mm	GAS CONNECTION HEIGHT (X)	366 mm
GAS CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	WIDTH	40 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	81,0 cm	PACKAGE DEPTH	47,0 cm
PACKAGE HEIGHT	114,0 cm	NET WEIGHT	35,0000 kg
GROSS WEIGHT	48 kg	VOLUME	0,4300 m <sup>3</sup>
HARMONISED CODE	84198180	LATENT HEAT RELEASE	1500.0 W
SENSIBLE HEAT RELEASE	3750.0 W	STEAM RELEASE	2200.0 g/h

## **ACCESSORIES**

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)



## **INSTALLATION SCHEMES**

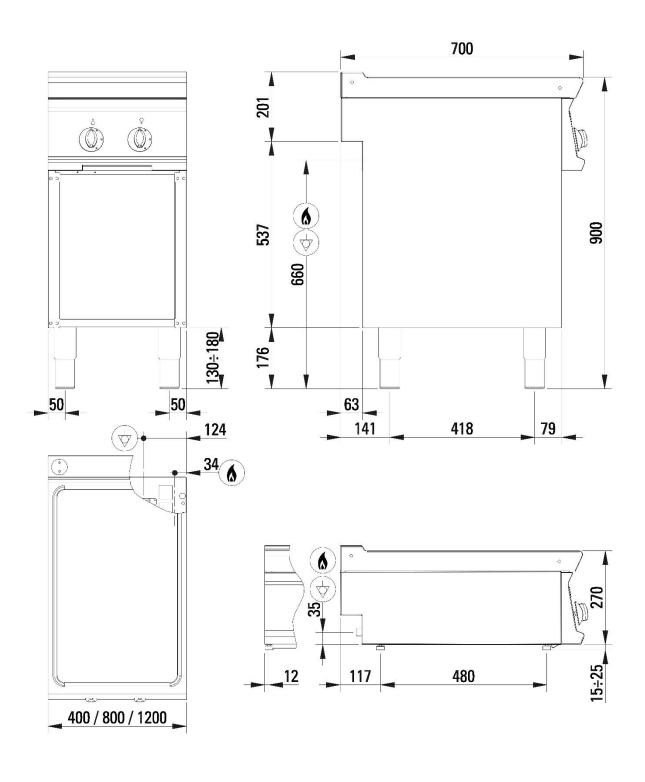


Fig.1 | Abb.1 | рис.1 - 5415.649.00