


**713198**

PCH8G7

**4-BURNER HERMETIC GAS BOILING TOP WITH  
CAST IRON GRIDS (TOP VERSION)**



- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

## TECHNICAL DATA

TOTAL POWER	25 kW	GAS POWER	25 kW
OPEN BURNER POWER	2x5 + 2x7,5 n°- kW	BOILING TOP POWER	25 kW
NATURAL GAS CONSUMPTION	2,64 m³/h	LPG CONSUMPTION	1.97 m³/h
NUMBER OF BURNERS	n° 4	BOILING PAN SUPPORT	RAAF enamelled cast iron
GAS CONNECTION DIAMETER	1/2"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	766 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	80 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	86 cm
PACKAGE DEPTH	80 cm	PACKAGE HEIGHT	55 cm
NET WEIGHT	53,4 kg	GROSS WEIGHT	62,2 kg
VOLUME	0,3800 m³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	3000.0 W	SENSIBLE HEAT RELEASE	7500.0 W
STEAM RELEASE	4400.0 g/h		

## ACCESSORIES

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)

## INSTALLATION SCHEMES

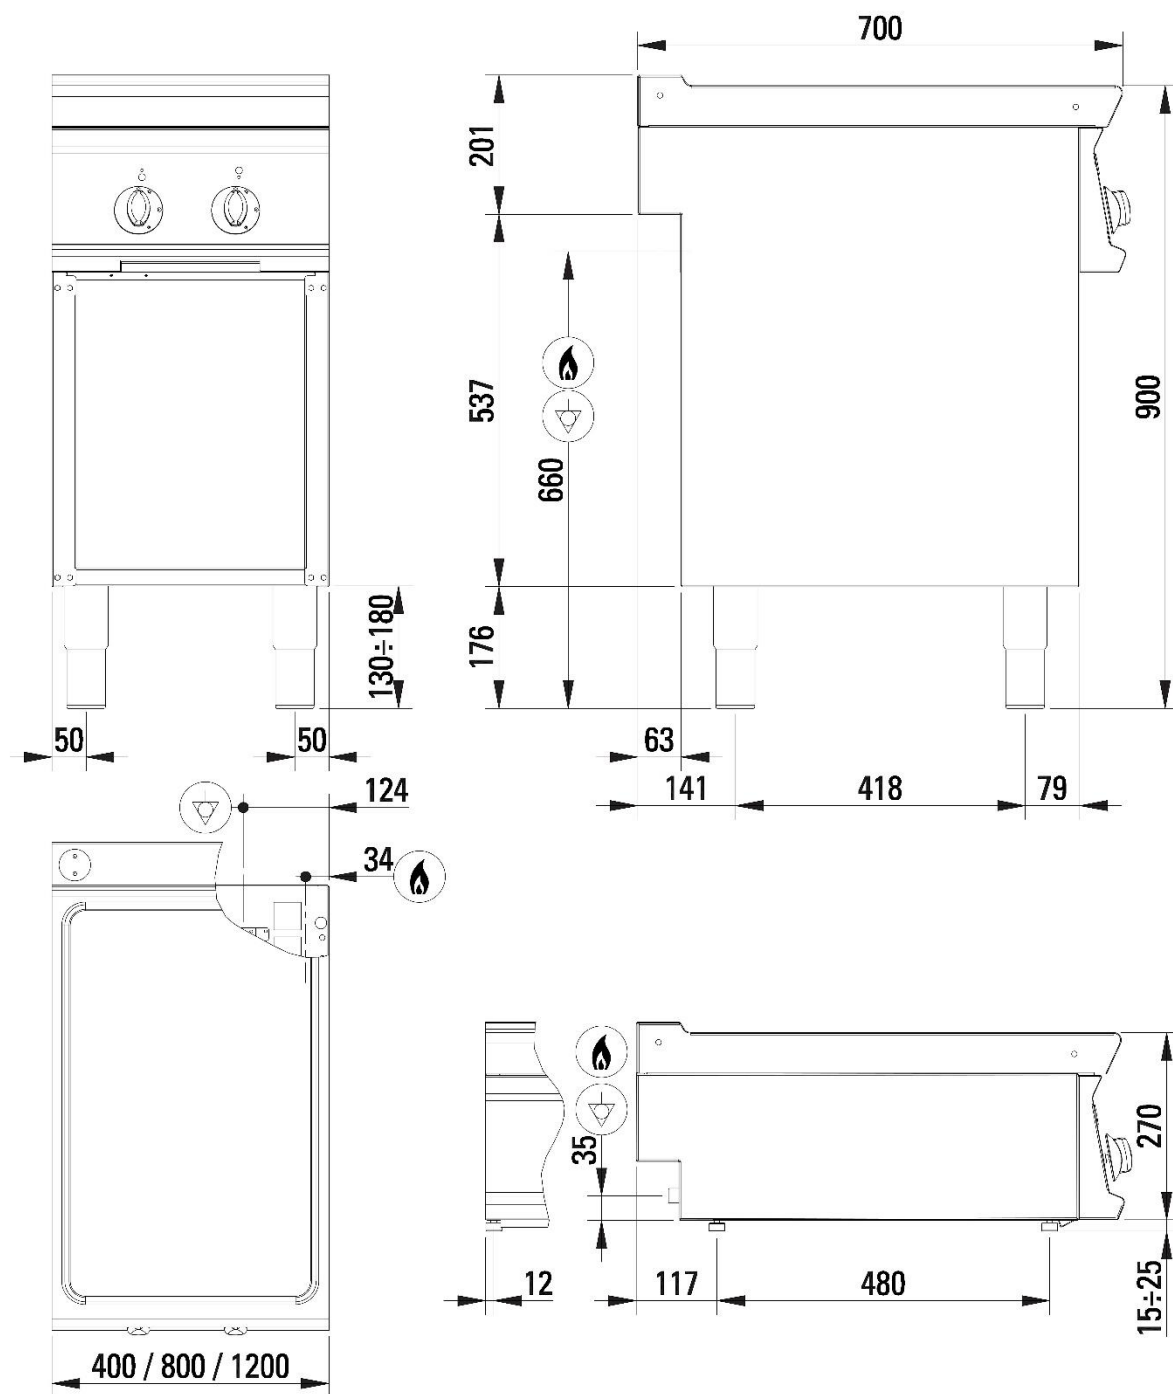


Fig.1 | Abb.1 | рис.1 - 5415.649.00