


713200

PCH8FG7

FREESTANDING 4-BURNER HERMETIC GAS BOILING TOP WITH CAST IRON GRIDS ON OPEN CABINET



- Freestanding 4-burner gas boiling top on an open cabinet (80 cm).
- High-efficiency hermetic burners, cast-iron base and brass flame spreader with power 5 kW and 7,5 kW
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition via always-on pilot burner with safety thermocouple.
- Valved gas cock.
- Setup for installing a water tap.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	25 kW	GAS POWER	25 kW
OPEN BURNER POWER	2x5 + 2x7,5 n°- kW	BOILING TOP POWER	25 kW
NATURAL GAS CONSUMPTION	2,64 m³/h	LPG CONSUMPTION	1.97 m³/h
CABINET DIMENSIONS	73x57,4x39,5 cm	NUMBER OF BURNERS	n° 4
BOILING PAN SUPPORT	RAAF enamelled cast iron	GAS CONNECTION DIAMETER	1/2"G EN10226-1
GAS CONNECTION HEIGHT (H)	660 mm	GAS CONNECTION HEIGHT (X)	766 mm
GAS CONNECTION HEIGHT (Y)	-63 mm	CAMPO_0179	667
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
WIDTH	80 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	85,0 cm
PACKAGE DEPTH	82,0 cm	PACKAGE HEIGHT	114,0 cm
NET WEIGHT	65,5000 kg	GROSS WEIGHT	83,0000 kg
VOLUME	0,7900 m³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	3000.0 W	SENSIBLE HEAT RELEASE	7500.0 W
STEAM RELEASE	4400.0 g/h		

ACCESSORIES

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)

INSTALLATION SCHEMES

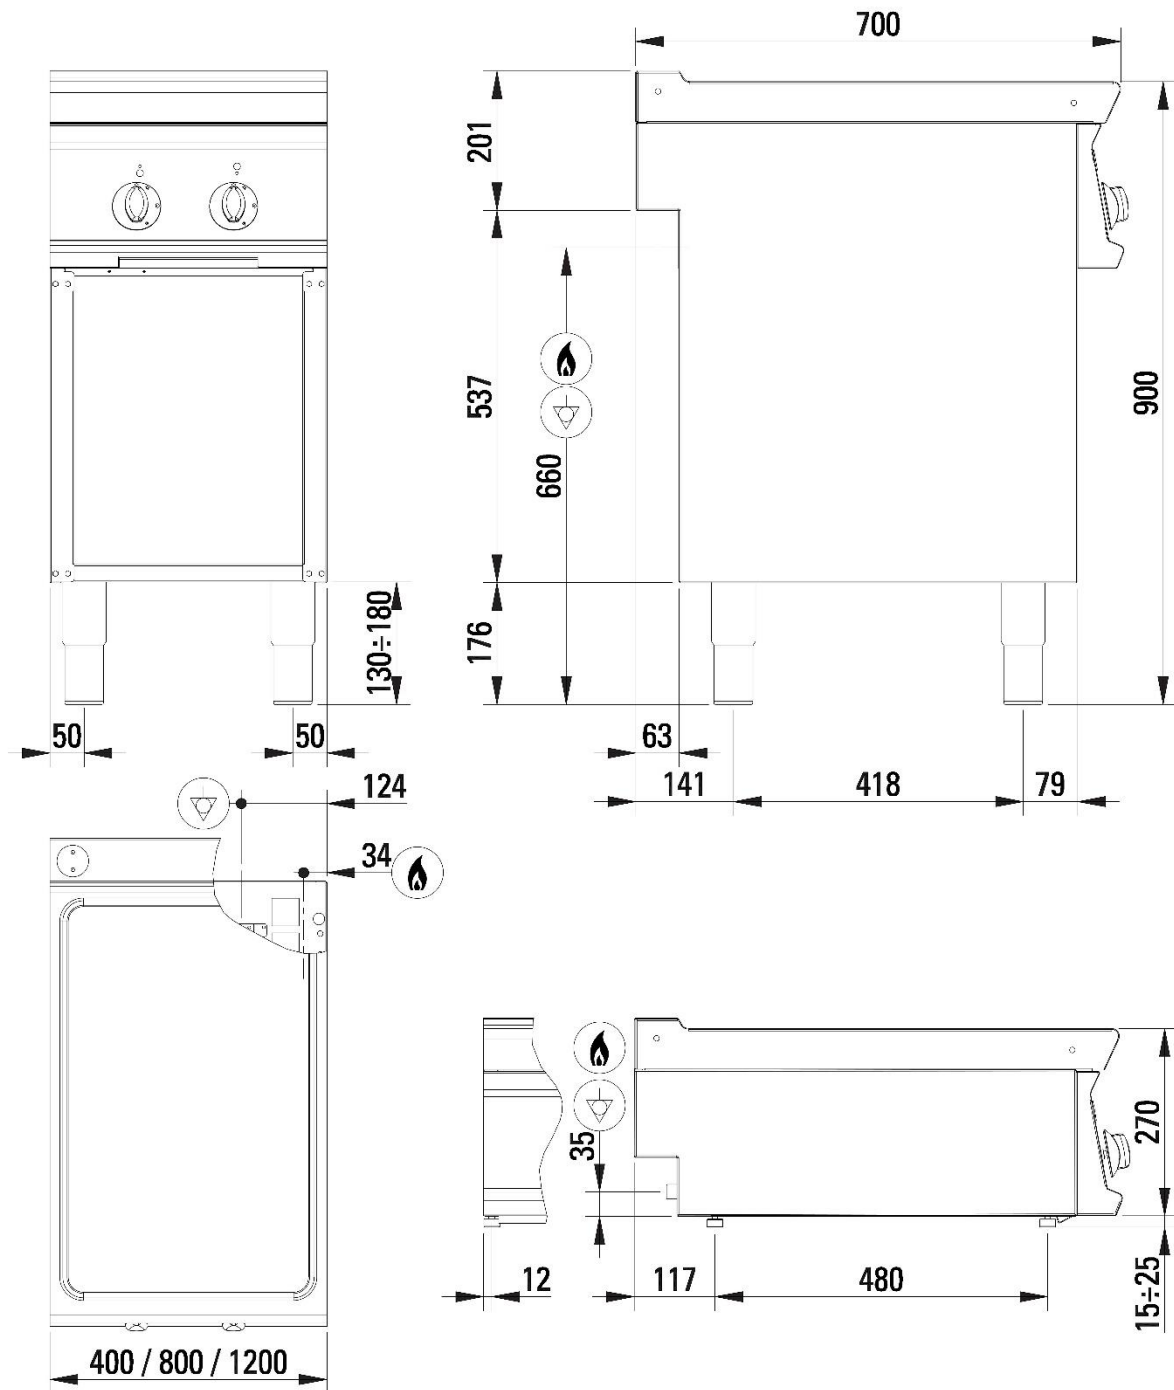


Fig.1 | Abb.1 | рис.1 - 5415.649.00