


713203

PCH12SG7

**6-BURNER HERMETIC GAS BOILING TOP WITH
CAST IRON GRID (TOP VERSION)**



- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

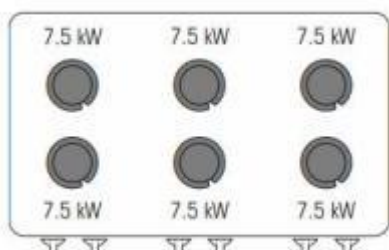

TECHNICAL DATA

TOTAL POWER	45 kW	GAS POWER	45 kW
OPEN BURNER POWER	6x7,5 n°- kW	BOILING TOP POWER	37,5 kW
NATURAL GAS CONSUMPTION	4,76 m³/h	LPG CONSUMPTION	3.55 m³/h
NUMBER OF BURNERS	n° 6	BOILING PAN SUPPORT	RAAF enamelled cast iron
GAS CONNECTION DIAMETER	3/4"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	1166 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	120 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	127,0 cm
PACKAGE DEPTH	81,0 cm	PACKAGE HEIGHT	54,0 cm
NET WEIGHT	79,1 kg	GROSS WEIGHT	89,6 kg
VOLUME	0,5500 m³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	5400.0 W	SENSIBLE HEAT RELEASE	13500.0 W
STEAM RELEASE	7920.0 g/h		

ACCESSORIES

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)

INSTALLATION SCHEMES



Fig.1 | Abb.1 | рис.1 - 5415.649.00