


713213

PFH12V7

6-BURNER HERMETIC GAS COOKER ON GN1/1 ELECTRIC CONVECTION OVEN WITH 1 GRID

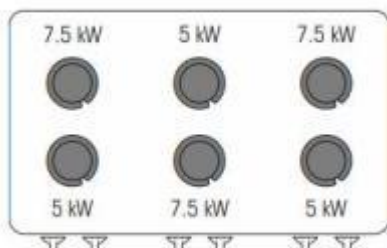

- 6-burner gas cooker on a GN 1/1 electric convection oven (80 cm) and a cabinet with a door (40 cm).
- High-efficiency hermetic burners, cast-iron base and brass flame spreader with power 5 kW and 7,5 kW
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition via always-on pilot burner with safety thermocouple.
- Valved gas cock.
- Setup for installing a water tap.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> GN 1/1 ELECTRIC CONVECTION OVEN.

>> AISI 304 stainless steel oven door.

>> Stainless steel cooking chamber and long-lasting steel mesh and glass fibre gasket resistant to high temperatures.

>> Heating through 2 fans with 2 heating elements with thermostatic control 60-270°C.

>> Stainless steel removable side tray racks.

>> 1 grid included.

- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

| | | | |
|----------------------------------|--------------------------|-----------------------------------|------------------|
| TOTAL POWER | 37,5 + 5 kW | GAS POWER | 37,5 kW |
| ELECTRIC POWER | 5 kW | FREQUENCY | 50/60 Hz |
| VOLTAGE | 380-415 3N~ V | OVEN POWER | 5 kW |
| OPEN BURNER POWER | 3x5 + 3x7,5 n°- kW | BOILING TOP POWER | 30 kW |
| TRAY CAPACITY | n° 5xGN1/1 | NATURAL GAS CONSUMPTION | 3,96 m³/h |
| LPG CONSUMPTION | 2.96 m³/h | COOKING CHAMBER DIMENSIONS | 57x51,5x30 cm |
| OVEN DIMENSIONS | GN1/1 | GUIDES | n° 5 |
| NUMBER OF BURNERS | n° 6 | VERTICAL DISTANCE BETWEEN TRAYS | 5 cm |
| OVEN TEMPERATURE RANGE | 60÷270 °C | MINIMUM POWER CABLE CROSS-SECTION | 5 x 1,5 n° - mm² |
| BOILING PAN SUPPORT | RAAF enamelled cast iron | ELECTRIC CABLE TYPE | H07 RN-F |
| OVEN TYPE | Convection | ELECTRICAL CONNECTION HEIGHT (H) | 0 mm |
| ELECTRICAL CONNECTION HEIGHT (X) | 1050 mm | ELECTRICAL CONNECTION HEIGHT (Y) | -580 mm |
| GAS CONNECTION DIAMETER | 1/2"G EN10226-1 | GAS CONNECTION HEIGHT (H) | 0 mm |
| GAS CONNECTION HEIGHT (X) | 1166 mm | GAS CONNECTION HEIGHT (Y) | -412 mm |
| FOOT HEIGHT | 155 mm | FOOT ADJUSTMENT | 155/250 mm |
| IPX RATING | 4 | WIDTH | 120 cm |
| DEPTH | 70 cm | HEIGHT | 90 cm |
| PACKAGE WIDTH | 127 cm | PACKAGE DEPTH | 81 cm |
| PACKAGE HEIGHT | 114 cm | NET WEIGHT | 136 kg |
| GROSS WEIGHT | 163 kg | VOLUME | 1,17 m³ |
| HARMONISED CODE | 84198180 | LATENT HEAT RELEASE | 4500.0 W |
| SENSIBLE HEAT RELEASE | 11250.0 W | STEAM RELEASE | 6600.0 g/h |

ACCESSORIES

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 kW)

INSTALLATION SCHEMES

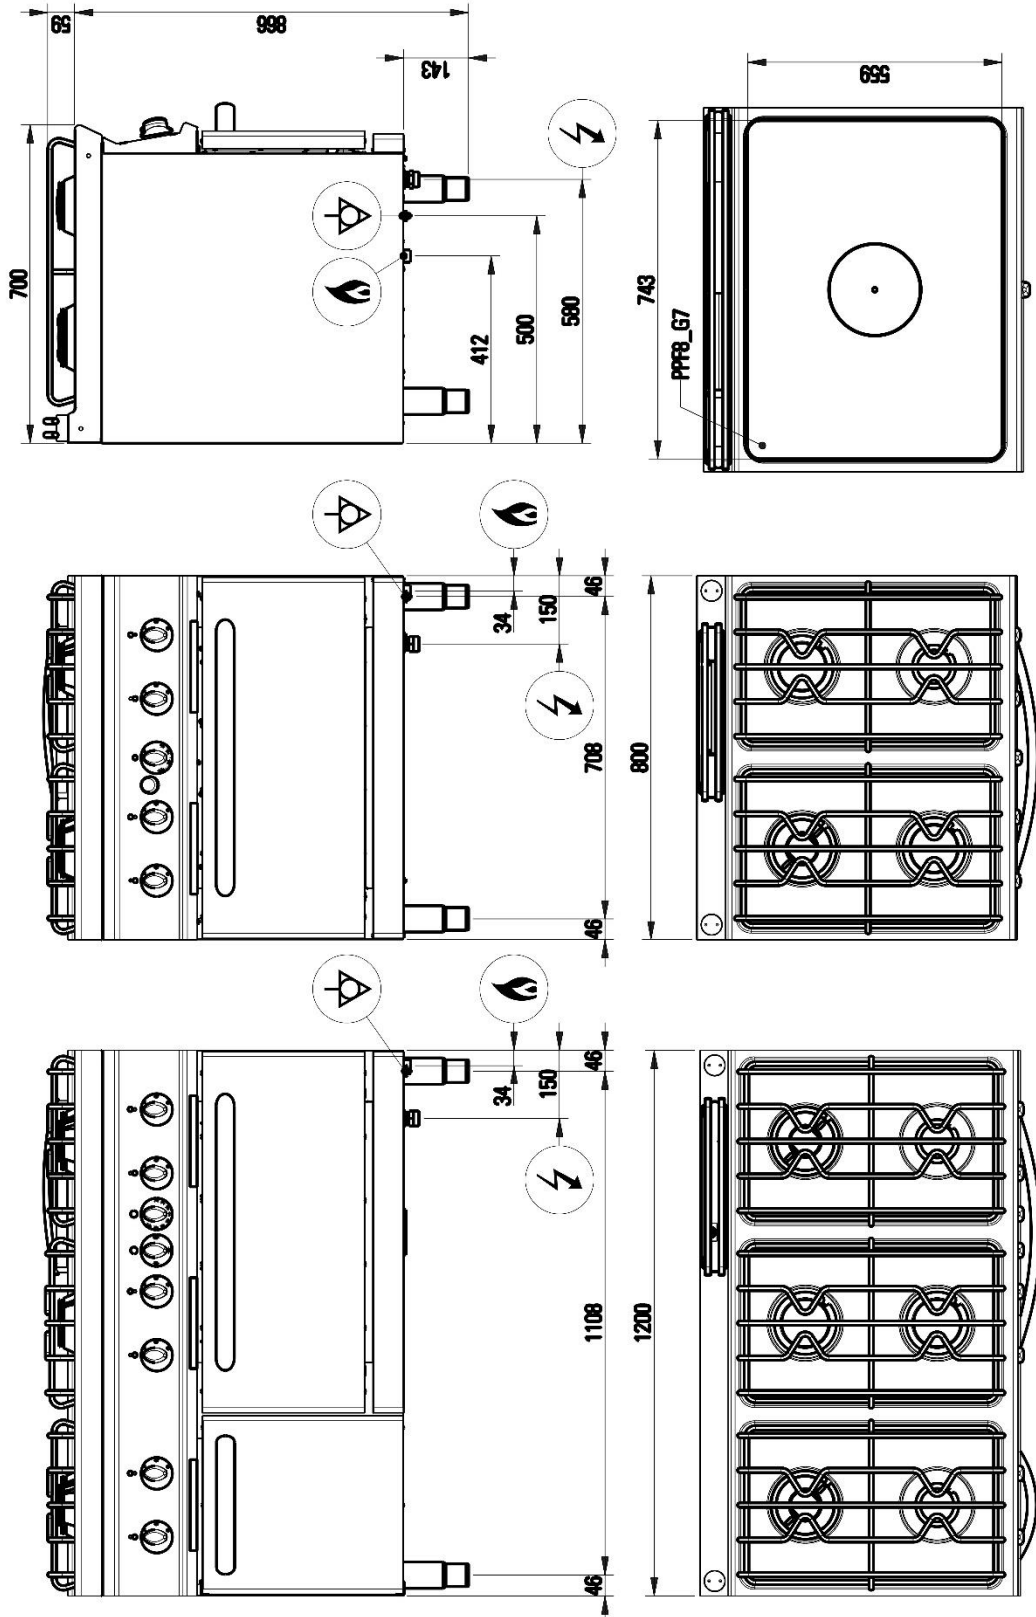


Fig.1 | Abb.1 | pnc.1 - 5415.647.00