


713215

PFXH12SGG7

**6-BURNER HERMETIC GAS BOILING TOP SUPER
WITH CAST IRON GRIDS ON GAS STATIC FULLSIZE
OVEN WITH 1 GRID**



- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

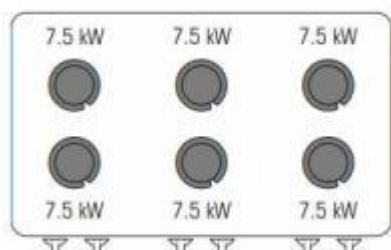

TECHNICAL DATA

TOTAL POWER	52 kW	GAS POWER	52 kW
OVEN POWER	7 kW	OPEN BURNER POWER	6x7,5 n°- kW
BOILING TOP POWER	45 kW	TRAY CAPACITY	n° 4x(883x603)
NATURAL GAS CONSUMPTION	5,50 m³/h	LPG CONSUMPTION	4.1 m³/h
COOKING CHAMBER DIMENSIONS	92,5x63x30 cm	OVEN DIMENSIONS	Full size H. 30 cm
GUIDES	n° 4	NUMBER OF BURNERS	n° 6
VERTICAL DISTANCE BETWEEN TRAYS	6 cm	OVEN TEMPERATURE RANGE	150÷290 °C
BOILING PAN SUPPORT	RAAF enamelled cast iron	OVEN TYPE	Static
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	1050 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-580 mm	GAS CONNECTION DIAMETER	3/4"G EN10226-1
GAS CONNECTION HEIGHT (H)	0 mm	GAS CONNECTION HEIGHT (X)	1166 mm
GAS CONNECTION HEIGHT (Y)	-412 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	WIDTH	120 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	125,0 cm	PACKAGE DEPTH	80 cm
PACKAGE HEIGHT	110 cm	NET WEIGHT	160,5 kg
GROSS WEIGHT	183,4 kg	VOLUME	1,10 m³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	6240.0 W
SENSIBLE HEAT RELEASE	15600.0 W	STEAM RELEASE	9152.0 g/h

ACCESSORIES

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)

INSTALLATION SCHEMES

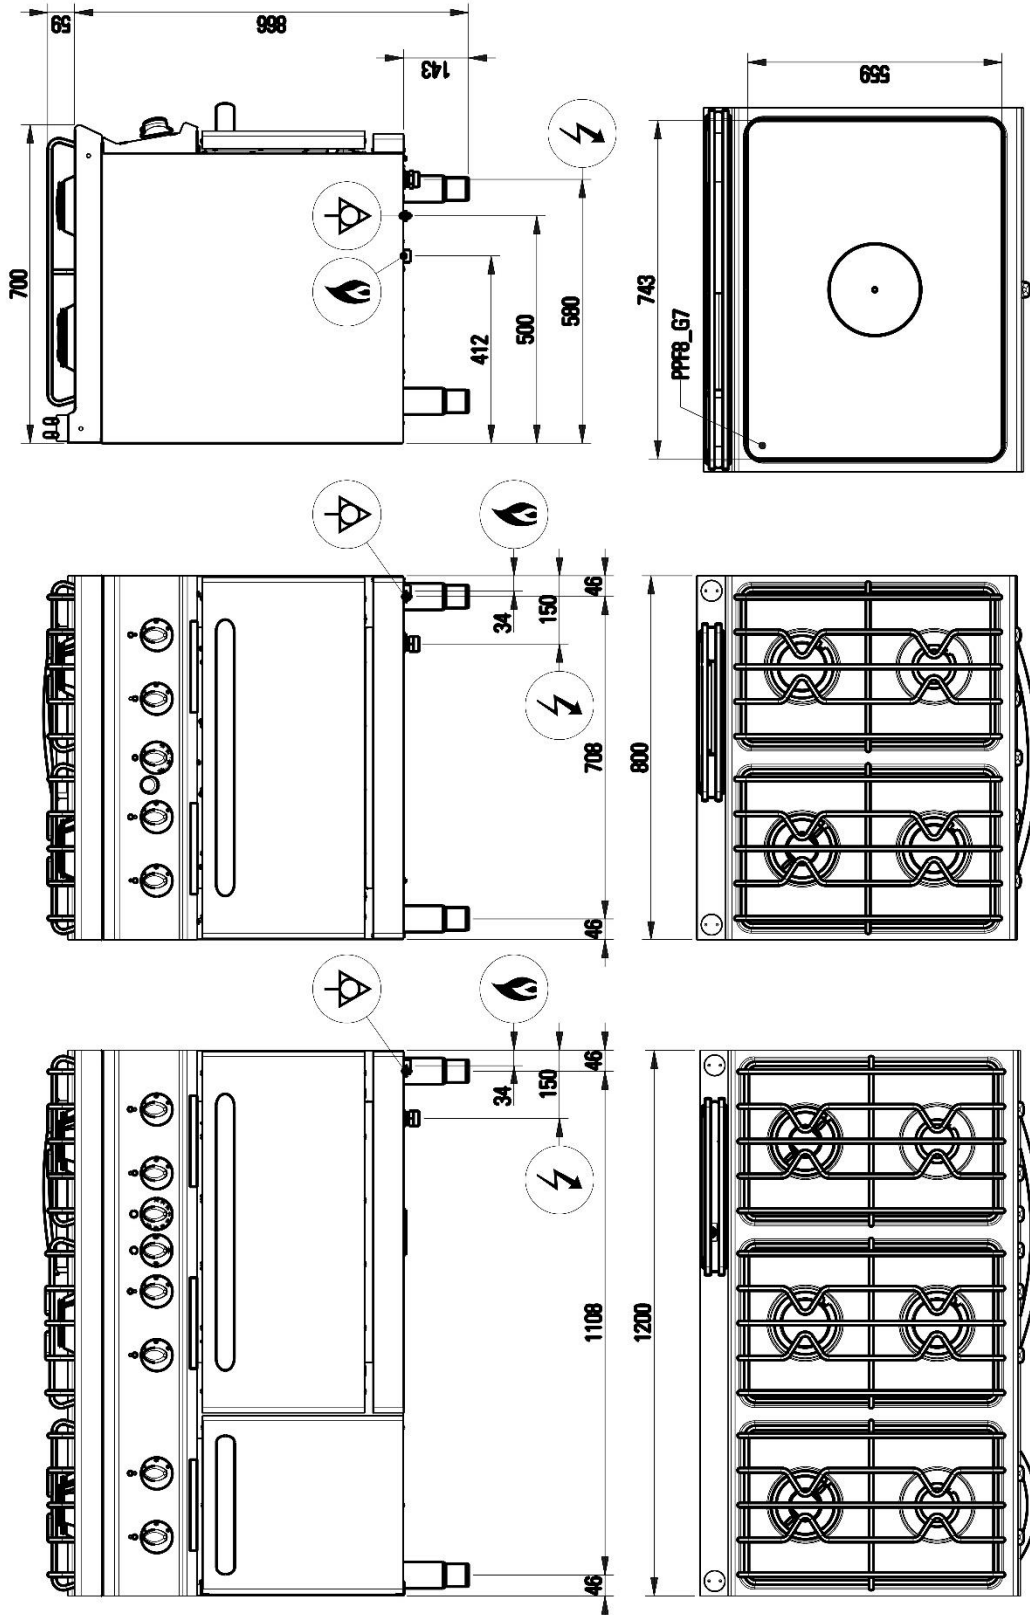


Fig.1 | Abb.1 | pnc.1 - 5415.647.00