


716001

PCR4E7

ELECTRIC BOILING TOP WITH 2 ROUND HERMETIC PLATES (DIAM. 22CM - 8.7 IN, TOP VERSION)



- Electric cook boiling top (40 cm) with 2 cast-iron, round plates (22 cm diameter).
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Cast iron electric plates hermetically sealed to the deep drawn worktop. gasketed to the pressed top.
- 2.6 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are on.
- Setup for installing a water tap.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the electrical network.



TECHNICAL DATA

TOTAL POWER	5,2 kW	ELECTRIC POWER	5,2 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
BOILING TOP POWER	5,2 kW	COOKING ZONE POWER	2x2,6 n°- kW
ELECTRIC PLATE DIMENSIONS	Ø 22 cm	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm ²	ELECTRIC CABLE TYPE	H07 RN-F
ELECTRICAL CONNECTION HEIGHT (H)	35 mm	ELECTRICAL CONNECTION HEIGHT (X)	321 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	15 mm
FOOT ADJUSTMENT	15/25 mm	IPX RATING	4
WIDTH	40 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	81,0 cm
PACKAGE DEPTH	47,0 cm	PACKAGE HEIGHT	56 cm
NET WEIGHT	16,6000 kg	GROSS WEIGHT	22,0000 kg
VOLUME	0,21 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	416.0 W	SENSIBLE HEAT RELEASE	1040.0 W
STEAM RELEASE	613.6 g/h		

ACCESSORIES

799506 PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

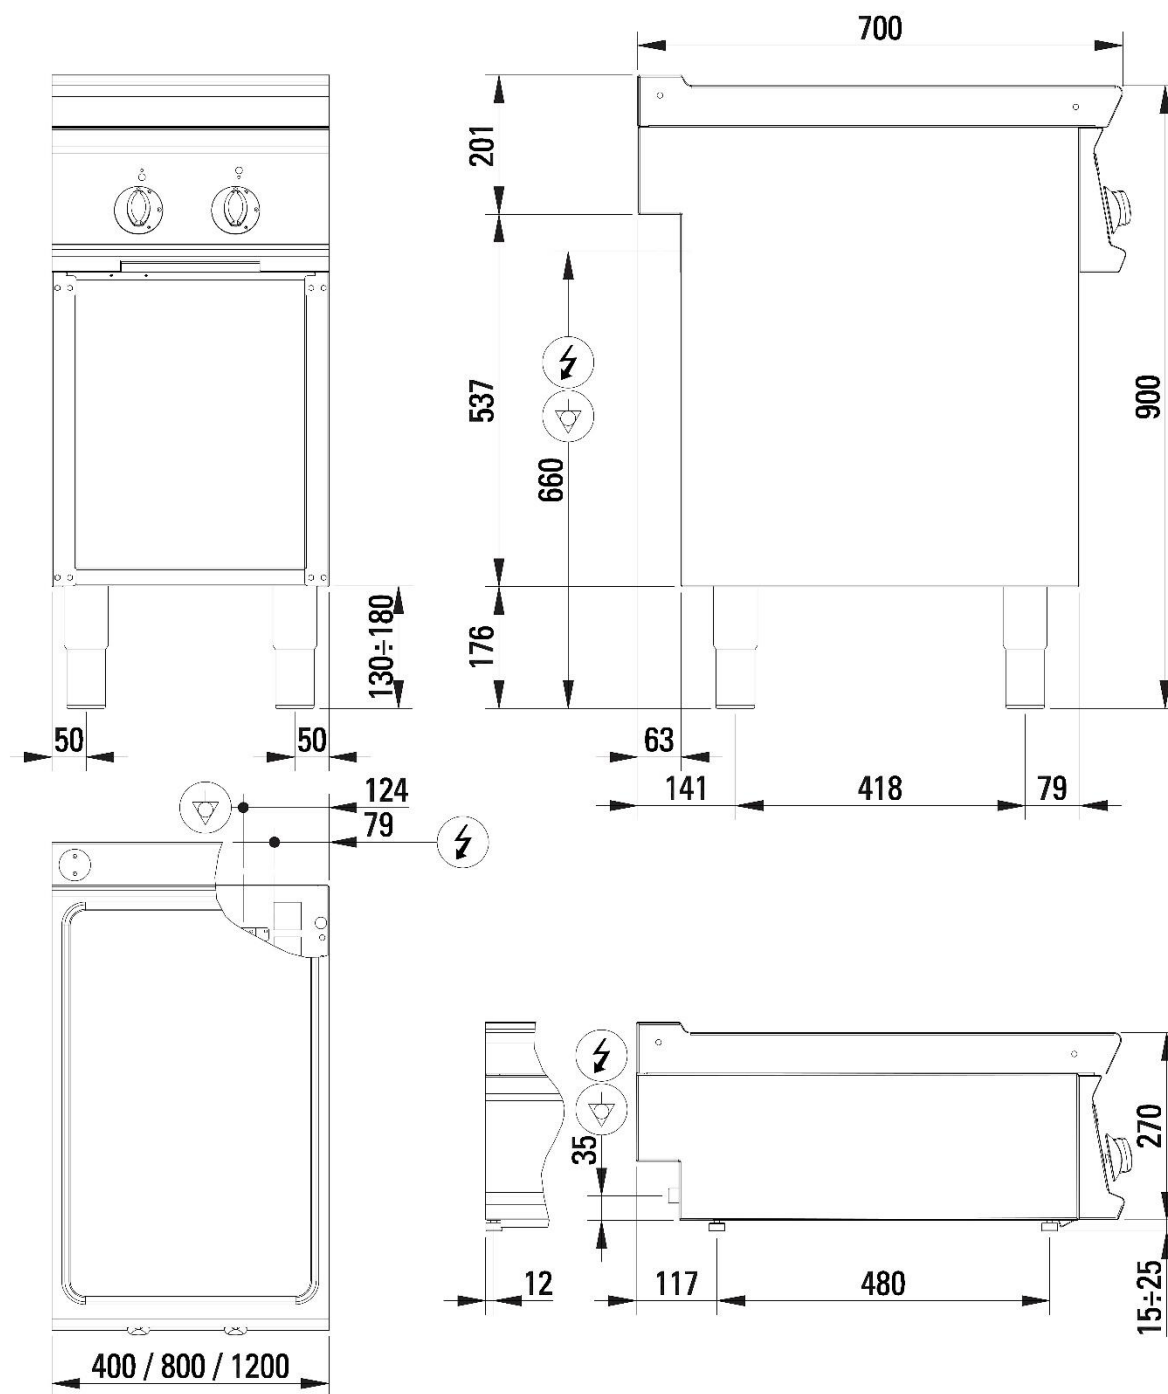


Fig.1 | Abb.1 | рис.1 - 5415.648.00